




Our Technologies, Your Tomorrow



2013 ECo·lution

High Performance Air-Conditioning

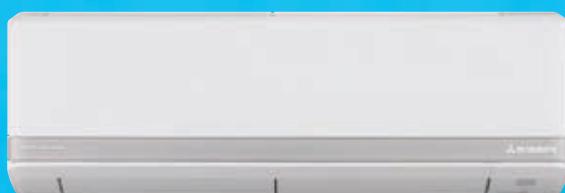

SR series

Residential Air Conditioners

50Hz

13R01E



SRK ZJX

Wall Mounted type

The industry's highest levels
SEER 7.18
(in the cooling mode)

3D AUTO
Programmed air distribution

Sophisticated design

Quiet operation



Eco-lution

**Industry leading energy efficiency
and high reliability
from our advanced technology.**

Movable air inlet panel

Applying a movable air inlet panel, minimization of air resistance and advanced design are realized.



Consideration for the Environment

Several radical design changes and engineering developments have brought about a vast improvement in energy efficiency and environmental protection.

ENERGY LABEL

SEER and SCOP is defined in European regulations listed below.

No.626/2011 of 4 May 2011: energy labeling of air-conditioners (below cooling capacity 12kW).
No.206/2012 of 6 March 2012: requirement for air-conditioners and comfort fans.

Seasonal efficiency is the new way of rating the true efficiency of heating and cooling products over an entire year.


Set by the EU's new regulation implementing Eco-Design Directive for Energy Related Product (ErP) which specifies the minimum efficiency of air-conditioners manufacturers must integrate into their products.

The new Seasonal Efficiency rating system that must be used for heating and cooling by all manufacturers are;

SEER - Seasonal Efficiency Ratio (value in cooling)

SCOP - Seasonal Coefficient of Performance (value in heating)

The new rating system will indicate the true efficiency of the energy using product at specified condition.

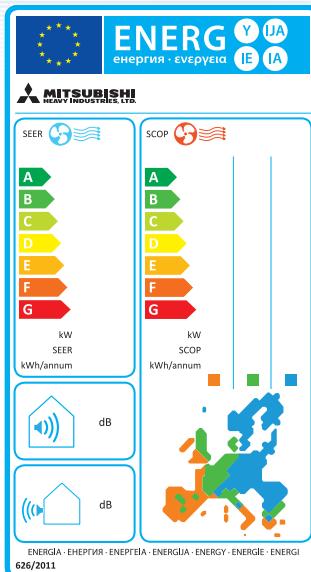

Employment of lead-free solder

Adapted to RoHS directive

RoHS: Restriction of Hazardous substances

In order to avoid the release of hazardous substances into the environments, all models have utilized lead-free solder application. It has been considered to be difficult to use lead-free solder for practical applications because it requires higher solder temperatures at assembly, which can jeopardize reliability. However our PbF soldering method can produce a higher quality lead-free printed circuit board.

Employment of R410A

All models use refrigerant R410A characterized by the ozone depletion coefficient being 0.

Excellent Energy Saving

High performance and excellent energy savings are achieved at the same time by heat exchanger's increased capacity and employment of high efficiency DC motor.

Applied models
All inverter models



QUICK & HIGH EFFICIENCY Control DC PAM inverter

An inverter driven system has a number of performance advantages over a constant speed system. For example, its variable compressor outputs can ensure quick heating after a startup and attain a set temperature more quickly.

Then, the air conditioner can slow down its compressor speed to save energy, keeping comfortable conditions. Moreover, the compressor is DC driven, so it provides higher performance.



DC compressor motor

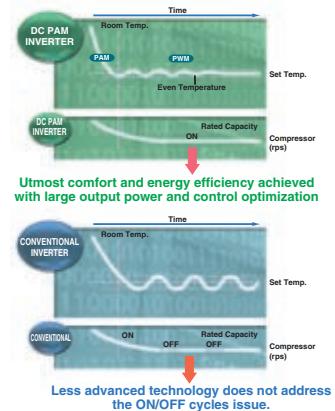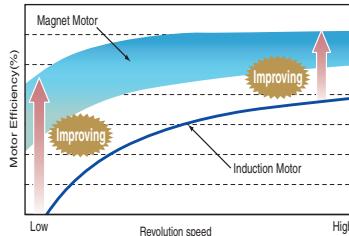

Applied models
All inverter models

New Inverter Control (Vector control)

The new inverter control, with the advanced vector control technology, functions at high efficiency.

- Smooth operation from low speed to high speed
- Smooth Sine Voltage Wave form are attained
- Energy efficiency is further improved in low speed range

• Applied models
All inverter models

Our latest technologies

New propeller fan

Matching a new propeller fan with a fan motor has been optimized in order to keep the same capacity as that of previous models with less electrical consumption. Synergy effect with leaf grill has increased efficiency by 5% and quietened the sound. (SRC40/50/60ZJX)



Serration fan


Coated PCB

The printed wiring board of the outdoor unit is coated. It lasts long having a tolerance for humidity.



Energy saving leaf shape grill

The radial shape grill has been developed in order to send airflow efficiently out unit along the grill. Decreasing the load for motor and propeller fan leads to greater energy efficiency and contributes to quieter sound. (except SRC-ZK,SRC25/35ZMP)

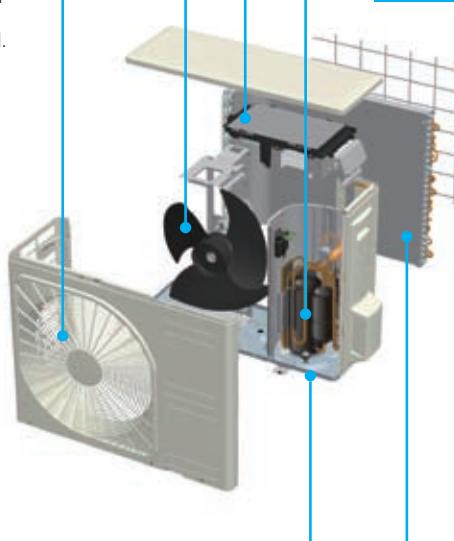

High efficiency DC twin rotary compressor

The newly developed DC twin rotary compressor performs highly efficient operation under the wide range conditions from low speed to high speed. Besides low vibration, low sound level and high efficiency can be also achieved by the optimization of mechanical parts dimension and by the application of high power Neodymium motor. (SRC40/50/60ZJX, SCM series)




Superior corrosion resistance hot dipping steel sheet

Superior corrosion resistance hot dipping steel sheet is applied at the base of outdoor units. It has superior corrosion resistance and scratch resistance properties compared to conventional materials.



Indoor unit

Our optimal combination of fin configuration and copper tube has maximized airflow volume without expanding indoor unit's size in width. The heat exchanger efficiency rate has been drastically improved by 33% compared with that of previous models. New fin can maximize airflow volume and save energy simultaneously. (except SRK-ZMP)

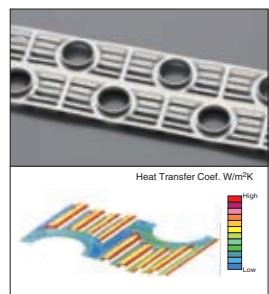

Outdoor unit

Thanks to changing fin configuration from flat sheet to new M shape fin, efficiency has increased by 10%. This high dimensional structure provides optimum balance of heat transfer and airflow.




3D AUTO Vertical + Horizontal AIR SCROLL

3 motors make 3 independent controls




Applied models
SRK-ZJX, SRK-ZJ
SRK-ZK, 63/71HE
Manual Setting only

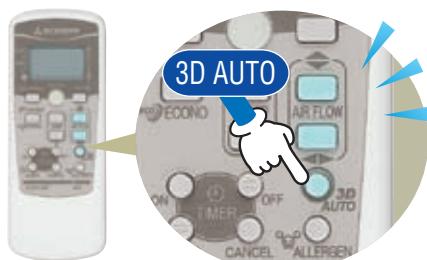

3D AUTO is one touch programmed and three motors (one vertical working motor + two horizontal working motors) make three independent air flow controls. The uniform and quiet airflow can be delivered to every corner of the room, achieving economical operation and minimizing energy loss.

Programmed 3D AUTO

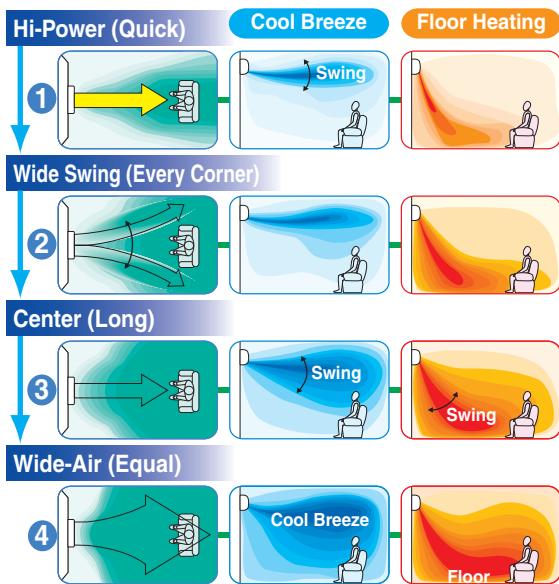


Thanks to automatic control of air flow volume and air flow direction, comfortable air conditioning of the entire room can be done effectively.

The cooled air flows directly to the ceiling in cooling operation mode, not directly at the occupants of the room. Comfort cooled air flow comes via the ceiling like a cool breeze.

In the heating mode, warm air flow can be sent down to the floor directly. The warm air then spread along the floor achieving optimum comfort.

Manual Setting

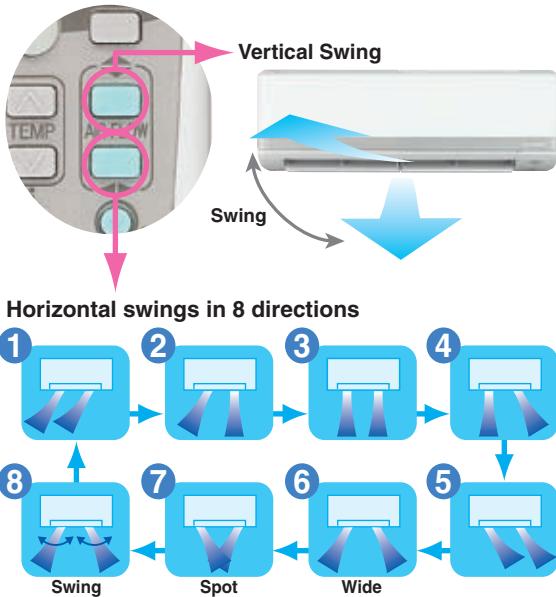

The airflow direction from the right and left louvers can be controlled individually. Eight different air flow patterns can be selected.


Aircraft technology was used in the design of the air conditioner's airflow system

Jet Air Scroll Long Reach & Silent Air Flow

Applied models
All SRK

We used the same aerodynamic analysis technology as used in developing jet engines.

CFD (computational fluid dynamics), used in blade shape design of jet engines, has been applied to the design of air channels in air conditioners to develop the ideal air channel system (air circulation). The jet air stream generated by this air channel system can bring large volume air without consuming much power. While at the same time, it delivers a uniform gentle breeze to every corner of the room.

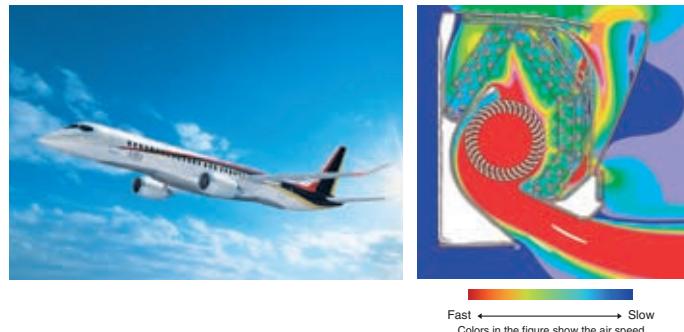

Long Reach Air Flow

Powerful airflow is realized by Jet technology. Good for large living rooms and shops. Increase your comfort.




Applied models
SRK50/60ZJX,
SRK-ZK,
SRK63/71HE



Installation Positioning

The air flow direction can be set to suit your room's configuration.


Applied models
SRK-ZJX, SRK-ZJ

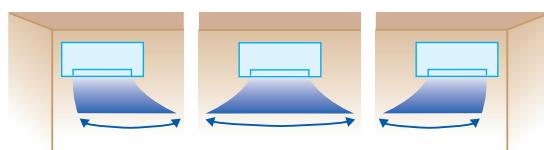

New louver

Our newly redesigned louver has 80% more surface area. Air flow direction can now be more targeted.

Applied models
SRK-ZJX

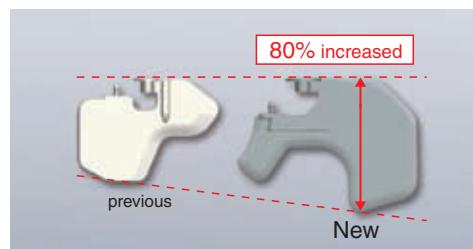

Clean Air



Applied models
SRK-ZJX, SRK-ZK,
SRK-HG, SRK-HE



Generates the same amount of negative ions as a forest environment

24-hour ION

The air conditioner main body employs a tourmaline-coated sheet. The sheet generates negative ions around the clock. Even when the air conditioner is not running, it generates as many negative ions (2,500– 3,000/cc) as in a forest, stream or fall does, allowing you to experience them without incurring any electrical charges.

Applied models
SRK-ZJX, SRK-ZK,
SRK-ZJ, SRK-ZMP,
SRK-HG, SRF-ZJX,
SRK-ZJ




Always keeping the indoor unit clean

Self Clean Operation

"Self clean operation" is operated for 2 hours after the unit has stopped its normal operation.

The indoor unit is dried up and the growth of mold is restrained. Users can select whether this mode is utilized or not.

Situation of mold after one week

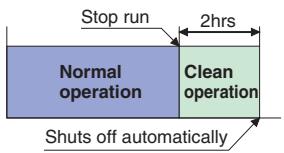

When you don't execute "Self Clean Operation"

Fungal mycelia expand.



Spore of mold

When you execute "Self Clean Operation"

The spore of mold doesn't germinate.



Spore of mold

Applied models
SRK-ZJX, SRK-ZK,
SRK-ZJ




Push ALLERGEN Mode

The air in your room is kept fresh

Allergen Clear System

"Allergen clear system" is equipped to suppress the influence of the allergen caught by the filter by controlling the temperature and humidity.

In case of Multi-split system, Allergen Clear System is not available.
If [Allergen] button is pushed by mistake, the indoor unit will stop.

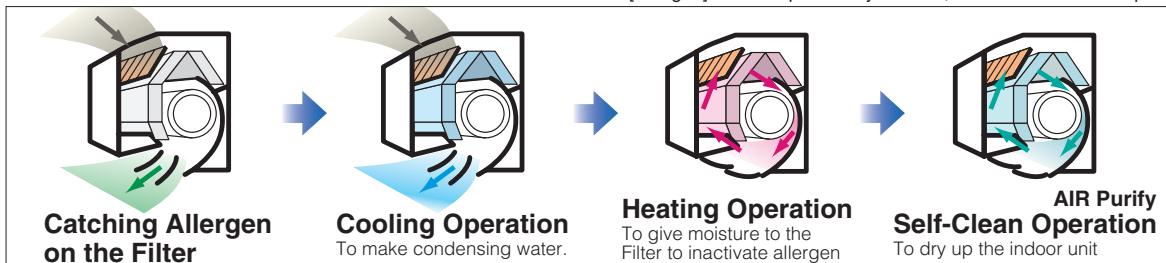


This is the original and only technology to control the temperature and humidity for inactivating allergens

Allergen Clear Filter

Enzyme + Urea deactivates allergens and kills bacteria.



The allergen clear filter breaks down the pollen, lice, and allergens that live on cat skins, etc. and deactivates them. The secret of deactivation is the Enzyme-urea compound. It deactivates not only allergens but also all kinds of bacteria, molds and viruses. Even if allergens and bacteria, etc. fly off of the filter, they are deactivated, so the air in your room is kept fresh.

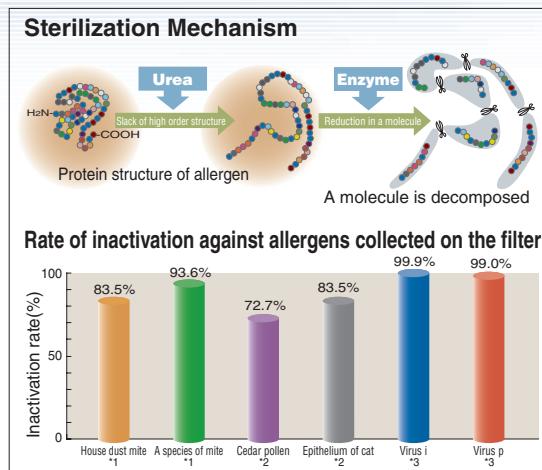

*1 Test method:
ELISA colorimetric method / ELISA fluorescent method
Laboratory:
Independent administrative agency national hospital mechanism Sagamihara Hospital, No.1536

*2 Test method:
ELISA colorimetric method
Laboratory:
Independent administrative agency national hospital mechanism Sagamihara Hospital, No.1536

*3 Test method:
TCID (Infection value 50%)
Laboratory:
Foundation of Kitazato Environmental Science Center, No.15-045

Sure to destroy fungi and bacteria, also effective on viruses and allergenic compounds (Cat hair, dust mite, pollen etc.)


Natural Enzyme Filter

The first release in this range of the enzyme-sterilizing filter




Enzymes used in these filters are naturally occurring lytic enzymes.

The lytic enzymes attack cell walls of microorganisms trapped on a filter and destroy them and doing so, have a powerful sterilizing which will effect decrease the number of molds and bacteria. Natural Enzyme Filter will clean and sanitize air passing through it to keep air in the room clean and safe.

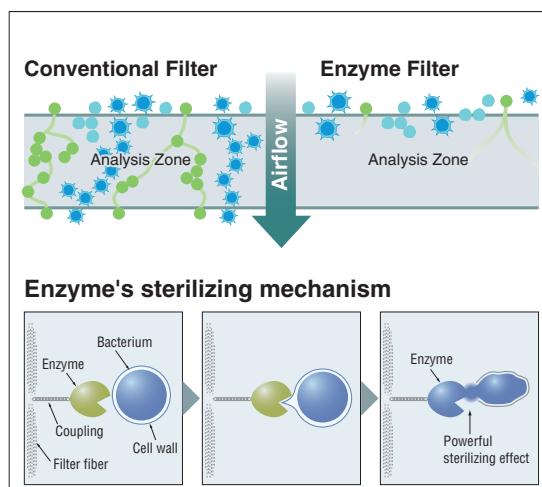


The deodorizing ability of this filter can be easily restored simply by cleaning and exposing to the sunlight

Photocatalytic Washable Deodorizing Filter

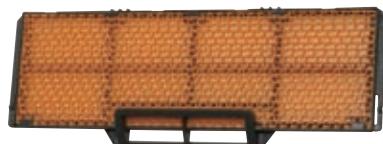

It will keep the air fresh by deodorizing the molecules causing odor. Its deodorizing power can be restored by washing with water and drying under the sun, as such it is a Recycling deodorizing filter capable of repeat use.

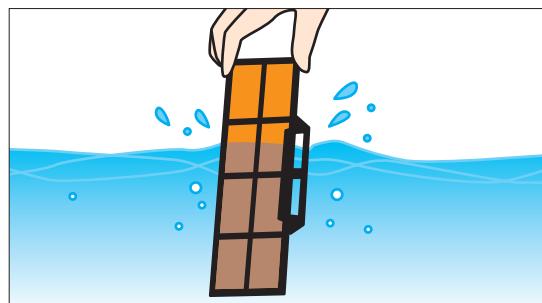


Used in models

| Filter | Indoor Unit | SRK-ZJX | SRK-ZK | SRK-ZJ | SRK-ZMP | SRF-ZJX | SRK-HG | SRK-HE |
|--|-------------|---------|--------|--------|---------|---------|--------|--------|
| Allergen Clear Filter | 1pc | 1pc | 1pc | — | — | — | — | — |
| Natural Enzyme Filter | — | — | — | — | 1pc | 1pc | 1pc | 1pc |
| Photocatalytic Washable Deodorizing Filter | 1pc | 1pc | 1pc | — | 1pc | 1pc | 1pc | 1pc |

Anti-microbial specifications and design will deliver cleanliness and safety

Anti-microbial fan

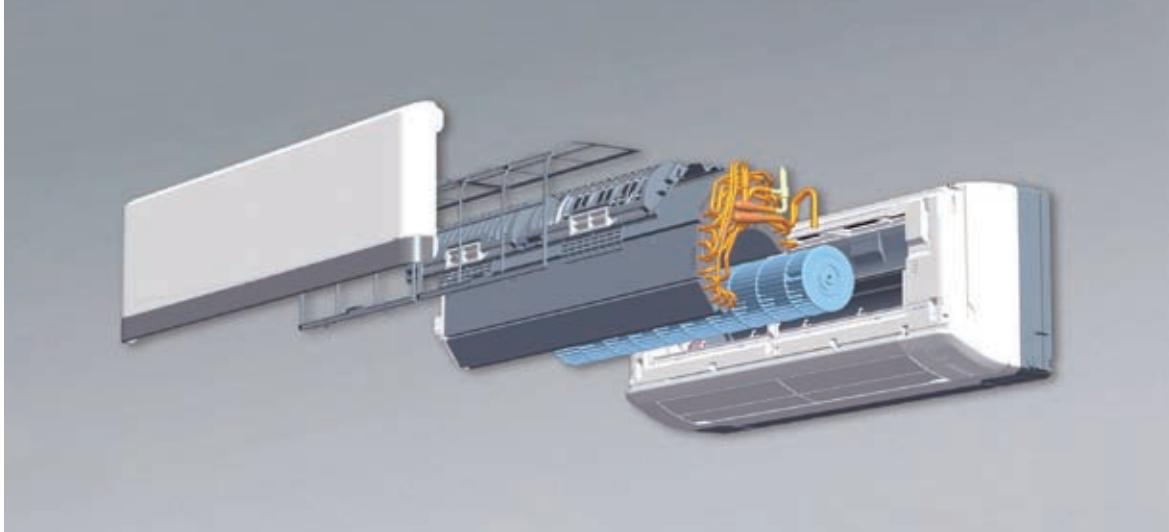

The fan has undergone anti-microbial treatment to resist mold and germs, making the system clean and safe. Foul odors and molds, etc. which can occur when an air conditioning system is not in operation are prevented.

- Intestinal bacteria (Escherichia coli IFO 3972)
- Staphylococcus aureus subsp. aureus IFO 12732

Testing Authority: Japan Food Analysis Center

Test Results Issued: 2004-4-7.

Test Report No.: 104034022-001

Tests were conducted with reference to the antimicrobial strength tests in JIS Z 2801 2000 "Antimicrobial Products-Antimicrobial Test Method" -5.2 Antimicrobial Effects: Test Methods for Plastic Products, etc.

- Apergillus niger IFO 6341

Testing Authority: Japan Food Analysis Center


Test Results Issued: 2004-4-23.

Test Report No.: 104034022-002

Tests were conducted with reference to the antimicrobial strength tests in JIS Z 2801 2000 "Antimicrobial Products-Antimicrobial Test Method" -5.2 Antimicrobial Effects: Test Methods for Plastic Products, etc.



Comparison of growth of bacteria and mold on fan surfaces (microscopic image)

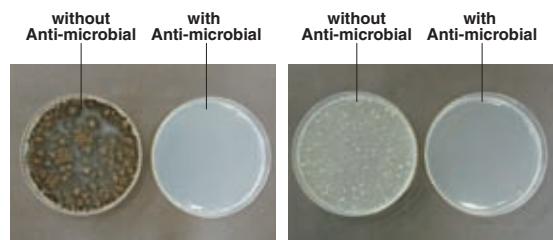

Aspergillus niger IFO 6341

Escherichia coli IFO 3972

In tests conducted at the Mitsubishi Heavy Industries Nagoya Research Lab, 24 hrs after contact with bacteria, cultured on agar media.

Live Bacteria Count on Measured Test Pieces

| Tested Contaminant | Measurement | Test Pieces | Bacteria Count Per Test Piece | | |
|---------------------------|---------------------------|-----------------------------|-------------------------------|--------------------------|--------------------------|
| | | | Measurement 1 | Measurement 2 | Measurement 3 |
| Escherichia coli IFO 3972 | Immediately after contact | Not treated | 1.9×10^5 | 1.6×10^5 | 1.3×10^5 |
| | After 24 hrs at 35°C | Test piece 1 Not treated | <10 3.8×10^6 | <10 4.9×10^6 | <10 7.2×10^6 |
| Staphylococcus aureus | Immediately after contact | Not treated | 1.4×10^5 | 1.6×10^5 | 1.3×10^5 |
| | After 24 hrs at 35°C | Test piece 1 Not treated | <10 8.6×10^5 | <10 4.5×10^5 | <10 3.6×10^5 |
| Aspergillus niger | Immediately after contact | Not treated | 1.5×10^4 | 2.2×10^4 | 1.6×10^4 |
| | After 24 hrs at 35°C | Test piece 1 Not treated | <10 1.0×10^4 | <10 1.2×10^4 | <10 2.5×10^4 |


Test Pieces 1) Products with Antimicrobial and Antifungal Treatment

Wide Operation Range

Heating and cooling operations are possible at an outdoor temperature as low as -15°C .

Our new advanced technology has expanded the heating and cooling operation range.

This permits installation of the units considering a heating and cooling operation under a low temperature condition down to -15°C .

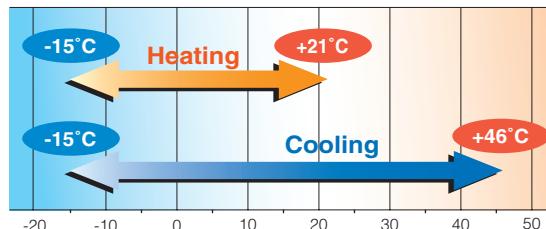


*For the capacities under low temperature conditions, refer to technical manual.

Hi quality air long reach & silent flow Quiet Operation


This is the secret of quiet operation.

In addition to a jet airflow system delivering uniform winds to every corner, it has an optimized serration stabilizer configuration, which ensures smooth wind flow. It makes it possible to lower operation noises further by minimizing the interaction between wind flows and the fan.

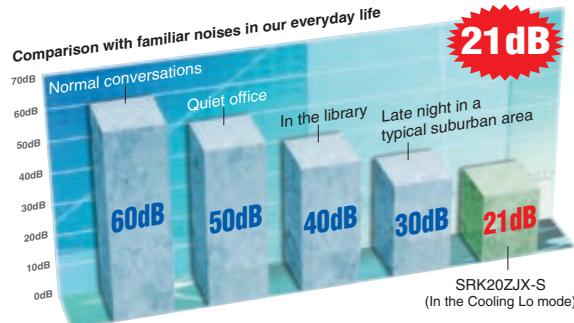

Three Sensors

Control of room temperature and humidity is very important for people to live a comfortable life. Use of three sensors to control indoor temperature, indoor humidity and outdoor temperature enable unit to obtain optimum air-conditioning.

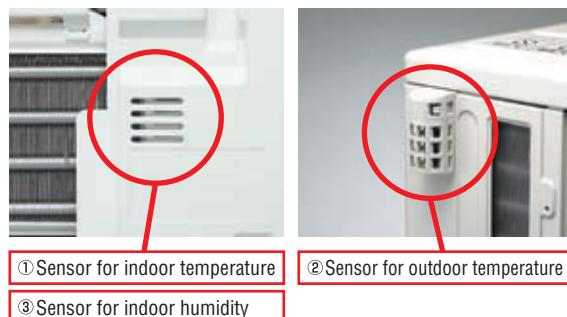


① Sensor for indoor temperature

② Sensor for outdoor temperature

③ Sensor for indoor humidity


Washable filter and easy cleaning of air inlet panel

Removing air filter is quite easy. Keeping air filter clean is effective way to save energy and to keep the original powerful performance. Air inlet panel is also removable and can be cleaned easily.

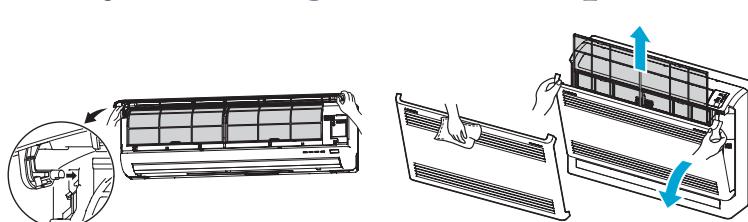

Long piping length


Piping length has been extended and design flexibility has been improved.

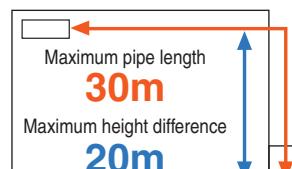


Applied models
① ② All SRK, SRF, SRR, FDTC
③ SRK50/60ZJX, SRK-ZK, SRK35/50ZJ, SRK35/45ZMP, SRF-ZJX

Applied models
All SRK, SRF

Product Line Up

| Model | | Capacity Range (kW : Rated cooling capacity) | | | | | | | | | | | page | |
|-----------------------------|---|---|---|---|---|---|-----|--|---|--|---|---|--|----|
| | | 2.0 | 2.5 | 2.8 | 3.5 | 4.0 | 4.5 | 5.0 | 5.6 | 6.0 | 6.3 | 7.1 | 8.0 | |
| HEAT PUMP DC INVERTER | SRK-ZJX *2   |  20ZJX-S |  25ZJX-S | |  35ZJX-S | | |  50ZJX-S1 | |  60ZJX-S2 | | | 14 | |
| | SRK-ZK *2   | | | | | | | | | |  63ZK-S |  71ZK-S |  80ZK-S | 15 |
| | SRK-ZJ *2   |  20ZJ-S |  25ZJ-S | |  35ZJ-S | | |  50ZJ-S | | | | | 16 | |
| | SRK-ZMP   | | |  25ZMP-S | |  35ZMP-S | |  45ZMP-S | | | | | 17 | |
| HEAT PUMP CONSTANT SPEED | SRK-HG *1  |  20HG-S | |  26HG-S | |  40HG-S | | | | | | | 18 | |
| | SRK-HE *1  | | | | | | | |  50HE-S1 |  56HE-S1 |  63HE-S1 |  71HE-S1 | | 19 |
| HEAT PUMP DC INVERTER | SRF-ZJX *2  | |  25ZJX-S | |  35ZJX-S | | |  50ZJX-S1 | | | | | 20 | |
| | SRR-ZJ *2  | |  25ZJ-S | |  35ZJ-S | | | | | | | | 22 | |
| | FDTC-VF *2 <small>Fits into standard 600 x 600 ceiling</small>  | |  25VF | |  35VF |  40VF | |  50VF | |  60VF | | | 23 | |

| Model | | 2.0 | 2.5 | 3.5 | 4.0 | 4.5 | 5.0 | 6.0 | 7.1 | 8.0 | 100 | 125 | page |
|------------------------|---|---|---|---|--|--|--|---|---|--|--|-----|------|
| INVERTER Free-Multi | SRK-ZJX *2   |  20ZJX-S |  25ZJX-S |  35ZJX-S | | |  50ZJX-S1 |  60ZJX-S2 | | | | | 26 |
| | SRK-ZK *2   | | | | | | | | |  71ZK-S | | | 26 |
| | SRK-ZJ *2   |  20ZJ-S |  25ZJ-S |  35ZJ-S | | |  50ZJ-S | | | | | | 27 |
| | SRF-ZJX *2  | |  25ZJX-S |  35ZJX-S | | |  50ZJX-S1 | | | | | | 27 |
| | SRR-ZJ *2  | |  25ZJ-S |  35ZJ-S | | |  50ZJ-S |  60ZJ-S | | | | | 28 |
| | FDTC-VF *2 <small>Fits into standard 600 x 600 ceiling</small>  | |  25VF |  35VF | | |  50VF |  60VF | | | | | 28 |
| | FDUM-VF  | | | | | |  50VF | | | | | | 29 |
| | FDEN-VF  | | | | | |  50VF | | | | | | 29 |
| OUTDOOR UNIT SCM |  | | | |  40ZJ-S |  45ZJ-S |  50ZJ-S1 |  60ZJ-S1 | | | | | 25 |
| |  | | | | | | | |  71ZJ-S1 |  80ZJ-S1 | | | 25 |
| |  | | | | | | | | |  100ZJ-S1 |  125ZJ-S1 | *3 | 25 |

*1 Not available in EU/EEA

*2 Common to the both cases

*3 Energy label applies below cooling capacity 12kW.

Clean Operation / Filter



Allergen Clear System

The system is equipped to suppress the influence of the allergen caught by the filter by controlled the temperature and humidity.



Self Clean Operation

The operation is operated for 2 hours after the unit has stopped its normal operation. The indoor unit is dried up and growth of mold is restrained.



Allergen Clear Filter

The filter breaks down the pollen, lice, and all allergens that live on cat skins, etc. and deactivates them.



Natural Enzyme Filter

Enzymes used in the filter are naturally occurring lytic enzymes which attack cell walls of microorganisms trapped on the filter and destroy them.



Photocatalytic Washable Deodorizing Filter

It keeps air fresh by deodorizing the molecules causing odor. The deodorizing ability can be easily restored simply by cleaning and exposing to the sunlight.

Comfortable Functions



Fuzzy Auto Mode

Automatically, the unit determines its operating mode and temperature setting based on a fuzzy calculation, and adjusts the inverter frequency.



Automatic Operation

The air conditioner automatically selects from among heating, cooling and dry operations.



"HI POWER" Operation

The unit can operate continuously in "HI POWER" mode for 15 minutes. This mode is convenient to reach the desired temperature quickly.



Three "Hot" System

This series offers three "hot" systems. "Hot start" allows the unit to begin operating immediately, while the "hot spurt" fast-heating system works to increase the temperature setting by two degrees. The "hot keep" system is used during automatic defrosting or to prevent the influx of cool air. These three operational control systems help ensure comfortable and efficient heating.

Comfortable Air Flow Functions



3D Auto

You can choose the best cooling or heating pattern by only pushing one button.



Auto Flap Mode

Whatever the operating mode is, the unit automatically selects the optimal angle.



COOLING & DRY

Horizontal blowing



HEATING

Slant forward blowing



Memory Flap

While the flap is swinging, it can be stopped at any angle desired. The flap returns to the position that it was in when operation last stopped.



Air Scroll

The swing of the flap causes the air flow to spiral as it reaches the floor, and breeze reaches all of a room.



COOLING & DRY

Red line : moves quickly

Black line : moves slowly



Up/Down Flap Swing

Flap moves up and down continuously. The Up/Down flap swing can be fixed at the preferred operation angle.



Right/Left Louver swing

Louver moves right and left continuously. The Right/Left louver swing can be fixed at the preferred operation angle.



Air Outlet Selection

Both lower and upper air outlets and upper air outlet can be selected.

Convenience & Economy Functions



On Timer

This facility enables the operation to start a little earlier, so that the room approaches optimum temperature at ON time when the operation is started by ON-TIMER. Thus it will try to be at the temperature you want, when you want.



Economy Mode

The unit realizes effective energy saving operation, while still keeping a comfortable cooling and heating condition.



Dry Operation

The unit dehumidifies the room by intermittent cooling operation.



Off Timer

The unit stops automatically at the set time.



24-hour On/Off Programmable Timer

By combining a start timer with a stop timer, you can register two timer operations a day. Once set, timers will faithfully start or stop the system at a specified time of the day repeatedly.



Sleep Mode

The room temperature is automatically controlled during the set sleep mode period, ensuring that room temperature will not get too cold or too hot.

Maintenance & Prevention Functions



Microcomputer-Operated Defrosting

This mode automatically eliminates frost, and helps minimize excessive operation in other modes.




Self-Diagnostic Function

In the case that the air conditioner malfunctions, an internal microcomputer automatically runs a self-diagnosis. (Inspection and repair should be performed by authorized dealers.)



Detachable Indoor Air Inlet Panel

The air inlet panel on the indoor unit opens and closes easily, making filter cleaning simple. The suction panel can also be removed.

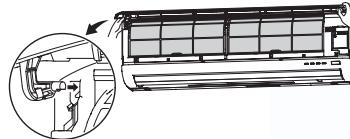

When removing the air inlet panel for internal cleaning or others, open the grill and then pull it to this side.

Others



Back-up Switch

On the main unit, there is a backup on/off switch, which is useful when you can't use remote control, or batteries are flat.



Auto Restart Function

Power blackout auto restart function is a function that records the operational status of the air-conditioner immediately prior to it being switched off by a power cut, and then automatically resumes operations at that point after the power has been restored.



24-hour ION

Tourmaline-coated sheet generates negative ions around the clock. Even when the air conditioner is not running, it generates as many negative ions as a forest, stream or fall does, allowing you to experience them without incurring any electricity charges.



Luminous Button

With wireless "Luminous" remote controls that even "glow in the dark", it is possible to operate all desired functions of the unit with the click of a button.

INVERTER HEAT PUMP MODEL



SRK-ZJX

Wall Mounted type



**SRK20ZJX-S, SRK25ZJX-S, SRK35ZJX-S
SRK50ZJX-S1, SRK60ZJX-S2**



All SRK-ZJX series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.



SRK50/60ZJX can be selected for use as indoor units in the combination with V Multi system outdoor unit. Refer to our Inverter Packaged Air-Conditioners brochure for details.



Standard equipment



SRC20ZJX-S, SRC25ZJX-S, SRC35ZJX-S



SRC50ZJX-S, SRC60ZJX-S

FUNCTION




Comfortable Air Flow Functions




Convenient & Economy Functions



Refrigerant pipe length



SRK20ZJX-S
SRK25ZJX-S
SRK35ZJX-S



SRK50ZJX-S1
SRK60ZJX-S2

SPECIFICATIONS

| Indoor unit | | SRK20ZJX-S SRC20ZJX-S | SRK25ZJX-S SRC25ZJX-S | SRK35ZJX-S SRC35ZJX-S | SRK50ZJX-S1 SRC50ZJX-S | SRK60ZJX-S2 SRC60ZJX-S |
|-------------------------------------|-------------------------|---------------------------|---|--------------------------|---------------------------|---------------------------|
| Power source | | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 2.0 (0.9~3.1) | 2.55 (0.9~3.2) | 3.5 (0.9~4.1) | 5.0 (1.1~5.8) | 6.1 (1.1~6.8) |
| Nominal heating capacity (Min~Max) | kW | 2.5 (0.9~4.3) | 3.13 (0.9~4.7) | 4.3 (0.9~5.1) | 6.0 (0.6~7.7) | 6.8 (0.6~8.2) |
| Power consumption | Cooling/Heating | 0.35 / 0.45 | 0.49 / 0.595 | 0.845 / 0.96 | 1.30 / 1.36 | 1.87 / 1.67 |
| EER/COP | Cooling/Heating | 5.71 / 5.56 | 5.20 / 5.26 | 4.14 / 4.48 | 3.85 / 4.41 | 3.26 / 4.07 |
| Inrush current | 220/230/240 V | A 2.4 / 2.3 / 2.2 | 3.1 / 2.9 / 2.8 | 4.6 / 4.4 / 4.2 | 6.2 / 6.0 / 5.7 | 8.6 / 8.2 / 7.9 |
| Max. running current | | 8 | 8 | 8 | 15 | 15 |
| * Sound power level | Indoor | 53 / 54 | 55 / 58 | 58 / 59 | 60 / 64 | 64 / 64 |
| | Outdoor | 60 / 59 | 60 / 60 | 63 / 62 | 63 / 63 | 65 / 64 |
| * Sound pressure level | Indoor | 39 / 30 / 21 | 41 / 31 / 22 | 43 / 33 / 22 | 47 / 40 / 27 | 51 / 41 / 29 |
| | Outdoor | 38 / 33 / 25 | 41 / 34 / 27 | 42 / 35 / 27 | 48 / 40 / 33 | 48 / 41 / 34 |
| Air flow | Cooling (Hi/Me/Lo) | dB(A) 11.5 / 8.0 / 5.0 | 12.5 / 9.0 / 5.0 | 13.5 / 9.5 / 5.0 | 13.5 / 11.0 / 8.0 | 14.5 / 12.5 / 8.5 |
| | Indoor | 12.0 / 9.5 / 7.0 | 13.0 / 10.0 / 7.5 | 14.0 / 11.0 / 8.0 | 17.0 / 14.5 / 10.5 | 17.5 / 15.0 / 11.0 |
| | Outdoor | 29.5 / 27.0 | 29.5 / 27.0 | 32.5 / 29.5 | 39.0 / 33.0 | 41.5 / 39.0 |
| Exterior dimensions | Height x Width x Depth | mm | 309 x 890 x 220 | | | |
| Net weight | Indoor / Outdoor | kg | 595 x 780(+62) x 290 | | 640 x 800(+71) x 290 | |
| Ref.piping size | Liquid/Gas | ø mm | 15 / 38 | | 15 / 45 | |
| Refrigerant line (one way) length | | m | 6.35(1/4") / 9.52(3/8") | | 6.35(1/4") / 12.7(1/2") | |
| Vertical height differences | Outdoor is higher/lower | m | Max.15 | | Max. 30 | |
| Outdoor operating temperature range | Cooling | °C | -15~46 | | | |
| | Heating | | -15~21 | | | |
| Clean filter | | | Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1 | | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

INVERTER HEAT PUMP MODEL



SRK-ZK

Wall Mounted type




SRK63ZK-S, SRK71ZK-S, SRK80ZK-S



SRK71ZK-S can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

Refrigerant pipe length



SRK63ZK-S
SRK71ZK-S
SRK80ZK-S



Standard equipment



SRC63ZK-S, SRC71ZK-S
SRC80ZK-S

FUNCTION



Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| | | SRK63ZK-S | SRK71ZK-S | SRK80ZK-S |
|-------------------------------------|-------------------------|------------------------|---------------------------|---|
| | | SRK63ZK-S | SRK71ZK-S | SRK80ZK-S |
| Power source | | | 1 Phase, 220 - 240V, 50Hz | |
| Nominal cooling capacity (Min~Max) | kW | 6.3 (2.15~7.1) | 7.1 (2.15~8.0) | 8.0 (2.15~8.5) |
| Nominal heating capacity (Min~Max) | kW | 7.1 (1.7~9.5) | 8.0 (1.6~10.0) | 9.0 (1.7~10.5) |
| Power consumption | Cooling/Heating | 1.76 / 1.79 | 2.16 / 2.14 | 2.65 / 2.55 |
| EER/COP | Cooling/Heating | 3.58 / 3.97 | 3.29 / 3.74 | 3.02 / 3.53 |
| Inrush current | 220/230/240 V | 8.5 / 8.1 / 7.8 | 10.1 / 9.7 / 9.3 | 12.4 / 11.9 / 11.4 |
| Max. running current | | 17 | 17 | 17 |
| * Sound power level | Indoor | Cooling/Heating | 59 / 60 | 60 / 61 |
| | Outdoor | Cooling/Heating | 62 / 63 | 66 / 63 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo/Ulo) | 47 / 43 / 37 / 26 | 49 / 45 / 39 / 26 |
| | | Heating (Hi/Me/Lo/Ulo) | 49 / 41 / 36 / 33 | 46 / 43 / 38 / 35 |
| | | Cooling/Heating | 49 / 50 | 53 / 51 |
| Air flow | Indoor | Cooling (Hi/Me/Lo/Ulo) | 18.5 / 16.0 / 13.0 / 8.0 | 19.5 / 17.5 / 14.0 / 8.0 |
| | | Heating (Hi/Me/Lo/Ulo) | 20.5 / 18.0 / 14.5 / 12.5 | 21.5 / 19.5 / 15.5 / 14.0 |
| | Outdoor | Cooling/Heating | 48.5 / 43.5 | 55.0 / 43.5 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | mm | 318 x 1098 x 248 |
| | Outdoor | | | 750 x 880(+88) x 340 |
| Net weight | Indoor / Outdoor | | kg | 15 / 57 |
| Ref.piping size | Liquid/Gas | | ø mm | 6.35(1/4") / 15.88(5/8") |
| Refrigerant line (one way) length | | | m | Max. 30 |
| Vertical height differences | Outdoor is higher/lower | | m | Max. 20 / Max.20 |
| Outdoor operating temperature range | Cooling | | °C | -15~46 |
| | Heating | | | -15~21 |
| Clean filter | | | | Allergen clear filter x 1, Photocatalytic washable deodorizing filter x 1 |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

INVERTER HEAT PUMP MODEL



SRK-ZJ

Wall Mounted type





**SRK20ZJ-S, SRK25ZJ-S
SRK35ZJ-S, SRK50ZJ-S**



All SRK-ZJ series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

Refrigerant pipe length



Standard equipment



**SRK20ZJ-S, SRK25ZJ-S
SRK35ZJ-S**



SRK50ZJ-S

FUNCTION



Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Indoor unit | | SRK20ZJ-S | | SRK25ZJ-S | | SRK35ZJ-S | | SRK50ZJ-S | |
|-------------------------------------|---|--------------------|-----------------|-------------------------|------------------|--------------|------------------|-------------------------|-------------------|
| Outdoor unit | | SRC20ZJ-S | | SRC25ZJ-S | | SRC35ZJ-S | | SRC50ZJ-S | |
| Power source | | | | | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 2.0(1.0~2.7) | | 2.5(1.0~2.9) | | 3.5(1.0~3.8) | | 5.0(1.6~5.5) | |
| Nominal heating capacity (Min~Max) | kW | 2.7(1.2~3.9) | | 3.2(1.2~4.2) | | 4.0(1.3~4.8) | | 5.8(1.6~6.6) | |
| Power consumption | Cooling/Heating | 0.44 / 0.62 | | 0.62 / 0.80 | | 1.01 / 1.00 | | 1.55 / 1.59 | |
| EER/COP | Cooling/Heating | 4.55 / 4.35 | | 4.03 / 4.00 | | 3.47 / 4.00 | | 3.23 / 3.65 | |
| Inrush current | 220/230/240 V | A | 3.2 / 3.1 / 3.0 | | 4.0 / 3.8 / 3.7 | | 4.9 / 4.7 / 4.5 | | 7.3 / 7.0 / 6.7 |
| Max. running current | | | 9 | | 9 | | 9 | | 14 |
| * Sound power level | Indoor | Cooling/Heating | 49 / 52 | | 50 / 55 | | 58 / 59 | | 60 / 61 |
| | Outdoor | Cooling/Heating | 59 / 58 | | 60 / 61 | | 62 / 63 | | 61 / 63 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | 33 / 27 / 21 | | 34 / 28 / 21 | | 42 / 32 / 22 | | 46 / 37 / 26 |
| | Indoor | Heating (Hi/Me/Lo) | 36 / 31 / 24 | | 39 / 31 / 24 | | 43 / 37 / 25 | | 45 / 37 / 31 |
| | Outdoor | Cooling/Heating | 47 / 46 | | 48 / 49 | | 50 / 51 | | 51 / 53 |
| Air flow | Indoor | Cooling (Hi/Me/Lo) | 7.8 / 5.6 / 4.8 | | 7.9 / 6.0 / 5.0 | | 10.1 / 6.4 / 5.0 | | 11.3 / 7.8 / 5.3 |
| | Indoor | Heating (Hi/Me/Lo) | 9.8 / 6.3 / 5.0 | | 10.6 / 6.5 / 5.1 | | 12.8 / 9.4 / 6.1 | | 13.5 / 10.2 / 7.5 |
| | Outdoor | Cooling/Heating | 29.5 / 25.6 | | 32.1 / 25.6 | | 31.5 / 27.8 | | 36.0 / 36.0 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | mm | 294 x 798 x 229 | | | | | |
| | Outdoor | | | 540 x 780(+62) x 290 | | | | 640 x 800(+71) x 290 | |
| Net weight | Indoor / Outdoor | | kg | 9.5 / 32 | | 9.5 / 35 | | 9.5 / 42 | |
| Ref.piping size | Liquid/Gas | | ø mm | 6.35(1/4") / 9.52(3/8") | | | | 6.35(1/4") / 12.7(1/2") | |
| Refrigerant line (one way) length | | | m | Max. 15 | | | | Max. 25 | |
| Vertical height differences | Outdoor is higher/lower | | m | Max. 10 / Max. 10 | | | | Max. 15 / Max. 15 | |
| Outdoor operating temperature range | Cooling | | °C | -15~46 | | | | | |
| | Heating | | | -15~21 | | | | | |
| Clean filter | Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1 | | | | | | | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

INVERTER HEAT PUMP MODEL



SRK-ZMP



Wall Mounted type



NEW

SRK25ZMP-S, SRK35ZMP-S
SRK45ZMP-S

Refrigerant pipe length



Standard equipment



SRK25ZMP-S
SRK35ZMP-S

SRK45ZMP-S

FUNCTION



SPECIFICATIONS

| Indoor unit | | SRK25ZMP-S | | SRK35ZMP-S | | SRK45ZMP-S | |
|-------------------------------------|-------------------------|----------------------|-------------------------|------------------|-------------------------|----------------------|-------------------|
| Outdoor unit | | SRC25ZMP-S | | SRC35ZMP-S | | SRC45ZMP-S | |
| Power source | | | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 2.5(0.9~2.8) | | 3.2(0.9~3.5) | | 4.5(0.9~4.8) | |
| Nominal heating capacity (Min~ Max) | kW | 2.8(0.8~3.9) | | 3.6(0.9~4.3) | | 5.0(0.8~5.8) | |
| Power consumption | Cooling/Heating | 0.78 / 0.755 | | 0.995 / 0.995 | | 1.495 / 1.385 | |
| EER/COP | Cooling/Heating | 3.21/3.71 | | 3.22 / 3.62 | | 3.01 / 3.61 | |
| Inrush current | 220/230/240 V | | A | 3.9 / 3.8 / 3.6 | | 4.9 / 4.7 / 4.5 | |
| Max. running current | | | | 9 | | 9 | 14 |
| * Sound power level | Indoor | Cooling/Heating | | 59 / 58 | | 60 / 58 | 60 / 64 |
| | Outdoor | Cooling/Heating | | 60 / 59 | | 60 / 60 | 65 / 65 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | dB(A) | 45 / 34 / 23 | | 47 / 36 / 23 | 46 / 40 / 25 |
| | | Heating (Hi/Me/Lo) | | 43 / 34 / 26 | | 44 / 36 / 28 | 48 / 43 / 32 |
| Air flow | Outdoor | Cooling/Heating | m³/min | 47 / 45 | | 49 / 48 | 52 / 53 |
| | | Cooling (Hi/Me/Lo) | | 10.1 / 7.3 / 4.2 | | 9.5 / 6.8 / 4.2 | 9.0 / 7.2 / 3.8 |
| | | Heating (Hi/Me/Lo) | | 9.5 / 7.3 / 5.2 | | 9.6 / 7.4 / 5.5 | 12.0 / 9.2 / 6.2 |
| | Indoor | Cooling/Heating | | 26.0 / 19.7 | | 25.4 / 20.5 | 35.5 / 33.5 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | | 262 x 769 x 210 | | | |
| | Outdoor | 540 x 645(+57) x 275 | | | | 595 x 780(+62) x 290 | |
| Net weight | Indoor / Outdoor | kg | 6.9 / 25 | 7.2 / 27 | | 7.6 / 40 | |
| Ref.piping size | Liquid/Gas | ø mm | 6.35(1/4") / 9.52(3/8") | | 6.35(1/4") / 12.7(1/2") | | |
| Refrigerant line (one way) length | | m | Max. 15 | | | | Max. 25 |
| Vertical height differences | Outdoor is higher/lower | m | Max. 10 / Max. 10 | | | | Max. 15 / Max. 15 |
| Outdoor operating temperature range | Cooling | °C | -15~46 | | | | |
| temperature range | Heating | | -15~21 | | | | |
| Clean filter | | | — | | | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

CONSTANT SPEED HEAT PUMP MODEL

SRK-HG

Wall Mounted type




* Not available in EU/EEA



SRK20HG-S, SRK28HG-S, SRK40HG-S



Refrigerant pipe length



SRK20HG-S
SRK28HG-S
SRK40HG-S



Standard equipment



SRC20HG-S, SRC28HG-S,
SRC40HG-S

FUNCTION



SPECIFICATIONS

| Indoor unit | | SRK20HG-S SRC20HG-S | | SRK28HG-S SRC28HG-S | | SRK40HG-S SRC40HG-S | | |
|-------------------------------------|---------|--|----|---------------------------|--|-------------------------|--|--|
| Outdoor unit | | | | 1 Phase, 220 - 240V, 50Hz | | | | |
| Power source | | | | | | | | |
| Nominal cooling capacity (Min~Max) | | kW | | 2.07 | | 2.6 | | |
| Nominal heating capacity (Min~Max) | | kW | | 2.22 | | 2.8 | | |
| Power consumption | | kW | | 0.64 / 0.61 | | 0.81 / 0.77 | | |
| EER/COP | | Cooling/Heating | | 3.23 / 3.64 | | 3.21 / 3.64 | | |
| Inrush current | | A | | 18.9 | | 17.2 | | |
| * Sound power level | Indoor | Cooling/Heating | | 52 / 52 | | 55 / 56 | | |
| | Outdoor | Cooling/Heating | | 60 / 60 | | 60 / 60 | | |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | | 34 / 30 / 27 | | 39 / 33 / 30 | | |
| | Outdoor | Heating (Hi/Me/Lo) | | 34 / 31 / 27 | | 40 / 33 / 29 | | |
| Air flow | Indoor | Cooling/Heating | | 46 / 46 | | 46 / 46 | | |
| | Indoor | Cooling (Hi/Me/Lo) | | 7.5 | | 8.5 | | |
| | Outdoor | Heating (Hi/Me/Lo) | | 7.5 | | 10.0 | | |
| | Outdoor | Cooling/Heating | | 27.0 / 27.0 | | 29.0 / 29.0 | | |
| | | | mm | | | | | |
| Exterior dimensions | | HeightxWidthxDepth | | 268 x 790 x 199 | | | | |
| | | | | 540 x 780(+62) x 290 | | | | |
| Net weight | | Indoor / Outdoor | | kg | | 8.5 / 29 | | |
| | | | | | | 8.5 / 31 | | |
| Ref.piping size | | Liquid/Gas | | ø mm | | 6.35(1/4") / 9.52(3/8") | | |
| | | | | | | Max. 15 | | |
| Refrigerant line (one way) length | | | | m | | Max. 10 / Max. 10 | | |
| Vertical height differences | | Outdoor is higher/lower | | m | | | | |
| Outdoor operating temperature range | | Cooling | | | | 21~43 | | |
| | | Heating | | °C | | -5~21 | | |
| Clean filter | | Natural Enzyme Filter x 1 Photocatalytic Washable Deodorizing Filter x 1 | | | | | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

CONSTANT SPEED HEAT PUMP MODEL

SRK-HE

Wall Mounted type



* Not available in EU/EEA



SRK50HE-S1, SRK56HE-S1



Standard equipment




SRK63HE-S1, SRK71HE-S1



Standard equipment

Refrigerant pipe length



SRK50HE-S1 SRK63HE-S1
SRK56HE-S1 SRK71HE-S1



SRC50HE-S1, SRC56HE-S1,
SRC63HE-S1



SRC71HE-S1

FUNCTION



Comfortable Functions
Auto **HI POWER** **Start-Sput-3HOT Keep**

Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Indoor unit | | SRK50HE-S1 | SRK56HE-S1 | SRK63HE-S1 | SRK71HE-S1 |
|-------------------------------------|-------------------------|--------------------|--------------|--|--------------------------|
| Outdoor unit | | SRK50HE-S1 | SRK56HE-S1 | SRK63HE-S1 | SRK71HE-S1 |
| Power source | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 4.7 | 5.1 | 6.3 | 7.1 |
| Nominal heating capacity (Min~ Max) | kW | 5.3 | 5.8 | 6.7 | 7.5 |
| Power consumption | Cooling/Heating | 1.41 / 1.40 | 1.59 / 1.58 | 2.19 / 1.85 | 2.21 / 2.07 |
| EER/COP | Cooling/Heating | 3.33 / 3.79 | 3.21 / 3.67 | 2.88 / 3.62 | 3.21 / 3.62 |
| Inrush current | 220/230/240 V | A | 39.6 | 45.2 | 53 |
| * Sound power level | Indoor | Cooling/Heating | 58 / 61 | 59 / 61 | 59 / 60 |
| | Outdoor | Cooling/Heating | 63 / 64 | 64 / 65 | 65 / 65 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | 43 / 39 / 34 | 44 / 40 / 35 | 44 / 40 / 37 |
| | | Heating (Hi/Me/Lo) | 44 / 39 / 35 | 44 / 39 / 35 | 45 / 41 / 37 |
| | Outdoor | Cooling/Heating | 47 / 49 | 49 / 51 | 49 / 49 |
| Air flow | Indoor | Cooling (Hi/Me/Lo) | 10.0 | 11.0 | 18.0 |
| | | Heating (Hi/Me/Lo) | 12.5 | 12.5 | 20.5 |
| | Outdoor | Cooling/Heating | 38.0 / 38.0 | 38.0 / 38.0 | 42.0 / 42.0 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | mm | 298 x 840 x 259 | 318 x 1098 x 248 |
| | Outdoor | | | 640 x 850(+65) x 290 | 750 x 880(+88) x 340 |
| Net weight | Indoor / Outdoor | kg | 12 / 44 | 12 / 44 | 15 / 47 |
| Ref.piping size | Liquid/Gas | ø mm | | 6.35(1/4") / 12.7(1/2") | 6.35(1/4") / 15.88(5/8") |
| Refrigerant line (one way) length | | m | | Max. 25 | |
| Vertical height differences | Outdoor is higher/lower | m | | Max. 15 / Max. 15 | |
| Outdoor operating temperature range | Cooling | °C | | 21~43 | |
| | Heating | | | -5~21 | |
| Clean filter | | | | Natural Enzyme Filter x 1 Photocatalytic Washable Deodorizing Filter x 1 | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

SRF-ZJX

Floor Standing type



Standard equipment



SRC25ZJX-S, SRC35ZJX-S



SRC50ZJX-S



SRF25ZJX-S, SRF35ZJX-S, SRF50ZJX-S1



All SRF-ZJX series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.


The highest SEER/SCOP level in the industry

Our experience, research and development efforts with the floor standing series have realized the highest SEER/SCOP level in the industry. Indoor units are totally new design with optimum balance of air outlet direction and sufficient air flow volume.


FUNCTION



SEER in Cooling

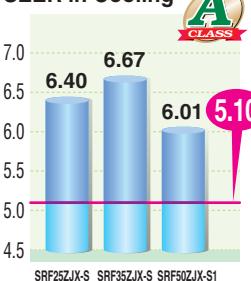

SCOP in Heating

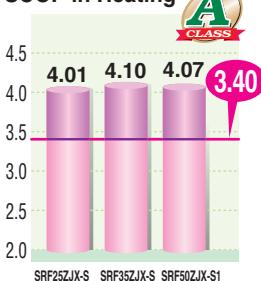

SPECIFICATIONS

| | | | SRF25ZJX-S SRC25ZJX-S | SRF35ZJX-S SRC35ZJX-S | SRF50ZJX-S1 SRC50ZJX-S |
|-------------------------------------|-------------------------|--------------------|--------------------------|--|---------------------------|
| Power source | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 2.5 (0.9~3.2) | 3.5 (0.9~4.1) | 5.0 (1.1~5.2) | |
| Nominal heating capacity (Min~Max) | kW | 3.4 (0.9~4.7) | 4.5 (0.9~5.1) | 6.0 (0.6~6.9) | |
| Power consumption | Cooling/Heating | 0.521 / 0.723 | 0.890 / 1.124 | 1.390 / 1.540 | |
| EER/COP | Cooling/Heating | 4.80 / 4.70 | 3.93 / 4.00 | 3.60 / 3.90 | |
| Inrush current | 220/230/240 V | | | | |
| Max. running current | | | | | |
| * Sound power level | Indoor | Cooling/Heating | 3.6 / 3.4 / 3.3 | 5.2 / 4.9 / 4.7 | 7.1 / 6.8 / 6.5 |
| | Outdoor | Cooling/Heating | 8 | 8 | 15 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | 51 / 51 | 52 / 52 | 58 / 58 |
| | Heating (Hi/Me/Lo) | 60 / 60 | 63 / 62 | 63 / 62 | |
| | Outdoor | Cooling/Heating | 40 / 32 / 26 | 41 / 34 / 28 | 46 / 42 / 32 |
| Air flow | Indoor | Cooling (Hi/Me/Lo) | 40 / 35 / 28 | 41 / 36 / 31 | 47 / 41 / 33 |
| | Heating (Hi/Me/Lo) | 47 / 47 | 50 / 50 | 52 / 51 | |
| | Outdoor | Cooling/Heating | 9.0 / 7.6 / 5.8 | 9.2 / 7.8 / 6.4 | 11.5 / 9.6 / 6.6 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | m³/min | 10.5 / 8.2 / 6.6 | 12.0 / 10.0 / 7.6 |
| | Outdoor | | mm | 29.5 / 27.0 | 36.0 / 33.0 |
| Net weight | Indoor / Outdoor | | | 600 x 860 x 238 | |
| Ref.piping size | Liquid/Gas | ø mm | | 595 x 780(+62) x 290 | 640 x 800(+71) x 290 |
| Refrigerant line (one way) length | | m | | 6.35(1/4") / 9.52(3/8") | |
| Vertical height differences | Outdoor is higher/lower | m | | Max. 15 | Max. 30 |
| Outdoor operating temperature range | Cooling | | | Max. 10 / Max. 10 | Max. 20 / Max. 20 |
| | Heating | °C | | -15~46 | |
| Clean filter | | | | -15~21 | |
| | | | | Natural Enzyme Filter x 1 Photocatalytic Washable Deodorizing Filter x 1 | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

Sophisticated Design

With classy semi flat front panel in chic white, the new series fit in various kinds of rooms and create relaxing atmosphere. Choice of wall hanging, floor standing or behind gallery installation is available.



Quiet Operation

Thanks to optimum balance of air outlet direction and sufficient air flow volume, the sound level has been minimized. The level of SRF25ZJX-S in the cooling lo mode is 26dB(A) only.

Auto air outlet selection

Heating operation:

In case both lower and upper outlets operation with Auto fan speed mode is selected, the lower outlet will be kept for twenty minutes after the start or until room temperature is close to reaching the setting point. And then the air outlet will change to both outlets. That state will be maintained until the switch is turned off.

Automatic adjustment of lower air outlet direction prevents stirring up of warm air and keeps optimum comfort at floor level.



Cooling operation:

In case both lower and upper outlets operation is selected in Cooling or Dry operation, both outlets will be kept for sixty minutes after the start or until room temperature is below the setting point. And then the air outlet will change to the upper outlet. That state will be maintained until switch is turned off.


In case both outlets operation with Auto fan speed mode is selected, the upper outlet will be kept for ten minutes after the start or until room temperature is close to reaching the setting point. And then the air outlet will change to both outlets in order to spread comfort air to every corner.



Flap control system


Selection of position is possible. A flap can be set at different angles.

*RCH-E3 is not applicable to the Flap control system.

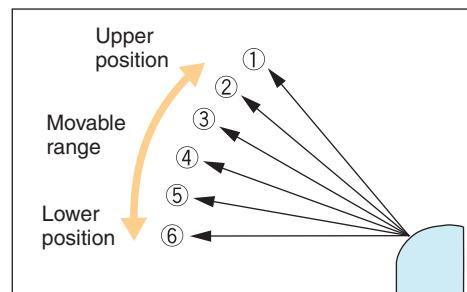


Installation workability

Piping and drain hose connection can be selected out of 6-directions.

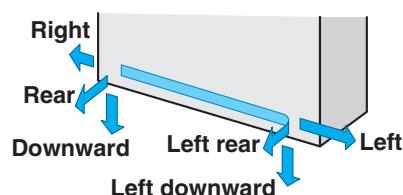

Convenient to use operation

Besides on/off operation, simultaneous lower and upper air outlets or upper outlet can be selected by air flow direction button. Further control can be arranged by a remote control.

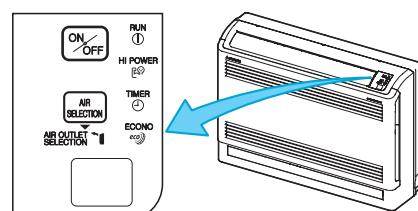

INVERTER HEAT PUMP MODEL

SRR-ZJ

Ceiling Concealed type



SRR25ZJ-S, SRR35ZJ-S



Standard equipment



SRR25/35ZJ can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.



SRC25ZJX-S, SRC35ZJX-S

Refrigerant pipe length



SRR25ZJ-S
SRR35ZJ-S

OPTIONAL PARTS FOR DUCTED TYPE



FUNCTION



SPECIFICATIONS

| | | | SRR25ZJ-S SRC25ZJX-S | SRR35ZJ-S SRC35ZJX-S |
|-------------------------------------|-------------------------|--------------------|---------------------------|-------------------------|
| Indoor unit | | | | |
| Outdoor unit | | | | |
| Power source | | | 1 Phase, 220 - 240V, 50Hz | |
| Nominal cooling capacity (Min~Max) | kW | | 2.5 (0.9~3.2) | 3.5 (0.9~4.1) |
| Nominal heating capacity (Min~Max) | kW | | 3.4 (0.9~4.7) | 4.2 (0.9~5.1) |
| Power consumption | Cooling/Heating | kW | 0.58 / 0.75 | 1.08 / 1.10 |
| EER/COP | Cooling/Heating | | 4.31 / 4.53 | 3.24 / 3.82 |
| Inrush current | 220/230/240 V | | 3.7 / 3.6 / 3.4 | 5.1 / 4.8 / 4.6 |
| Max. running current | | A | 9 | 9 |
| * Sound power level | Indoor | Cooling/Heating | 54 / 55 | 56 / 57 |
| | Outdoor | Cooling/Heating | 60 / 60 | 62 / 62 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | 40 / 35 / 29 | 42 / 37 / 30 |
| | Outdoor | Heating (Hi/Me/Lo) | 41 / 38 / 31 | 43 / 40 / 32 |
| | | Cooling/Heating | 47 / 47 | 50 / 50 |
| Air flow | Indoor | Cooling (Hi/Me/Lo) | 8.5 / 7.0 / 5.0 | 9.0 / 7.5 / 5.5 |
| | Indoor | Heating (Hi/Me/Lo) | 10.0 / 9.0 / 6.5 | 11.0 / 9.5 / 7.0 |
| | Outdoor | Cooling/Heating | 29.5 / 27.0 | 32.5 / 29.5 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | 230 x 740 x 455 | |
| | Outdoor | | 595 x 780(+62) x 290 | |
| Net weight | Indoor / Outdoor | kg | 22 / 38 | |
| Ref. piping size | Liquid/Gas | ø mm | 6.35(1/4") / 9.52(3/8") | |
| Refrigerant line (one way) length | | m | Max. 15 | |
| Vertical height differences | Outdoor is higher/lower | m | Max. 10 / Max.10 | |
| Outdoor operating temperature range | Cooling | °C | -15~46 | |
| | Heating | | -15~21 | |
| Clean filter | | | - | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

INVERTER HEAT PUMP MODEL

FDTC-VF

4way Ceiling Cassette type



Fits into standard
600 x 600 ceiling



FDTC25VF, FDTC35VF,
FDTC40VF, FDTC50VF,
FDTC60VF


Individual flap control system

According to room temperature conditions, four directions of air flow can be controlled by individual flap as preferred. As individual flap control is available even after installation, installation area became wider than before.




Flap control system

Selection of flap position is possible. Individual flaps can be set at different angles.



600mm Drain Pump is mounted

Drain can be discharged upward by 600mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.



All FDTC-VF series (except FDTC40VF) can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

Wired remote control (option)



Wireless remote control (option)




SRC25ZJX-S, SRC35ZJX-S




SRC40ZJX-S, SRC50ZJX-S,
SRC60ZJX-S

Refrigerant pipe length



FDTC25VF, FDTC35VF



FDTC40VF, FDTC50VF
FDTC60VF

FUNCTION

Comfortable Functions



Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| | Indoor unit | FDTC25VF SRC25ZJX-S | FDTC35VF SRC35ZJX-S | FDTC40VF SRC40ZJX-S | FDTC50VF SRC50ZJX-S | FDTC60VF SRC60ZJX-S |
|-------------------------------------|-------------------------|------------------------|-----------------------------------|-----------------------------------|------------------------|------------------------|
| Indoor unit | | | | | | |
| Outdoor unit | | | | | | |
| Power source | | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 2.55 (0.9 ~ 3.2) | 3.6 (0.9 ~ 4.1) | 4.0 (1.1 ~ 4.7) | 5.0 (1.1 ~ 5.6) | 5.6 (1.1 ~ 6.3) |
| Nominal heating capacity (Min~Max) | kW | 3.45 (0.9 ~ 4.7) | 4.25 (0.9 ~ 5.1) | 4.5 (0.6 ~ 5.4) | 5.4 (0.6 ~ 6.3) | 6.7 (0.6 ~ 6.7) |
| Power consumption | Cooling/Heating | kW | 0.6 / 0.84 | 1.07 / 1.16 | 1.04 / 1.10 | 1.56 / 1.45 |
| EER/COP | Cooling/Heating | | 4.25 / 4.11 | 3.36 / 3.66 | 3.85 / 4.09 | 3.21 / 3.72 |
| Inrush current | 220/230/240 V | A | 4.1 | 5.3 | 5.0 | 5.0 |
| Max. running current | | | 9 | 12 | 14 | 14 |
| * Sound power level | Indoor | Cooling/Heating | 50 | 54 | 60 | 60 |
| | Outdoor | Cooling/Heating | 60 | 62 | 63 | 64 |
| * Sound pressure level | Indoor | Cooling (Hi/Me/Lo) | 36 / 32 / 29 | 40 / 36 / 30 | 42 / 36 / 30 | 42 / 36 / 30 |
| | Outdoor | Heating (Hi/Me/Lo) | 38 / 33 / 29.5 | 42 / 35 / 32 | 42 / 36 / 32 | 46 / 39 / 32 |
| Air flow | Indoor | Cooling (Hi/Me/Lo) | 47 / 47 | 50 / 50 | 50 / 50 | 54 / 54 |
| | Heating (Hi/Me/Lo) | m³/min | 9 / 8 / 6.5 | 9.5 / 9 / 7 | 11.5 / 9 / 7 | 11.5 / 9 / 7 |
| | Outdoor | Cooling/Heating | 9.5 / 8.5 / 7 | 10 / 9 / 8 | 11.5 / 9 / 8 | 11.5 / 9 / 8 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | 29.5 / 27.0 | 32.5 / 29.5 | 36 / 33 | 40 / 33 |
| | Outdoor | mm | | | | |
| Net weight | Indoor / Outdoor | kg | 595 x 780(+62) x 290 | 640 x 800(+71) x 290 | | |
| Ref.piping size | Liquid/Gas | ø mm | 18.5 (Unit : 15 Panel : 3.5) / 38 | 18.5 (Unit : 15 Panel : 3.5) / 45 | | |
| Refrigerant line (one way) length | | m | 6.35(1/4") / 9.52(3/8") | 6.35(1/4") / 12.7(1/2") | | |
| Vertical height differences | Outdoor is higher/lower | m | Max. 15 | Max. 30 | | |
| Outdoor operating temperature range | Cooling | °C | Max. 10 / Max.10 | Max. 20 / Max.20 | | |
| | Heating | | -15~46 | -15~21 | | |
| Clean filter | | | | TC-PSA-25W-E | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.


* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

** Powerful-Hi can be selected. Sound level dB(A):25VF(Cooling:38 Heating:39), 35VF(Cooling:41 Heating:43), 40/50/60VF(Cooling:47 Heating:47), Airflow m³/min:25VF(Cooling:10 Heating:10.5), 35VF(Cooling:11 Heating:11.5), 40/50/60VF(Cooling:13.5 Heating:13.5)

Inverter Multi-split System



The multi-split system allows a single outdoor unit to service a range of configurations of up to six indoor unit ---- from a lineup of 8 units ranging from 6.0kW to 19.5kW.

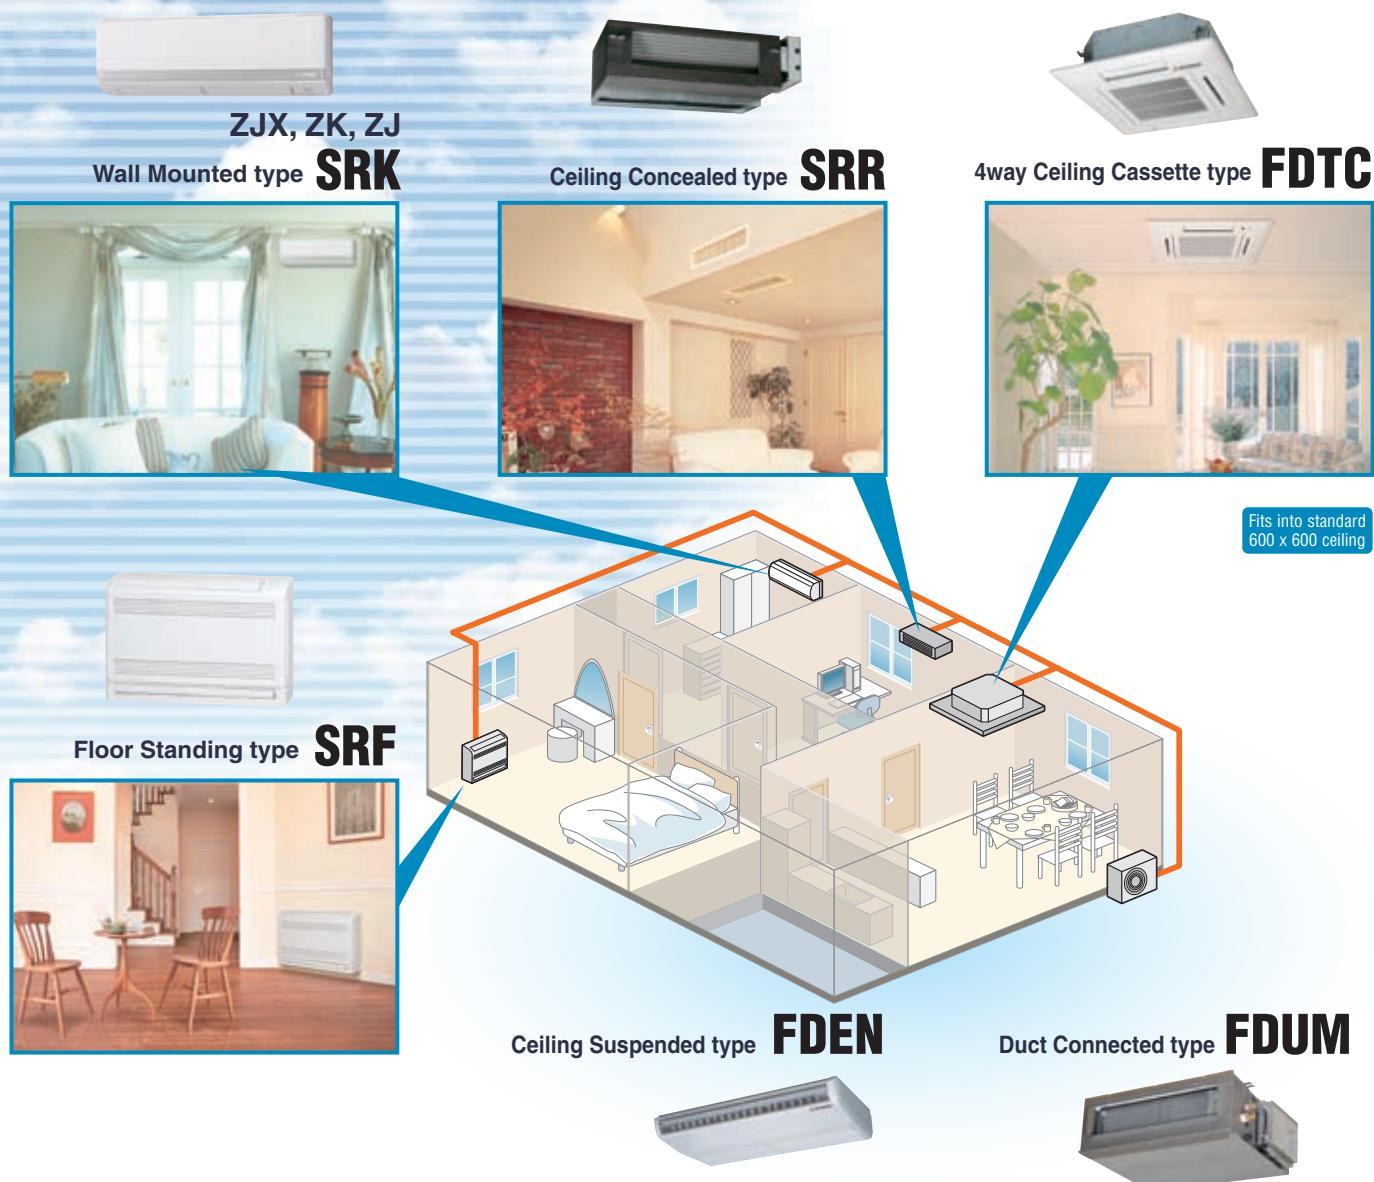

OUTDOOR UNIT



SCM40ZJ-S, SCM45ZJ-S
SCM50ZJ-S1, SCM60ZJ-S1



SCM71ZJ-S1, SCM80ZJ-S1



SCM100ZJ-S1, SCM125ZJ-S1


The industry's highest SEER/SCOP levels

Our new models, SCM40~125ZJ-S have achieved the highest level of SEER/SCOP in the industry with full model change to both of outdoor and indoor (SRK series) units.

Outdoor unit uses new advanced compressors with new inverter control (Vector control) and new M shape fin.

Indoor units SRK series are the latest series, which are common to both of single and multi system, using the new heat exchanger and improved air flow system.

SEER in Cooling

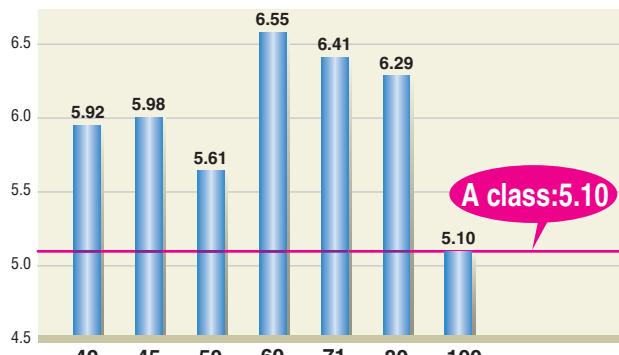

SCOP in Heating




The above values are based on indoor unit combination with SRK-ZJX-S/S1 only.

PIPING LENGTH

Limit The maximum piping length of the refrigerant pipes for the outdoor units, and the maximum height difference for the outdoor units are as shown below.

| | | SCM40/45ZJ-S | SCM50/60ZJ-S1 | SCM71/80ZJ-S1 | SCM100/125ZJ-S1 |
|---|--|--------------|---------------|---------------|-----------------|
| height difference | length for one indoor unit | under 25m | under 25m | under 25m | under 25m |
| | total length for all rooms | under 30m | under 40m | under 70m | under 90m |
| | lower installation spot of the indoor unit (A) | under 15m | under 15m | under 20m | under 20m |
| | upper installation spot of the indoor unit (B) | under 15m | under 15m | under 20m | under 20m |
| maximum height difference of the indoor units (C) | | under 25m | under 25m | under 25m | under 25m |
| length of precharged refrigerant pipe | | 30m | 40m | 40m | 50m |

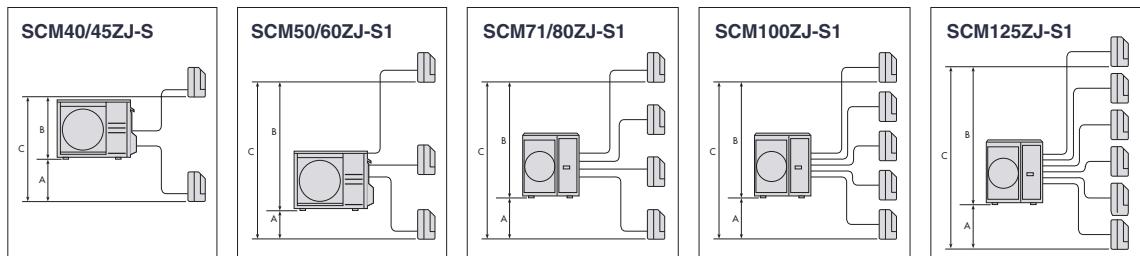

OUTDOOR UNIT SPECIFICATIONS

| Item | Model | For two rooms | | For three rooms | | For four rooms | | For five rooms | | For six rooms | | | |
|-------------------------------------|---------|--------------------------|-----------------|-----------------|-----------------|------------------|-------------------|--------------------|--------------------|------------------|--|--|--|
| | | SCM40ZJ-S | SCM45ZJ-S | SCM50ZJ-S1 | SCM60ZJ-S1 | SCM71ZJ-S1 | SCM80ZJ-S1 | SCM100ZJ-S1 | SCM125ZJ-S1 | | | | |
| Power Source | | 1Phase, 220 - 240V, 50Hz | | | | | | | | | | | |
| Nominal cooling capacity (Min~Max) | kW | 4.0(1.8~5.9) | 4.5(1.8~6.4) | 5.0(1.8~7.1) | 6.0(1.8~7.5) | 7.1(1.8~8.8) | 8.0(1.8~9.2) | 10.0(1.8~12.0) | 12.5(1.8~14.0) | | | | |
| Nominal heating capacity (Min~Max) | kW | 4.5(1.4~6.9) | 5.6(1.4~7.4) | 6.0(1.4~7.5) | 6.8(1.5~7.8) | 8.6(1.5~9.4) | 9.3(1.5~9.8) | 12.0(1.5~13.5) | 13.5(1.5~14.0) | | | | |
| Power Consumption | Cooling | 0.84(0.49~1.90) | 1.04(0.49~2.14) | 1.08(0.50~2.15) | 1.43(0.50~2.39) | 1.74(0.48~2.75) | 2.16(0.48~2.83) | 2.86(0.65~4.03) | 3.90(0.65~4.80) | | | | |
| | Heating | 0.90(0.47~2.30) | 1.20(0.47~2.57) | 1.31(0.48~2.58) | 1.51(0.60~3.00) | 2.00(0.60~3.35) | 2.26(0.26~3.43) | 2.93(0.70~3.40) | 3.25(0.70~3.42) | | | | |
| EER | Cooling | 4.76 | 4.33 | 4.63 | 4.2 | 4.08 | 3.70 | 3.50 | 3.21 | | | | |
| COP | Heating | 5.00 | 4.67 | 4.58 | 4.5 | 4.30 | 4.12 | 4.10 | 4.15 | | | | |
| Inrush current (Max) | A | 4.1/4.0/3.8(14) | 5.5/5.3/5.1(14) | 6.0/5.8/5.5(15) | 7.1/6.8/6.6(17) | 9.2/8.8/8.4(20) | 10.4/10.0/9.5(20) | 13.3/12.8/12.2(29) | 17.7/17.0/16.3(29) | | | | |
| Sound power level * | Cooling | dB(A) | 60 | 60 | 62 | 63 | 65 | 66 | 68 | 69 | | | |
| | Heating | dB(A) | 62 | 62 | 65 | 65 | 66 | 66 | 71 | 72 | | | |
| Sound pressure level * | Cooling | dB(A) | 47 | 47 | 49 | 50 | 52 | 54 | 56 | 57 | | | |
| | Heating | dB(A) | 48 | 49 | 52 | 52 | 54 | 54 | 59 | 60 | | | |
| Air flow | Cooling | m³/min | 40.0 | 40.0 | 41.0 | 42.0 | 56.0 | 56.0 | 75.0 | 75.0 | | | |
| | Heating | | 40.0 | 40.0 | 41.0 | 42.0 | 56.0 | 56.0 | 75.0 | 82.0 | | | |
| Exterior dimensions (H×W×D) | mm | 640×850(+65)×290 | | | | 750×880(+73)×340 | | | | 945×970(+73)×370 | | | |
| Net weight | kg | 47 | 47 | 48 | 49 | 62 | | | 92 | | | | |
| Outdoor operating temperature range | °C | -15~43 -15~24 | | | | | | | | | | | |
| Total indoor units capacity | kW | 6.0 | 7.0 | 8.5 | 11.0 | 12.5 | 13.5 | 16.0 | 19.5 | | | | |

The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Multi System INDOOR UNIT



SRK-ZJX

Wall Mounted type



FUNCTION



Comfortable Air Flow Functions



Convenient & Economy Functions



Standard equipment

Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Item | Model | SRK20ZJX-S | SRK25ZJX-S | SRK35ZJX-S | SRK50ZJX-S1 | SRK60ZJX-S2 |
|-----------------------------|-------------------|------------|---|-------------------|-------------------------|--------------------|
| Nominal cooling capacity | kW | 2.0 | 2.5 | 3.5 | 5.0 | 6.0 |
| Nominal heating capacity | kW | 3.0 | 3.4 | 4.5 | 5.8 | 6.8 |
| * Sound power level | Cooling | dB(A) | 53 | 55 | 58 | 60 |
| | Heating | dB(A) | 54 | 58 | 59 | 64 |
| * Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 39 / 30 / 21 | 41 / 31 / 22 | 43 / 33 / 22 | 47 / 40 / 27 |
| | Heating(Hi/Me/Lo) | dB(A) | 38 / 33 / 25 | 41 / 34 / 27 | 42 / 35 / 27 | 48 / 40 / 33 |
| Air flow | Cooling(Hi/Me/Lo) | m³/min | 11.5 / 8.0 / 5.0 | 12.5 / 9.0 / 5.0 | 13.5 / 9.5 / 5.0 | 13.5 / 11.0 / 8.0 |
| | Heating(Hi/Me/Lo) | | 12.0 / 9.5 / 7.5 | 13.0 / 10.0 / 7.5 | 14.0 / 11.0 / 8.0 | 17.0 / 14.5 / 10.5 |
| Exterior dimensions (H×W×D) | mm | | 309×890×220 | | | |
| Net weight | kg | | 15 | | | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35 (1/4") / 9.52 (3/8") | | 6.35(1/4") / 12.7(1/2") | |
| Clean filter | | | Allergen Clear Filter × 1, Photocatalytic Washable Deodorizing Filter × 1 | | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.



SRK-ZK

Wall Mounted type



FUNCTION



Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Item | Model | SRK71ZK-S |
|-----------------------------|-----------------------|---|
| Nominal cooling capacity | kW | 7.1 |
| Nominal heating capacity | kW | 8.0 |
| * Sound power level | Cooling | dB(A) |
| | Heating | dB(A) |
| * Sound pressure level | Cooling(Hi/Me/Lo/Ulo) | dB(A) |
| | Heating(Hi/Me/Lo/Ulo) | dB(A) |
| Air flow | Cooling(Hi/Me/Lo/Ulo) | m³/min |
| | Heating(Hi/Me/Lo/Ulo) | |
| Exterior dimensions (H×W×D) | mm | 318×1098×248 |
| Net weight | kg | 15 |
| Ref. piping size | Liquid / Gas | φ mm |
| Clean filter | | Allergen Clear Filter × 1, Photocatalytic Washable Deodorizing Filter × 1 |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

Premium Series

SRK-ZJ

Wall Mounted type

FUNCTION



Comfortable Functions
Fuzzy Auto HI POWER

Comfortable Air Flow Functions



Convenient & Economy Functions



Standard equipment

Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Item | Model | SRK20ZJ-S | SRK25ZJ-S | SRK35ZJ-S | SRK50ZJ-S |
|-----------------------------|-------------------|-----------|---|-------------------------|------------------|
| Nominal cooling capacity | kW | 2.0 | 2.5 | 3.5 | 5.0 |
| Nominal heating capacity | kW | 3.0 | 3.4 | 4.5 | 5.8 |
| *Sound power level | Cooling | dB(A) | 49 | 50 | 58 |
| | Heating | dB(A) | 52 | 55 | 61 |
| *Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 33 / 27 / 21 | 34 / 28 / 21 | 42 / 32 / 22 |
| | Heating(Hi/Me/Lo) | dB(A) | 36 / 31 / 24 | 39 / 31 / 24 | 43 / 37 / 25 |
| Air flow | Cooling(Hi/Me/Lo) | m³/min | 7.8 / 5.6 / 4.8 | 7.9 / 6.0 / 5.0 | 10.1 / 6.4 / 5.0 |
| | Heating(Hi/Me/Lo) | m³/min | 9.8 / 6.3 / 5.0 | 10.6 / 6.5 / 5.1 | 12.8 / 9.4 / 6.1 |
| Exterior dimensions (H×W×D) | mm | | 294×798×229 | | |
| Net weight | kg | | 9.5 | | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35(1/4") / 9.52(3/8") | 6.35(1/4") / 12.7(1/2") | |
| Clean filter | | | Allergen Clear Filter × 1, Photocatalytic Washable Deodorizing Filter × 1 | | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

SRF-ZJX

Floor-Standing type

FUNCTION



Comfortable Functions
Fuzzy Auto HI POWER

Comfortable Air Flow Functions
Auto Flap, Memory, UP/DOWN, Air outlet selection

Standard equipment



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Item | Model | SRF25ZJX-S | SRF35ZJX-S | SRF50ZJX-S1 |
|-----------------------------|-------------------|------------|---------------------------|--|
| Nominal cooling capacity | kW | 2.5 | 3.5 | 5.0 |
| Nominal heating capacity | kW | 3.4 | 4.5 | 5.8 |
| *Sound power level | Cooling | dB(A) | 51 | 52 |
| | Heating | dB(A) | 51 | 52 |
| *Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 40 / 32 / 26 | 41 / 34 / 28 |
| | Heating(Hi/Me/Lo) | dB(A) | 40 / 35 / 28 | 41 / 36 / 31 |
| Air flow | Cooling(Hi/Me/Lo) | m³/min | 9.0 / 7.6 / 5.8 | 9.2 / 7.8 / 6.4 |
| | Heating(Hi/Me/Lo) | m³/min | 10.5 / 8.2 / 6.6 | 10.7 / 8.3 / 7.4 |
| Exterior dimensions (H×W×D) | mm | | 600×860×238 | |
| Net weight | kg | 18 | 19 | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35(1/4") / 9.52(3/8") | 6.35(1/4") / 12.7(1/2") |
| Clean filter | | | Natural Enzyme Filter × 1 | Photocatalytic Washable Deodorizing Filter × 1 |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

INVERTER MULTI-SPLIT SYSTEM

SRR-ZJ

Ceiling Concealed type




Standard equipment

FUNCTION



OPTIONAL PARTS FOR DUCTED TYPE



SPECIFICATIONS

| Item | Model | SRR25ZJ-S | SRR35ZJ-S | SRR50ZJ-S | SRR60ZJ-S1 |
|----------------------------|-------------------|-----------|-------------------------|------------------|-------------------------|
| Nominal cooling capacity | kW | 2.5 | 3.5 | 5.0 | 6.0 |
| Nominal heating capacity | kW | 3.4 | 4.5 | 5.8 | 6.8 |
| * Sound power level | Cooling | dB(A) | 54 | 56 | 60 |
| | Heating | dB(A) | 55 | 57 | 60 |
| * Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 40 / 35 / 29 | 42 / 37 / 30 | 48 / 42 / 33 |
| | Heating(Hi/Me/Lo) | dB(A) | 41 / 38 / 31 | 43 / 40 / 32 | 48 / 45 / 36 |
| Air flow | Cooling(Hi/Me/Lo) | m³/min | 8.5 / 7.0 / 5.0 | 9.0 / 7.5 / 5.5 | 10.5 / 8.0 / 5.0 |
| | Heating(Hi/Me/Lo) | m³/min | 10.0 / 9.0 / 6.5 | 11.0 / 9.5 / 7.0 | 13.0 / 11.5 / 7.5 |
| Exterior dimensions(H×W×D) | mm | | 230×740×455 | | |
| Net weight | kg | 22 | | 23 | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35(1/4") / 9.52(3/8") | | 6.35(1/4") / 12.7(1/2") |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.



FDT-C-VF

4way Ceiling Cassette type

Fits into standard
600 x 600 ceiling



FUNCTION



SPECIFICATIONS

| Item | Model | FDT25VF | FDT35VF | FDT50VF | FDT60VF |
|--------------------------------|-------------------|---------|-------------------------|-------------------------|------------------|
| Nominal cooling capacity | kW | 2.5 | 3.5 | 5.0 | 6.0 |
| Nominal heating capacity | kW | 3.4 | 4.5 | 5.8 | 6.8 |
| * Sound power level | Cooling | dB(A) | 50 | 54 | 60 |
| | Heating | dB(A) | 60 | 62 | 64 |
| * Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 36 / 32 / 29 | 40 / 36 / 30 | 42 / 36 / 30 |
| | Heating(Hi/Me/Lo) | dB(A) | 38 / 33 / 29.5 | 42 / 35 / 32 | 46 / 39 / 32 |
| Air flow | Cooling(Hi/Me/Lo) | m³/min | 9.0 / 8.0 / 6.5 | 9.5 / 9.0 / 7.0 | 11.5 / 9.0 / 7.0 |
| | Heating(Hi/Me/Lo) | m³/min | 9.5 / 8.5 / 7.0 | 10.0 / 9.0 / 8.0 | 11.5 / 9.0 / 8.0 |
| Exterior dimensions (H×W×D) | Main unit | mm | 248×570×570 | | |
| | Panel | mm | 35×700×700 | | |
| Net weight | Unit | kg | 15 | | |
| | Panel | kg | 3.5 | | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35(1/4") / 9.52(3/8") | 6.35(1/4") / 12.7(1/2") | |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

* Powerful-Hi can be selected. Sound level dB(A):25VF(Cooling:38 Heating:39), 35VF(Cooling:41 Heating:43), 40/50/60VF(Cooling:47 Heating:47), Air flow m³/min:25VF(Cooling:10 Heating:10.5), 35VF(Cooling:11 Heating:11.5), 50/60VF(Cooling:13.5 Heating:13.5)

FDUM-VF

Duct Connected-Low/Middle Static Pressure-



Wired remote control (option) Wireless remote control (option)



RC-EX1A



RC-E5



RCH-E3



RCN-KIT3-E



Filter KIT
UM-FL1EF (option)

FUNCTION

Comfortable Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Item | Model | FDUM50VF | |
|-----------------------------|-------------------|---------------------|--------------------------------|
| Nominal cooling capacity | kW | 5.0 | |
| Nominal heating capacity | kW | 5.8 | |
| * Sound power level | Cooling | dB(A) | 60 |
| | Heating | dB(A) | 60 |
| * Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 32 / 29 / 26 |
| | Heating(Hi/Me/Lo) | dB(A) | 32 / 29 / 26 |
| Air flow | Cooling(Hi/Me/Lo) | m ³ /min | 10.0 / 9.0 / 8.0 |
| | Heating(Hi/Me/Lo) | | 10.0 / 9.0 / 8.0 |
| Exterior dimensions (H×W×D) | mm | 280×750×635 | |
| Net weight | kg | 29 | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35(1/4") / 12.7(1/2") |
| Air filter | | | Filter KIT : UM-FL1EF (option) |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level dB(A):Cooling:37 Heating:37, Air flow:13m³/min

FDEN-VF

Ceiling Suspended



Wired remote control (option) Wireless remote control (option)



RC-EX1A



RC-E5



RCH-E3



RCN-E-E

FUNCTION

Comfortable Functions



Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

| Item | Model | FDEN50VF | |
|-----------------------------|-------------------|---------------------|-----------------------------------|
| Nominal cooling capacity | kW | 5.0 | |
| Nominal heating capacity | kW | 5.8 | |
| * Sound power level | Cooling | dB(A) | 60 |
| | Heating | dB(A) | 60 |
| * Sound pressure level | Cooling(Hi/Me/Lo) | dB(A) | 39 / 38 / 37 |
| | Heating(Hi/Me/Lo) | dB(A) | 39 / 38 / 37 |
| Air flow | Cooling(Hi/Me/Lo) | m ³ /min | 11.0 / 9.0 / 7.0 |
| | Heating(Hi/Me/Lo) | | 11.0 / 9.0 / 7.0 |
| Exterior dimensions (H×W×D) | mm | 210×1070×690 | |
| Net weight | kg | 28 | |
| Ref. piping size | Liquid / Gas | φ mm | 6.35(1/4") / 12.7(1/2") |
| Air filter | | | Pocket Plastic net × 2 (Washable) |

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: Cooling dB(A):46 Heating:46, Air flow:13m³/min

INVERTER MULTI-SPLIT SYSTEM

Combinations

Combination table for Outdoor unit and Indoor unit

●:Yes -:No

| Indoor | Outdoor | SCM40ZJ-S | SCM45ZJ-S | SCM50ZJ-S1 | SCM60ZJ-S1 | SCM71ZJ-S1 | SCM80ZJ-S1 | SCM100ZJ-S1 | SCM125ZJ-S1 |
|--------|----------|-----------|-----------|------------|------------|------------|------------|-------------|-------------|
| SRK | 20ZJX-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 25ZJX-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 35ZJX-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 50ZJX-S1 | — | — | ● | ● | ● | ● | ● | ● |
| | 60ZJX-S2 | — | — | — | ● | ● | ● | ● | ● |
| | 71ZK-S | — | — | — | — | — | — | ● | ● |
| | 20ZJ-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 25ZJ-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 35ZJ-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 50ZJ-S | — | — | ● | ● | ● | ● | ● | ● |
| SRR | 25ZJ-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 35ZJ-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 50ZJ-S | — | — | ● | ● | ● | ● | ● | ● |
| | 60ZJ-S1 | — | — | — | ● | ● | ● | ● | ● |
| SRF | 25ZJX-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 35ZJX-S | ● | ● | ● | ● | ● | ● | ● | ● |
| | 50ZJX-S1 | — | — | ● | ● | ● | ● | ● | ● |
| FDTC | 25VF | ● | ● | ● | ● | ● | ● | ● | ● |
| | 35VF | ● | ● | ● | ● | ● | ● | ● | ● |
| | 50VF | — | — | ● | ● | ● | ● | ● | ● |
| | 60VF | — | — | — | ● | ● | ● | ● | ● |
| FDUM | 50VF | — | — | ● | ● | ● | ● | ● | ● |
| FDEN | 50VF | — | — | ● | ● | ● | ● | ● | ● |

Number of connectable Indoor units

| | SCM40ZJ-S | SCM45ZJ-S | SCM50ZJ-S1 | SCM60ZJ-S1 | SCM71ZJ-S1 | SCM80ZJ-S1 | SCM100ZJ-S1 | SCM125ZJ-S1 |
|-----|-----------|-----------|------------|------------|------------|------------|-------------|-------------|
| Min | 2 | 2 | 2 | 2 | 2 | 2 | 4* | 4* |
| Max | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 6 |

* In case of SRK71ZK-S+SRK71ZK-S, 2 Indoor units can be connectable.

In case of the combination with SRK20ZJX-S, SRK25ZJX-S, SRK35ZJX-S, SRK50ZJX-S1, SRK60ZJX-S2, SRK71ZK-S & FDEN50VF, any 3 indoor units can be connectable. The total connecting capacity of indoor units should be between 100 ~ 160.

Connectable total indoor units capacity

| | SCM40ZJ-S | SCM45ZJ-S | SCM50ZJ-S1 | SCM60ZJ-S1 | SCM71ZJ-S1 | SCM80ZJ-S1 | SCM100ZJ-S1 | SCM125ZJ-S1 |
|----|-----------|-----------|------------|------------|------------|------------|-------------|-------------|
| kW | 6.0 | 7.0 | 8.5 | 11.0 | 12.5 | 13.5 | 16.0 | 19.5 |

SCM40ZJ-S Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Heating operation | Indoor unit combination | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------|-------------------------|----------------------------|--------|---------------------|----------|------|-----|-----------------------|----------|------|----------------------|------|------|
| | | Room heating capacity (kW) | | Total capacity (kW) | | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| *1 1 room | 20 | 3.0 | — | 1.4 | 3.0 | 3.7 | 470 | 750 | 1070 | 3.4 | 3.3 | 3.2 | |
| | 25 | 3.4 | — | 1.4 | 3.4 | 4.2 | 470 | 920 | 1210 | 4.2 | 4.0 | 3.9 | |
| | 35 | 4.5 | — | 1.4 | 4.5 | 5.0 | 470 | 1210 | 1450 | 5.6 | 5.3 | 5.1 | |
| | 20 + 20 | 2.25 | 2.25 | 2.0 | 4.5 | 6.9 | 530 | 900 | 2300 | 4.1 | 4.0 | 3.8 | |
| *2 2 room | 20 + 25 | 2.49 | 3.11 | 2.0 | 5.6 | 6.9 | 530 | 1200 | 2300 | 5.5 | 5.3 | 5.1 | |
| | 20 + 35 | 2.11 | 3.69 | 2.0 | 5.8 | 6.9 | 530 | 1290 | 2300 | 5.9 | 5.7 | 5.4 | |
| | 25 + 25 | 2.90 | 2.90 | 2.0 | 5.8 | 6.9 | 530 | 1290 | 2300 | 5.9 | 5.7 | 5.4 | |
| | 25 + 35 | 2.42 | 3.38 | 2.0 | 5.8 | 6.9 | 530 | 1290 | 2300 | 5.9 | 5.7 | 5.4 | |

The values are for 1 indoor unit (*1) and 2 indoor units (*2) operation.

The same hereinafter.

| Cooling operation | Indoor unit combination | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------|-------------------------|----------------------------|--------|---------------------|----------|------|-----|-----------------------|----------|------|----------------------|------|------|
| | | Room cooling capacity (kW) | | Total capacity (kW) | | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| 1 room | 20 | 2.0 | — | 1.8 | 2.0 | 2.8 | 490 | 530 | 880 | 2.4 | 2.3 | 2.2 | |
| | 25 | 2.5 | — | 1.8 | 2.5 | 3.4 | 490 | 670 | 1040 | 3.1 | 2.9 | 2.8 | |
| | 35 | 3.5 | — | 1.8 | 3.5 | 3.9 | 490 | 970 | 1200 | 4.5 | 4.3 | 4.1 | |
| | 20 + 20 | 2.00 | 2.00 | 3.0 | 4.0 | 5.7 | 560 | 840 | 1750 | 3.9 | 3.7 | 3.5 | |
| 2 room | 20 + 25 | 2.00 | 2.50 | 3.0 | 4.5 | 5.9 | 560 | 1040 | 1900 | 4.8 | 4.6 | 4.4 | |
| | 20 + 35 | 1.89 | 3.31 | 3.0 | 5.2 | 5.9 | 560 | 1430 | 1900 | 6.6 | 6.3 | 6.0 | |
| | 25 + 25 | 2.50 | 2.50 | 3.0 | 5.0 | 5.9 | 560 | 1280 | 1900 | 5.9 | 5.6 | 5.4 | |
| | 25 + 35 | 2.17 | 3.03 | 3.0 | 5.2 | 5.9 | 560 | 1430 | 1900 | 6.6 | 6.3 | 6.0 | |

SCM40ZJ-S Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Heating operation | Indoor unit combination | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------|-------------------------|----------------------------|--------|---------------------|----------|------|-----|-----------------------|----------|------|----------------------|------|------|
| | | Room heating capacity (kW) | | Total capacity (kW) | | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| 1 room | 20 | 3.0 | — | 1.4 | 3.0 | 3.5 | 470 | 900 | 1070 | 4.1 | 4.0 | 3.8 | |
| | 25 | 3.4 | — | 1.4 | 3.4 | 4.0 | 470 | 1070 | 1210 | 4.9 | 4.7 | 4.5 | |
| | 35 | 4.5 | — | 1.4 | 4.5 | 4.8 | 470 | 1340 | 1450 | 6.2 | 5.9 | 5.6 | |
| | 20 + 20 | 2.25 | 2.25 | 2.0 | 4.5 | 6.7 | 530 | 930 | 2300 | 4.3 | 4.1 | 3.9 | |
| 2 room | 20 + 25 | 2.49 | 3.11 | 2.0 | 5.6 | 6.7 | 530 | 1240 | 2300 | 5.7 | 5.4 | 5.2 | |
| | 20 + 35 | 2.11 | 3.69 | 2.0 | 5.8 | 6.7 | 530 | 1330 | 2300 | 6.1 | 5.8 | 5.6 | |
| | 25 + 25 | 2.90 | 2.90 | 2.0 | 5.8 | 6.7 | 530 | 1330 | 2300 | 6.1 | 5.8 | 5.6 | |
| | 25 + 35 | 2.42 | 3.38 | 2.0 | 5.8 | 6.7 | 530 | 1330 | 2300 | 6.1 | 5.8 | 5.6 | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|--------|----------------------------|--------|---------------------|----------|------|------|-----------------------|------|------|----------------------|------|-----|
| | | Room cooling capacity (kW) | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 1 room | 20 | 2.0 | — | 1.8 | 2.0 | 2.7 | 490 | 560 | 880 | 2.6 | 2.5 | 2.4 |
| | | 25 | 2.5 | — | 1.8 | 2.5 | 3.2 | 490 | 710 | 1040 | 3.3 | 3.1 | 3.0 |
| | | 35 | 3.5 | — | 1.8 | 3.5 | 3.7 | 490 | 1030 | 1200 | 4.7 | 4.5 | 4.3 |
| | 2 room | 20 + 20 | 2.00 | 2.00 | 3.0 | 4.0 | 5.6 | 560 | 880 | 1750 | 4.0 | 3.9 | 3.7 |
| | | 20 + 25 | 2.00 | 2.50 | 3.0 | 4.5 | 5.8 | 560 | 1090 | 1900 | 5.0 | 4.8 | 4.6 |
| | | 20 + 35 | 1.89 | 3.31 | 3.0 | 5.2 | 5.8 | 560 | 1500 | 1900 | 6.9 | 6.6 | 6.3 |
| | | 25 + 25 | 2.50 | 2.50 | 3.0 | 5.0 | 5.8 | 560 | 1340 | 1900 | 6.2 | 5.9 | 5.6 |
| | | 25 + 35 | 2.17 | 3.03 | 3.0 | 5.2 | 5.8 | 560 | 1500 | 1900 | 6.9 | 6.6 | 6.3 |

SCM45ZJ-S Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|--------|----------------------------|--------|---------------------|----------|------|------|-----------------------|------|------|----------------------|------|-----|
| | | Room heating capacity (kW) | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 1 room | 20 | 3.0 | — | 1.4 | 3.0 | 3.7 | 470 | 750 | 1070 | 3.4 | 3.3 | 3.2 |
| | | 25 | 3.4 | — | 1.4 | 3.4 | 4.2 | 470 | 920 | 1210 | 4.2 | 4.0 | 3.9 |
| | | 35 | 4.5 | — | 1.4 | 4.5 | 5.0 | 470 | 1210 | 1450 | 5.6 | 5.3 | 5.1 |
| | 2 room | 20 + 20 | 2.25 | 2.25 | 2.0 | 4.5 | 7.4 | 530 | 900 | 2570 | 4.1 | 4.0 | 3.8 |
| | | 20 + 25 | 2.49 | 3.11 | 2.0 | 5.6 | 7.4 | 530 | 1200 | 2570 | 5.5 | 5.3 | 5.1 |
| | | 20 + 35 | 2.36 | 4.14 | 2.0 | 6.5 | 7.4 | 530 | 1500 | 2570 | 6.9 | 6.6 | 6.3 |
| | | 25 + 25 | 3.25 | 3.25 | 2.0 | 6.5 | 7.4 | 530 | 1500 | 2570 | 6.9 | 6.6 | 6.3 |
| | | 25 + 35 | 2.71 | 3.79 | 2.0 | 6.5 | 7.4 | 530 | 1500 | 2570 | 6.9 | 6.6 | 6.3 |
| | | 35 + 35 | 3.25 | 3.25 | 2.0 | 6.5 | 7.4 | 530 | 1500 | 2570 | 6.9 | 6.6 | 6.3 |

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|--------|----------------------------|--------|---------------------|----------|------|------|-----------------------|------|------|----------------------|------|-----|
| | | Room cooling capacity (kW) | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 1 room | 20 | 2.0 | — | 1.8 | 2.0 | 2.8 | 490 | 530 | 880 | 2.4 | 2.3 | 2.2 |
| | | 25 | 2.5 | — | 1.8 | 2.5 | 3.4 | 490 | 670 | 1040 | 3.1 | 2.9 | 2.8 |
| | | 35 | 3.5 | — | 1.8 | 3.5 | 3.9 | 490 | 970 | 1200 | 4.5 | 4.3 | 4.1 |
| | 2 room | 20 + 20 | 2.00 | 2.00 | 3.0 | 4.0 | 5.7 | 560 | 840 | 1750 | 3.9 | 3.7 | 3.5 |
| | | 20 + 25 | 2.00 | 2.50 | 3.0 | 4.5 | 5.9 | 560 | 1040 | 1900 | 4.8 | 4.6 | 4.4 |
| | | 20 + 35 | 2.00 | 3.50 | 3.0 | 5.5 | 6.3 | 560 | 1490 | 2110 | 6.8 | 6.5 | 6.3 |
| | | 25 + 25 | 2.50 | 2.50 | 3.0 | 5.0 | 6.2 | 560 | 1280 | 2050 | 5.9 | 5.6 | 5.4 |
| | | 25 + 35 | 2.42 | 3.38 | 3.0 | 5.8 | 6.4 | 560 | 1550 | 2570 | 7.1 | 6.8 | 6.5 |
| | | 35 + 35 | 2.90 | 2.90 | 3.0 | 5.8 | 6.4 | 560 | 1740 | 2140 | 8.0 | 7.6 | 7.3 |

SCM45ZJ-S Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|--------|----------------------------|--------|---------------------|----------|------|------|-----------------------|------|------|----------------------|------|-----|
| | | Room heating capacity (kW) | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 1 room | 20 | 3.0 | — | 1.4 | 3.0 | 3.5 | 470 | 900 | 1070 | 4.1 | 4.0 | 3.8 |
| | | 25 | 3.4 | — | 1.4 | 3.4 | 4.0 | 470 | 1070 | 1210 | 4.9 | 4.7 | 4.5 |
| | | 35 | 4.5 | — | 1.4 | 4.5 | 4.8 | 470 | 1340 | 1450 | 6.2 | 5.9 | 5.6 |
| | 2 room | 20 + 20 | 2.25 | 2.25 | 2.0 | 4.5 | 7.2 | 530 | 930 | 2570 | 4.3 | 4.1 | 3.9 |
| | | 20 + 25 | 2.49 | 3.11 | 2.0 | 5.6 | 7.2 | 530 | 1240 | 2570 | 5.7 | 5.4 | 5.2 |
| | | 20 + 35 | 2.36 | 4.14 | 2.0 | 6.5 | 7.2 | 530 | 1550 | 2570 | 7.1 | 6.8 | 6.5 |
| | | 25 + 25 | 3.25 | 3.25 | 2.0 | 6.5 | 7.2 | 530 | 1550 | 2570 | 7.1 | 6.8 | 6.5 |
| | | 25 + 35 | 2.71 | 3.79 | 2.0 | 6.5 | 7.2 | 530 | 1550 | 2570 | 7.1 | 6.8 | 6.5 |
| | | 35 + 35 | 3.25 | 3.25 | 2.0 | 6.5 | 7.2 | 530 | 1550 | 2570 | 7.1 | 6.8 | 6.5 |

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|--------|----------------------------|--------|---------------------|----------|------|------|-----------------------|------|------|----------------------|------|-----|
| | | Room cooling capacity (kW) | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 1 room | 20 | 2.0 | — | 1.8 | 2.0 | 2.7 | 490 | 560 | 880 | 2.6 | 2.5 | 2.4 |
| | | 25 | 2.5 | — | 1.8 | 2.5 | 3.2 | 490 | 710 | 1040 | 3.3 | 3.1 | 3.0 |
| | | 35 | 3.5 | — | 1.8 | 3.5 | 3.7 | 490 | 1030 | 1200 | 4.7 | 4.5 | 4.3 |
| | 2 room | 20 + 20 | 2.00 | 2.00 | 3.0 | 4.0 | 5.6 | 560 | 880 | 1750 | 4.0 | 3.9 | 3.7 |
| | | 20 + 25 | 2.00 | 2.50 | 3.0 | 4.5 | 5.8 | 560 | 1090 | 1900 | 5.0 | 4.8 | 4.6 |
| | | 20 + 35 | 2.00 | 3.50 | 3.0 | 5.5 | 6.2 | 560 | 1560 | 2110 | 7.2 | 6.9 | 6.6 |
| | | 25 + 25 | 2.50 | 2.50 | 3.0 | 5.0 | 6.1 | 560 | 1340 | 2050 | 6.2 | 5.9 | 5.6 |
| | | 25 + 35 | 2.42 | 3.38 | 3.0 | 5.8 | 6.3 | 560 | 1820 | 2140 | 8.4 | 8.0 | 7.7 |
| | | 35 + 35 | 2.90 | 2.90 | 3.0 | 5.8 | 6.3 | 560 | 1820 | 2140 | 8.4 | 8.0 | 7.7 |

SCM50ZJ-S1 Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|--------|----------------------------|--------|---------------------|----------|------|------|-----------------------|------|------|----------------------|------|-----|
| | | Room heating capacity (kW) | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 1 room | 20 | 3.0 | — | 1.4 | 3.0 | 3.7 | 480 | 820 | 1100 | 3.8 | 3.6 | 3.5 |
| | | | | | | | | | | | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|--------|--------|---------------------|----------|------|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room heating capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 3 room | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 3.0 | 6.0 | 7.5 | 600 | 1310 | 2580 | 6.0 | 5.8 | 5.5 |
| | | 20 + 20 + 25 | 1.91 | 1.91 | 2.38 | 3.0 | 6.2 | 7.5 | 600 | 1400 | 2580 | 6.4 | 6.1 | 5.9 |
| | | 20 + 20 + 35 | 1.76 | 1.76 | 3.08 | 3.0 | 6.6 | 7.5 | 600 | 1560 | 2580 | 7.2 | 6.9 | 6.6 |
| | | 20 + 25 + 25 | 1.83 | 2.29 | 2.29 | 3.0 | 6.4 | 7.5 | 600 | 1470 | 2580 | 6.7 | 6.5 | 6.2 |
| | | 20 + 25 + 35 | 1.70 | 2.13 | 2.98 | 3.0 | 6.8 | 7.5 | 600 | 1620 | 2580 | 7.4 | 7.1 | 6.8 |
| | | 25 + 25 + 25 | 2.20 | 2.20 | 2.20 | 3.0 | 6.6 | 7.5 | 600 | 1560 | 2580 | 7.2 | 6.9 | 6.6 |
| | | 25 + 25 + 35 | 2.06 | 2.06 | 2.88 | 3.0 | 7.0 | 7.5 | 600 | 1690 | 2580 | 7.8 | 7.4 | 7.1 |

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|--------|--------|---------------------|----------|------|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room Cooling capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 1 room | 20 | 2.0 | — | — | 1.8 | 2.0 | 2.8 | 500 | 550 | 900 | 2.5 | 2.4 | 2.3 |
| | | 25 | 2.5 | — | — | 1.8 | 2.5 | 3.4 | 500 | 720 | 1070 | 3.3 | 3.2 | 3.0 |
| | | 35 | 3.5 | — | — | 1.8 | 3.5 | 3.9 | 500 | 1080 | 1230 | 5.0 | 4.7 | 4.5 |
| | | 50 | 5.0 | — | — | 1.8 | 5.0 | 5.5 | 500 | 1700 | 2000 | 7.8 | 7.5 | 7.2 |
| | 2 room | 20 + 20 | 2.00 | 2.00 | — | 3.0 | 4.0 | 5.7 | 570 | 910 | 1800 | 4.2 | 4.0 | 3.8 |
| | | 20 + 25 | 1.91 | 2.39 | — | 3.0 | 4.3 | 5.9 | 570 | 1070 | 1980 | 4.9 | 4.7 | 4.5 |
| | | 20 + 35 | 1.82 | 3.18 | — | 3.0 | 5.0 | 6.2 | 570 | 1430 | 2070 | 6.6 | 6.3 | 6.0 |
| | | 20 + 50 | 1.71 | 4.29 | — | 3.0 | 6.0 | 6.5 | 570 | 1960 | 2150 | 9.0 | 8.6 | 8.2 |
| | | 25 + 25 | 2.35 | 2.35 | — | 3.0 | 4.7 | 6.2 | 570 | 1270 | 2070 | 5.8 | 5.6 | 5.3 |
| | 3 room | 25 + 35 | 2.21 | 3.09 | — | 3.0 | 5.3 | 6.5 | 570 | 1600 | 2150 | 7.3 | 7.0 | 6.7 |
| | | 25 + 50 | 2.00 | 4.00 | — | 3.0 | 6.0 | 6.5 | 570 | 1960 | 2150 | 9.0 | 8.6 | 8.2 |
| | | 35 + 35 | 3.00 | 3.00 | — | 3.0 | 6.0 | 6.5 | 570 | 1960 | 2150 | 9.0 | 8.6 | 8.2 |
| | | 35 + 50 | 2.47 | 3.53 | — | 3.0 | 6.0 | 6.5 | 570 | 1960 | 2150 | 9.0 | 8.6 | 8.2 |
| | | 20 + 20 + 20 | 1.67 | 1.67 | 1.67 | 3.4 | 5.0 | 7.1 | 690 | 1080 | 2150 | 5.0 | 4.7 | 4.5 |
| | | 20 + 20 + 25 | 1.60 | 1.60 | 2.00 | 3.4 | 5.2 | 7.1 | 690 | 1160 | 2150 | 5.3 | 5.1 | 4.9 |
| | | 20 + 20 + 35 | 1.49 | 1.49 | 2.61 | 3.4 | 5.6 | 7.1 | 690 | 1330 | 2150 | 6.1 | 5.8 | 5.6 |
| | | 20 + 25 + 25 | 1.54 | 1.93 | 1.93 | 3.4 | 5.4 | 7.1 | 690 | 1260 | 2150 | 5.8 | 5.5 | 5.3 |
| | | 20 + 25 + 35 | 1.45 | 1.81 | 2.54 | 3.4 | 5.6 | 7.1 | 690 | 1430 | 2150 | 6.6 | 6.3 | 6.0 |
| | | 25 + 25 + 25 | 1.87 | 1.87 | 1.87 | 3.4 | 5.6 | 7.1 | 690 | 1330 | 2150 | 6.1 | 5.8 | 5.6 |
| | | 25 + 25 + 35 | 1.76 | 1.76 | 2.47 | 3.4 | 6.0 | 7.1 | 690 | 1490 | 2150 | 6.8 | 6.5 | 6.3 |

SCM50ZJ-S1 Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|--------|--------|---------------------|----------|------|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room heating capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 1 room | 20 | 3.0 | — | — | 1.4 | 3.0 | 3.5 | 480 | 1020 | 1100 | 4.7 | 4.5 | 4.3 |
| | | 25 | 3.4 | — | — | 1.4 | 3.4 | 4.0 | 480 | 1180 | 1240 | 5.4 | 5.2 | 5.0 |
| | | 35 | 4.5 | — | — | 1.4 | 4.5 | 4.8 | 480 | 1470 | 1490 | 6.7 | 6.5 | 6.2 |
| | | 50 | 5.8 | — | — | 1.4 | 5.8 | 6.0 | 480 | 1910 | 2260 | 8.8 | 8.4 | 8.0 |
| | 2 room | 20 + 20 | 2.95 | 2.95 | — | 2.0 | 5.9 | 7.0 | 540 | 1510 | 2580 | 6.9 | 6.6 | 6.4 |
| | | 20 + 25 | 2.67 | 3.33 | — | 2.0 | 6.0 | 7.0 | 540 | 1560 | 2580 | 7.2 | 6.9 | 6.6 |
| | | 20 + 35 | 2.29 | 4.01 | — | 2.0 | 6.3 | 7.0 | 540 | 1650 | 2580 | 7.6 | 7.2 | 6.9 |
| | | 20 + 50 | 1.89 | 4.71 | — | 2.0 | 6.6 | 7.0 | 540 | 1740 | 2580 | 8.0 | 7.6 | 7.3 |
| | | 25 + 25 | 3.05 | 3.05 | — | 2.0 | 6.1 | 7.0 | 540 | 1590 | 2580 | 7.3 | 7.0 | 6.7 |
| | 3 room | 25 + 35 | 2.67 | 3.73 | — | 2.0 | 6.4 | 7.0 | 540 | 1680 | 2580 | 7.7 | 7.4 | 7.1 |
| | | 25 + 50 | 2.20 | 4.40 | — | 2.0 | 6.6 | 7.0 | 540 | 1740 | 2580 | 8.0 | 7.6 | 7.3 |
| | | 35 + 35 | 3.30 | 3.30 | — | 2.0 | 6.6 | 7.0 | 540 | 1740 | 2580 | 8.0 | 7.6 | 7.3 |
| | | 35 + 50 | 2.72 | 3.88 | — | 2.0 | 6.6 | 7.0 | 540 | 1740 | 2580 | 8.0 | 7.6 | 7.3 |
| | | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 3.0 | 6.0 | 7.3 | 600 | 1340 | 2580 | 6.3 | 6.1 | 5.8 |
| | 3 room | 20 + 20 + 25 | 1.91 | 1.91 | 2.38 | 3.0 | 6.2 | 7.3 | 600 | 1430 | 2580 | 6.8 | 6.5 | 6.2 |
| | | 20 + 20 + 35 | 1.76 | 1.76 | 3.08 | 3.0 | 6.6 | 7.3 | 600 | 1600 | 2580 | 7.6 | 7.2 | 6.9 |
| | | 20 + 25 + 25 | 1.83 | 2.29 | 2.29 | 3.0 | 6.4 | 7.3 | 600 | 1510 | 2580 | 7.1 | 6.8 | 6.6 |
| | | 20 + 25 + 35 | 1.70 | 2.13 | 2.98 | 3.0 | 6.8 | 7.3 | 600 | 1660 | 2580 | 7.9 | 7.5 | 7.2 |
| | | 25 + 25 + 25 | 2.20 | 2.20 | 2.20 | 3.0 | 6.6 | 7.3 | 600 | 1600 | 2580 | 7.6 | 7.2 | 6.9 |
| | | 25 + 25 + 35 | 1.87 | 1.87 | 1.87 | 3.4 | 5.6 | 6.9 | 600 | 1470 | 2150 | 7.0 | 6.7 | 6.4 |
| | | 25 + 25 + 35 | 1.76 | 1.76 | 2.47 | 3.4 | 6.0 | 6.9 | 600 | 1540 | 2150 | 7.3 | 7.0 | 6.7 |
| | | 20 + 20 + 35 | 1.49 | 1.49 | 2.61 | 3.4 | 5.6 | 6.9 | 600 | 1370 | 2150 | 6.5 | 6.2 | 5.9 |
| | | 20 + 25 + 25 | 1.54 | 1.93 | 1.93 | 3.4 | 5.4 | 6.9 | 600 | 1300 | 2150 | 6.2 | 5.9 | 5.6 |
| | | 20 + 25 + 35 | 1.45 | 1.81 | 2.54 | 3.4 | 5.8 | 6.9 | 600 | 1470 | 2150 | 7.0 | 6.7 | 6.4 |
| | | 25 + 25 + 25 | 1.87 | 1.87 | 1.87 | 3.4 | 5.6 | 6.9 | 600 | 1370 | 2150 | 6.5 | 6.2 | 5.9 |
| | | 25 + 25 + 35 | 1.76 | 1.76 | 2.47 | 3.4 | 6.0 | 6.9 | 600 | 1540 | 2150 | 7.3 | 7.0 | 6.7 |

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|--------|--------|---------------------|----------|------|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room Cooling capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 1 room | 20 | 2.0 | — | — | 1.8 | 2.0 | 2.7 | 500 | 580 | 900 | 2.7 | 2.5 | 2.4 |
| | | 25 | 2.5 | — | — | 1.8 | 2.5 | 3.2 | 500 | 760 | 1070 | 3.5 | 3.3 | 3.2 |
| | | 35 | 3.5 | — | — | 1.8 | 3.5 | 3.7 | 500 | 1140 | 1230 | 5.2 | 5.0 | 4.8 |
| | | 50 | 5.0 | — | — | 1.8 | | | | | | | | |

SCM60ZJ-S1 Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|------|------|---------------------|-----|-----|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room heating capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| Heating operation | 1 room | 20 | 3.0 | — | — | 1.5 | 3.0 | 3.7 | 600 | 780 | 1330 | 3.6 | 3.4 | 3.3 |
| | | 25 | 3.4 | — | — | 1.5 | 3.4 | 4.2 | 600 | 950 | 1510 | 4.4 | 4.2 | 4.0 |
| | | 35 | 4.5 | — | — | 1.5 | 4.5 | 5.0 | 600 | 1290 | 1790 | 5.9 | 5.7 | 5.4 |
| | | 50 | 5.8 | — | — | 1.5 | 5.8 | 6.4 | 600 | 1780 | 2310 | 8.2 | 7.8 | 7.5 |
| | | 60 | 6.8 | — | — | 1.5 | 6.8 | 7.3 | 600 | 2120 | 2660 | 9.7 | 9.3 | 8.9 |
| | 2 room | 20 + 20 | 3.00 | 3.00 | — | 2.1 | 6.0 | 7.3 | 630 | 1490 | 2100 | 6.8 | 6.5 | 6.3 |
| | | 20 + 25 | 2.71 | 3.39 | — | 2.1 | 6.1 | 7.5 | 630 | 1570 | 2550 | 7.2 | 6.9 | 6.6 |
| | | 20 + 35 | 2.36 | 4.14 | — | 2.1 | 6.5 | 7.6 | 630 | 1680 | 3000 | 7.7 | 7.4 | 7.1 |
| | | 20 + 50 | 2.00 | 5.00 | — | 2.1 | 7.0 | 7.6 | 630 | 1900 | 3000 | 8.7 | 8.3 | 8.0 |
| | | 20 + 60 | 1.78 | 5.33 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 25 + 25 | 3.15 | 3.15 | — | 2.1 | 6.3 | 7.6 | 630 | 1630 | 3000 | 7.5 | 7.2 | 6.9 |
| | | 25 + 35 | 2.79 | 3.91 | — | 2.1 | 6.7 | 7.6 | 630 | 1760 | 3000 | 8.1 | 7.7 | 7.4 |
| | | 25 + 50 | 2.37 | 4.73 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 25 + 60 | 2.09 | 5.01 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 35 + 35 | 3.50 | 3.50 | — | 2.1 | 7.0 | 7.6 | 630 | 1900 | 3000 | 8.7 | 8.3 | 8.0 |
| | 3 room | 35 + 50 | 2.92 | 4.18 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 35 + 60 | 2.62 | 4.48 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 50 + 50 | 3.55 | 3.55 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 50 + 60 | 3.23 | 3.87 | — | 2.1 | 7.1 | 7.6 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 20 + 20 + 20 | 2.20 | 2.20 | 2.20 | 3.2 | 6.6 | 7.8 | 660 | 1350 | 3000 | 6.4 | 6.1 | 5.9 |
| | | 20 + 20 + 25 | 2.06 | 2.58 | — | 3.2 | 6.7 | 7.8 | 660 | 1390 | 3000 | 6.6 | 6.3 | 6.0 |
| | | 20 + 20 + 35 | 1.81 | 1.81 | 3.17 | 3.2 | 6.8 | 7.8 | 660 | 1510 | 3000 | 7.1 | 6.8 | 6.6 |
| | | 20 + 20 + 50 | 1.56 | 1.56 | 3.89 | 3.2 | 7.0 | 7.8 | 660 | 1690 | 3000 | 8.0 | 7.7 | 7.3 |
| | | 20 + 20 + 60 | 1.44 | 1.44 | 4.32 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |
| | | 20 + 25 + 25 | 1.94 | 2.43 | 2.43 | 3.2 | 6.8 | 7.8 | 660 | 1510 | 3000 | 7.1 | 6.8 | 6.6 |
| | | 20 + 25 + 35 | 1.73 | 2.16 | 3.02 | 3.2 | 6.9 | 7.8 | 660 | 1560 | 3000 | 7.4 | 7.1 | 6.8 |
| | | 20 + 25 + 50 | 1.49 | 1.87 | 3.74 | 3.2 | 7.1 | 7.8 | 660 | 1740 | 3000 | 8.2 | 7.9 | 7.6 |
| | | 20 + 25 + 60 | 1.37 | 1.71 | 4.11 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |
| | | 20 + 35 + 35 | 1.56 | 2.72 | 2.72 | 3.2 | 7.0 | 7.8 | 660 | 1690 | 3000 | 8.0 | 7.7 | 7.3 |
| | | 20 + 35 + 50 | 1.37 | 2.40 | 3.43 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |
| | | 25 + 25 + 25 | 2.27 | 2.27 | 2.27 | 3.2 | 6.8 | 7.8 | 660 | 1510 | 3000 | 7.1 | 6.8 | 6.6 |
| | | 25 + 25 + 35 | 2.06 | 2.06 | 2.88 | 3.2 | 7.0 | 7.8 | 660 | 1690 | 3000 | 8.0 | 7.7 | 7.3 |
| | | 25 + 25 + 50 | 1.80 | 1.80 | 3.60 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |
| | | 25 + 25 + 60 | 1.64 | 1.64 | 3.93 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |
| | | 25 + 35 + 35 | 1.87 | 2.62 | 2.62 | 3.2 | 7.1 | 7.8 | 660 | 1740 | 3000 | 8.2 | 7.9 | 7.6 |
| | | 25 + 35 + 50 | 1.64 | 2.29 | 3.27 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |
| | | 35 + 35 + 35 | 2.40 | 2.40 | 2.40 | 3.2 | 7.2 | 7.8 | 660 | 1860 | 3000 | 8.8 | 8.4 | 8.1 |

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|------|------|---------------------|-----|-----|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room Cooling capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| Cooling operation | 1 room | 20 | 2.0 | — | — | 1.8 | 2.0 | 2.8 | 500 | 540 | 950 | 2.5 | 2.4 | 2.3 |
| | | 25 | 2.5 | — | — | 1.8 | 2.5 | 3.4 | 500 | 720 | 1080 | 3.3 | 3.2 | 3.0 |
| | | 35 | 3.5 | — | — | 1.8 | 3.5 | 3.9 | 500 | 1090 | 1240 | 5.0 | 4.8 | 4.6 |
| | | 50 | 5.0 | — | — | 1.8 | 5.0 | 5.8 | 500 | 1780 | 2100 | 8.2 | 7.8 | 7.5 |
| | | 60 | 6.0 | — | — | 1.8 | 6.0 | 6.3 | 500 | 2260 | 2370 | 10.4 | 9.9 | 9.5 |
| | 2 room | 20 + 20 | 2.00 | 2.00 | — | 3.0 | 4.0 | 5.7 | 570 | 750 | 1750 | 3.4 | 3.3 | 3.2 |
| | | 20 + 25 | 2.00 | 2.50 | — | 3.0 | 4.5 | 5.9 | 570 | 990 | 1910 | 4.5 | 4.3 | 4.2 |
| | | 20 + 35 | 1.93 | 3.37 | — | 3.0 | 5.3 | 6.2 | 570 | 1550 | 2110 | 7.1 | 6.8 | 6.5 |
| | | 20 + 50 | 1.89 | 4.71 | — | 3.0 | 6.6 | 6.9 | 570 | 2280 | 2390 | 10.5 | 10.0 | 9.6 |
| | | 20 + 60 | 1.68 | 5.03 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 25 + 25 | 2.45 | 2.45 | — | 3.0 | 4.9 | 6.2 | 570 | 1270 | 2110 | 5.8 | 5.6 | 5.3 |
| | | 25 + 35 | 2.42 | 3.38 | — | 3.0 | 5.8 | 6.5 | 570 | 1840 | 2270 | 8.4 | 8.1 | 7.7 |
| | | 25 + 50 | 2.23 | 4.47 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 25 + 60 | 1.97 | 4.73 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 35 + 35 | 3.30 | 3.30 | — | 3.0 | 6.6 | 6.9 | 570 | 2280 | 2390 | 10.5 | 10.0 | 9.6 |
| | 3 room | 35 + 50 | 2.76 | 3.94 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 35 + 60 | 2.47 | 4.23 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 50 + 50 | 3.35 | 3.35 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 50 + 60 | 3.05 | 3.65 | — | 3.0 | 6.7 | 6.9 | 570 | 2320 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 20 + 20 + 20 | 1.90 | 1.90 | 1.90 | 3.6 | 5.7 | 7.5 | 690 | 1390 | 2390 | 6.6 | 6.3 | 6.0 |
| | | 20 + 20 + 25 | 1.82 | 1.82 | 2.27 | 3.6 | 5.9 | 7.5 | 690 | 1410 | 2390 | 6.7 | 6.4 | 6.1 |
| | | 20 + 20 + 35 | 1.60 | 1.60 | 2.80 | 3.6 | 6.0 | 7.5 | 690 | 1430 | 2390 | 6.8 | 6.5 | 6.2 |
| | | 20 + 20 + 50 | 1.40 | 1.40 | 3.50 | 3.6 | 6.3 | 7.5 | 690 | 1480 | 2390 | 7.0 | 6.7 | 6.4 |
| | | 20 + 20 + 60 | 1.28 | 1.28 | 3.84 | 3.6 | 6.4 | 7.5 | 690 | 1500 | 2390 | 7.1 | 6.8 | 6.5 |
| | | 20 + 25 + 25 | 1.69 | 2.11 | 2.11 | 3.6 | 5.9 | 7.5 | 690 | 1410 | 2390 | 6.7 | 6.4 | 6.1 |
| | | 20 + 25 + 35 | 1.53 | 1.91 | 2.67 | 3.6 | 6.1 | 7.5 | 690 | 1460 | 2390 | 6.9 | 6.6 | 6.3 |
| | | 20 + 25 + 50 | 1.35 | 1.68 | 3.37 | 3.6 | 6.4 | 7.5 | 690 | 1500 | 2390 | 7.1 | 6.8 | 6.5 |
| | | 20 + 25 + 60 | 1.26 | 1.57 | 3.77 | 3.6 | 6.6 | 7.5 | 690 | 1520 | 2390 | 7.2 | 6.9 | 6.6 |
| | | 20 + 35 + 35 | 1.40 | 2.45 | 2.45 | 3.6 | 6.3 | 7.5 | 690 | 1480 | 2390 | 7.0 | 6.7 | 6.4 |
| | | 20 + 35 + 50 | 1.26 | 2.20 | 3.14 | 3.6 | 6.6 | 7.5 | 690 | 1520 | 2390 | 7.2 | 6.9 | 6.6 |
| | | 25 + 25 + 25 | 2.00 | 2.00 | 2.00 | 3.6 | 6.0 | 7.5 | 690 | 1430 | 2390 | 6.8 | 6.5 | 6.2 |
| | | 25 + 25 + 35 | 1.79 | 1.79 | 2.51 | 3.6 | 6.1 | 7.5 | 690 | 1460 | 2390 | 6.9 | 6.6 | 6.3 |
| | | 25 + 25 + 50 | 1.60 | 1.60 | 3.20 | 3.6 | 6.4 | 7.5 | 690 | 1500 | 2390 | 7.1 | 6.8 | 6.5 |
| | | 25 + 25 + 60 | 1.52 | 1.52 | 3.65 | 3.6 | 6.7 | 7.5 | 690 | 1540 | 2390 | 7.3 | 7.0 | 6.7 |
| | | 25 + 35 + 35 | 1.68 | 2.36 | 2.36 | 3.6 | 6.4 | 7.5 | 690 | 1500 | 2390 | 7.1 | 6.8 | 6.5 |
| | | 25 + 35 + 50 | 1.52 | 2.13 | 3.05 | 3.6 | 6.7 | 7.5 | 690 | 1540 | | | | |

INVERTER MULTI-SPLIT SYSTEM

SCM60ZJ-S1 Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|------|------|---------------------|-----|-----|-----------------------|----------|------|----------------------|------|------|------|
| | | Room heating capacity (kW) | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| Heating operation | 1 room | 20 | 3.0 | — | — | 1.5 | 3.0 | 3.5 | 600 | 970 | 1330 | 4.5 | 4.3 | 4.1 |
| | | 25 | 3.4 | — | — | 1.5 | 3.4 | 4.0 | 600 | 1140 | 1510 | 5.2 | 5.0 | 4.8 |
| | | 35 | 4.5 | — | — | 1.5 | 4.5 | 4.8 | 600 | 1480 | 1790 | 6.8 | 6.5 | 6.2 |
| | | 50 | 5.8 | — | — | 1.5 | 5.8 | 6.1 | 600 | 1960 | 2310 | 9.0 | 8.6 | 8.2 |
| | | 60 | 6.8 | — | — | 1.5 | 6.8 | 7.0 | 600 | 2250 | 2660 | 10.3 | 9.9 | 9.5 |
| | | 20 + 20 | 3.00 | 3.00 | — | 2.1 | 6.0 | 7.0 | 630 | 1520 | 2100 | 7.0 | 6.7 | 6.4 |
| | | 20 + 25 | 2.71 | 3.39 | — | 2.1 | 6.1 | 7.2 | 630 | 1600 | 2550 | 7.3 | 7.0 | 6.7 |
| | | 20 + 35 | 2.36 | 4.14 | — | 2.1 | 6.5 | 7.3 | 630 | 1710 | 3000 | 7.9 | 7.5 | 7.2 |
| | | 20 + 50 | 2.00 | 5.00 | — | 2.1 | 7.0 | 7.3 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 20 + 60 | 1.78 | 5.33 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| 2 room | | 25 + 25 | 3.15 | 3.15 | — | 2.1 | 6.3 | 7.3 | 630 | 1660 | 3000 | 7.6 | 7.3 | 7.0 |
| | | 25 + 35 | 2.79 | 3.91 | — | 2.1 | 6.7 | 7.3 | 630 | 1790 | 3000 | 8.2 | 7.9 | 7.5 |
| | | 25 + 50 | 2.37 | 4.73 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| | | 25 + 60 | 2.09 | 5.01 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| | | 35 + 35 | 3.50 | 3.50 | — | 2.1 | 7.0 | 7.3 | 630 | 1940 | 3000 | 8.9 | 8.5 | 8.2 |
| | | 35 + 50 | 2.92 | 4.18 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| | | 35 + 60 | 2.62 | 4.48 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| | | 50 + 50 | 3.55 | 3.55 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| | | 50 + 60 | 3.23 | 3.87 | — | 2.1 | 7.1 | 7.3 | 630 | 1980 | 3000 | 9.1 | 8.7 | 8.3 |
| | | 20 + 20 + 20 | 2.20 | 2.20 | 2.20 | 3.2 | 6.6 | 7.6 | 660 | 1380 | 3000 | 6.5 | 6.3 | 6.0 |
| 3 room | | 20 + 20 + 25 | 2.06 | 2.06 | 2.58 | 3.2 | 6.7 | 7.6 | 660 | 1420 | 3000 | 6.7 | 6.4 | 6.2 |
| | | 20 + 20 + 35 | 1.81 | 1.81 | 3.17 | 3.2 | 6.8 | 7.6 | 660 | 1540 | 3000 | 7.3 | 7.0 | 6.7 |
| | | 20 + 20 + 50 | 1.56 | 1.56 | 3.89 | 3.2 | 7.0 | 7.6 | 660 | 1730 | 3000 | 8.2 | 7.8 | 7.5 |
| | | 20 + 20 + 60 | 1.44 | 1.44 | 4.32 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| | | 20 + 25 + 25 | 1.94 | 2.43 | 2.43 | 3.2 | 6.8 | 7.6 | 660 | 1540 | 3000 | 7.3 | 7.0 | 6.7 |
| | | 20 + 25 + 35 | 1.73 | 2.16 | 3.02 | 3.2 | 6.9 | 7.6 | 660 | 1590 | 3000 | 7.5 | 7.2 | 6.9 |
| | | 20 + 25 + 50 | 1.49 | 1.87 | 3.74 | 3.2 | 7.1 | 7.6 | 660 | 1780 | 3000 | 8.4 | 8.1 | 7.7 |
| | | 20 + 25 + 60 | 1.37 | 1.71 | 4.11 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| | | 20 + 35 + 35 | 1.56 | 2.72 | 2.72 | 3.2 | 7.0 | 7.6 | 660 | 1730 | 3000 | 8.2 | 7.8 | 7.5 |
| | | 20 + 35 + 50 | 1.37 | 2.40 | 3.43 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| Cooling operation | | 25 + 25 + 25 | 2.27 | 2.27 | 2.27 | 3.2 | 6.8 | 7.6 | 660 | 1540 | 3000 | 7.3 | 7.0 | 6.7 |
| | | 25 + 25 + 35 | 2.06 | 2.06 | 2.88 | 3.2 | 7.0 | 7.6 | 660 | 1730 | 3000 | 8.2 | 7.8 | 7.5 |
| | | 25 + 25 + 50 | 1.80 | 1.80 | 3.60 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| | | 25 + 25 + 60 | 1.64 | 1.64 | 3.93 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| | | 25 + 35 + 35 | 1.87 | 2.62 | 2.62 | 3.2 | 7.1 | 7.6 | 660 | 1780 | 3000 | 8.4 | 8.1 | 7.7 |
| | | 25 + 35 + 50 | 1.64 | 2.29 | 3.27 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| | | 35 + 35 + 35 | 2.40 | 2.40 | 2.40 | 3.2 | 7.2 | 7.6 | 660 | 1900 | 3000 | 9.0 | 8.6 | 8.2 |
| | | 20 + 20 + 20 | 2.00 | 2.00 | — | 3.0 | 4.0 | 5.6 | 570 | 800 | 1750 | 3.7 | 3.5 | 3.4 |
| | | 20 + 20 + 25 | 2.00 | 2.50 | — | 3.0 | 4.5 | 5.8 | 570 | 1050 | 1910 | 4.8 | 4.6 | 4.4 |
| | | 20 + 20 + 35 | 1.93 | 3.37 | — | 3.0 | 5.3 | 6.1 | 570 | 1620 | 2110 | 7.4 | 7.1 | 6.8 |
| 3 room | | 20 + 20 + 50 | 1.89 | 4.71 | — | 3.0 | 6.6 | 6.8 | 570 | 2330 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 20 + 20 + 60 | 1.68 | 5.03 | — | 3.0 | 6.7 | 6.8 | 570 | 2370 | 2390 | 10.9 | 10.4 | 10.0 |
| | | 25 + 25 + 25 | 2.45 | 2.45 | — | 3.0 | 4.9 | 6.1 | 570 | 1340 | 2110 | 6.2 | 5.9 | 5.6 |
| | | 25 + 25 + 35 | 2.42 | 3.38 | — | 3.0 | 5.8 | 6.4 | 570 | 1920 | 2270 | 8.8 | 8.4 | 8.1 |
| | | 25 + 25 + 50 | 2.23 | 4.47 | — | 3.0 | 6.7 | 6.8 | 570 | 2370 | 2390 | 10.9 | 10.4 | 10.0 |
| | | 25 + 25 + 60 | 1.97 | 4.73 | — | 3.0 | 6.7 | 6.8 | 570 | 2370 | 2390 | 10.9 | 10.4 | 10.0 |
| | | 35 + 35 + 35 | 3.30 | 3.30 | — | 3.0 | 6.6 | 6.8 | 570 | 2330 | 2390 | 10.7 | 10.2 | 9.8 |
| | | 35 + 50 + 50 | 2.76 | 3.94 | — | 3.0 | 6.7 | 6.8 | 570 | 2370 | 2390 | 10.9 | 10.4 | 10.0 |
| | | 35 + 60 + 60 | 2.47 | 4.23 | — | 3.0 | 6.7 | 6.8 | 570 | 2370 | 2390 | 10.9 | 10.4 | 10.0 |
| | | 50 + 50 + 50 | 3.35 | 3.35 | — | 3.0 | 6.7 | 6.8 | 570 | 2370 | 2390 | 10.9 | 10.4 | 10.0 |
| Cooling operation | | 20 + 20 + 20 | 1.90 | 1.90 | 1.90 | 3.6 | 5.7 | 7.3 | 690 | 1430 | 2390 | 6.8 | 6.5 | 6.2 |
| | | 20 + 20 + 25 | 1.82 | 1.82 | 2.27 | 3.6 | 5.9 | 7.3 | 690 | 1450 | 2390 | 6.9 | 6.6 | 6.3 |
| | | 20 + 20 + 35 | 1.60 | 1.60 | 2.80 | 3.6 | 6.0 | 7.3 | 690 | 1470 | 2390 | 7.0 | 6.7 | 6.4 |
| | | 20 + 20 + 50 | 1.40 | 1.40 | 3.50 | 3.6 | 6.3 | 7.3 | 690 | 1520 | 2390 | 7.2 | 6.9 | 6.6 |
| | | 20 + 20 + 60 | 1.28 | 1.28 | 3.84 | 3.6 | 6.4 | 7.3 | 690 | 1540 | 2390 | 7.3 | 7.0 | 6.7 |
| | | 20 + 25 + 25 | 1.69 | 2.11 | 2.11 | 3.6 | 5.9 | 7.3 | 690 | 1450 | 2390 | 6.9 | 6.6 | 6.3 |
| | | 20 + 25 + 35 | 1.53 | 1.91 | 2.67 | 3.6 | 6.1 | 7.3 | 690 | 1500 | 2390 | 7.1 | 6.8 | 6.5 |
| | | 20 + 25 + 50 | 1.35 | 1.68 | 3.37 | 3.6 | 6.4 | 7.3 | 690 | 1540 | 2390 | 7.3 | 7.0 | 6.7 |
| | | 20 + 25 + 60 | 1.26 | 1.57 | 3.77 | 3.6 | 6.6 | 7.3 | 690 | 1560 | 2390 | 7.4 | 7.1 | 6.8 |
| | | 20 + 35 + 35 | 1.40 | 2.45 | 2.45 | 3.6 | 6.3 | 7.3 | 690 | 1520 | 2390 | 7.2 | 6.9 | 6.6 |
| 3 room | | 20 + 35 + 50 | 1.26 | 2.20 | 3.14 | 3.6 | 6.6 | 7.3 | 690 | 1560 | 2390 | 7.4 | 7.1 | 6.8 |
| | | 25 + 25 + 25 | 2.00 | 2.00 | 2.00 | 3.6 | 6.0 | 7.3 | 690 | 1470 | 2390 | 7.0 | 6.7 | 6.4 |
| | | 25 + 25 + 35 | 1.79 | 1.79 | 2.51 | 3.6 | 6.1 | 7.3 | 690 | 1500 | 2390 | 7.1 | 6.8 | 6.5 |
| | | 25 + 25 + 50 | 1.60 | 1.60 | 3.20 | 3.6 | 6.4 | 7.3 | 690 | 1540 | 2390 | 7.3 | 7.0 | 6.7 |
| | | 25 + 25 + 60 | 1.52 | 1.52 | 3.65 | 3.6 | 6.7 | 7.3 | 690 | 1580 | 2390 | 7.5 | 7.2 | 6.9 |
| | | 25 + 35 + 35 | 1.68 | 2.36 | 2.36 | 3.6 | 6.4 | 7.3 | 690 | 1540 | 2390 | 7.3 | 7.0 | 6.7 |
| | | 25 + 35 + 50 | 1.52 | 2.13 | 3.05 | 3.6 | 6.7 | 7.3 | 690 | 1580 | 2390 | 7.5 | 7.2 | 6.9 |
| | | 35 + 35 + 35 | 2.20 | 2.20 | 2.20 | 3.6 | 6.6 | 7.3 | 690 | 1560 | 2390 | 7.4 | 7.1 | 6.8 |

SCM71ZJ-S1 Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | Min. | Standard | Max. | | | | | | |
| 1 room | 20 | 3.0 | — | — | — | 1.5 | 3.0 | 3.7 | 600 | 840 | 1330 | 3.9 | 3.7 | 3.5 |
| | 25 | 3.4 | — | — | — | 1.5 | 3.4 | 4.2 | 600 | 1000 | 1510 | 4.6 | 4.4 | 4.2 |
| | 35 | 4.5 | — | — | — | 1.5 | 4.5 | 5.0 | 600 | 1330 | 1790 | 6.1 | 5.8 | 5.6 |
| | 50 | 5.8 | — | — | — | 1.5 | 5.8 | 6.5 | 600 | 1780 | 2310 | 8.2 | 7.8 | 7.5 |
| | 60 | 6.8 | — | — | — | 1.5 | 6.8 | 7.5 | 600 | 2100 | 2660 | 9.6 | 9.2 | 8.8 |
| | 20 + 20 | 2.70 | 2.70 | — | — | 2.1 | 5.4 | 7.4 | 630 | 1340 | 1870 | 6.2 | 5.9 | 5.6 |
| | 20 + 25 | 2.62 | 3.28 | — | — | 2.1 | 5.9 | 7.7 | 630 | 1530 | 2130 | 7.0 | 6.7 | 6.4 |
| | 20 + 35 | 2.51 | 4.39 | — | — | 2.1 | 6.9 | 8.3 | 630 | 1910 | 2650 | 8.8 | 8.4 | 8.0 |
| | 20 + 50 | 2.34 | 5.86 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 20 + 60 | 2.05 | 6.15 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| 2 room | 25 + 25 | 3.20 | 3.20 | — | — | 2.1 | 6.4 | 8.1 | 630 | 1700 | 2480 | 7.8 | 7.5 | 7.2 |
| | 25 + 35 | 3.08 | 4.32 | — | — | 2.1 | 7.4 | 8.6 | 630 | 2090 | 2910 | 9.6 | 9.2 | 8.8 |
| | 25 + 50 | 2.73 | 5.47 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 25 + 60 | 2.41 | 5.79 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 35 + 35 | 4.10 | 4.10 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 35 + 50 | 3.38 | 4.82 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 35 + 60 | 3.02 | 5.18 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 50 + 50 | 4.10 | 4.10 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 50 + 60 | 3.73 | 4.47 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| | 60 + 60 | 4.10 | 4.10 | — | — | 2.1 | 8.2 | 8.7 | 630 | 2430 | 3350 | 11.2 | 10.7 | 10.2 |
| Heating operation | 20 + 20 + 20 | 2.57 | 2.57 | — | — | 3.2 | 7.7 | 9.1 | 660 | 1830 | 3350 | 8.4 | 8.0 | 7.7 |
| | 20 + 20 + 25 | 2.46 | 2.46 | 3.08 | — | 3.2 | 8.0 | 9.1 | 660 | 1930 | 3350 | 8.9 | 8.5 | 8.1 |
| | 20 + 20 + 35 | 2.24 | 2.24 | 3.92 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 20 + 50 | 1.87 | 1.87 | 4.67 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 20 + 60 | 1.68 | 1.68 | 5.04 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 25 + 25 | 2.34 | 2.93 | 2.93 | — | 3.2 | 8.2 | 9.1 | 660 | 1990 | 3350 | 9.1 | 8.7 | 8.4 |
| | 20 + 25 + 35 | 2.10 | 2.63 | 3.68 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 25 + 50 | 1.77 | 2.21 | 4.42 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 25 + 60 | 1.60 | 2.00 | 4.80 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 35 + 35 | 1.87 | 3.27 | 3.27 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 35 + 50 | 1.60 | 2.80 | 4.00 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 35 + 60 | 1.46 | 2.56 | 4.38 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 20 + 50 + 50 | 1.40 | 3.50 | 3.50 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 25 + 25 | 2.80 | 2.80 | 2.80 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 25 + 35 | 2.47 | 3.46 | — | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 25 + 50 | 2.10 | 2.10 | 4.20 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 25 + 60 | 1.91 | 1.91 | 4.58 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 35 + 35 | 2.21 | 3.09 | 3.09 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 35 + 50 | 1.91 | 2.67 | 3.82 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 35 + 60 | 1.75 | 2.45 | 4.20 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 25 + 50 + 50 | 1.68 | 3.36 | 3.36 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 35 + 35 + 35 | 2.80 | 2.80 | 2.80 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| | 35 + 35 + 50 | 2.45 | 2.45 | 3.50 | — | 3.2 | 8.4 | 9.1 | 660 | 2060 | 3350 | 9.5 | 9.0 | 8.7 |
| 3 room | 20 + 20 + 20 + 20 | 2.10 | 2.10 | 2.10 | — | 3.6 | 8.4 | 9.4 | 800 | 1960 | 3350 | 9.0 | 8.6 | 8.2 |
| | 20 + 20 + 20 + 25 | 1.98 | 1.98 | 1.98 | 2.47 | 3.6 | 8.4 | 9.4 | 800 | 1960 | 3350 | 9.0 | 8.6 | 8.2 |
| | 20 + 20 + 20 + 35 | 1.79 | 1.79 | 1.79 | 3.13 | 3.6 | 8.5 | 9.4 | 800 | 1980 | 3350 | 9.1 | 8.7 | 8.3 |
| | 20 + 20 + 20 + 50 | 1.56 | 1.56 | 1.56 | 3.91 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 20 + 20 + 60 | 1.43 | 1.43 | 1.43 | 4.30 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 20 + 25 + 25 | 1.89 | 1.89 | 2.36 | 2.36 | 3.6 | 8.5 | 9.4 | 800 | 1980 | 3350 | 9.1 | 8.7 | 8.3 |
| | 20 + 20 + 25 + 35 | 1.70 | 1.70 | 2.13 | 2.98 | 3.6 | 8.5 | 9.4 | 800 | 1980 | 3350 | 9.1 | 8.7 | 8.3 |
| | 20 + 20 + 25 + 50 | 1.50 | 1.50 | 1.87 | 3.74 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 20 + 25 + 60 | 1.38 | 1.38 | 1.72 | 4.13 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 20 + 35 + 35 | 1.56 | 1.56 | 2.74 | 2.74 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 20 + 35 + 50 | 1.38 | 1.38 | 2.41 | 3.44 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 25 + 25 + 25 | 1.79 | 2.24 | 2.24 | 2.24 | 3.6 | 8.5 | 9.4 | 800 | 1980 | 3350 | 9.1 | 8.7 | 8.3 |
| | 20 + 25 + 25 + 35 | 1.64 | 2.05 | 2.05 | 2.87 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 25 + 25 + 50 | 1.43 | 1.79 | 1.79 | 3.58 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 25 + 35 + 35 | 1.50 | 1.87 | 2.62 | 2.62 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 20 + 35 + 35 + 35 | 1.38 | 2.41 | 2.41 | 2.41 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 25 + 25 + 25 + 25 | 2.13 | 2.13 | 2.13 | 2.13 | 3.6 | 8.5 | 9.4 | 800 | 1980 | 3350 | 9.1 | 8.7 | 8.3 |
| | 25 + 25 + 25 + 35 | 1.95 | 1.95 | 2.74 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 | |
| | 25 + 25 + 25 + 50 | 1.72 | 1.72 | 3.44 | 3.44 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| | 25 + 25 + 35 + 35 | 1.79 | 2.51 | 2.51 | 2.51 | 3.6 | 8.6 | 9.4 | 800 | 2000 | 3350 | 9.2 | 8.8 | 8.4 |
| Cooling operation | 20 + 20 + 20 | 2.00 | 2.00 | — | — | 3.7 | 6.0 | 8.2 | 670 | 1380 | 2750 | 6.3 | 6.1 | 5.8 |
| | 20 + 20 + 25 | 2.00 | 2.00 | 2.00 | — | 3.7 | 6.5 | 8.2 | 670 | 1560 | 2750 | 7.2 | 6.9 | 6.6 |
| | 25 + 25 | 2.5 | — | — | — | 3.0 | 4.0 | 6.1 | 550 | 850 | 1910 | 3.9 | 3.7 | 3.6 |
| | 25 + 35 | 2.00 | 3.50 | — | — | 3.0 | 5.5 | 6.9 | 550 | 1470 | 2320 | 6.7 | 6.5 | 6.2 |
| | 20 + 50 | 1.94 | 4.86 | — | — | 3.0 | 6.8 | 7.7 | 550 | 2030 | 2750 | 9.3 | 8.9 | 8.5 |
| | 20 + 60 | 1.70 | 5.10 | — | — | 3.0 | 6.8 | 7.7 | 550 | 2030 | 2750 | 9.3 | 8.9 | 8.5 |
| | 25 + 25 | 2.50 | 2.50 | — | — | 3.0 | 5.0 | 6.8 | 550 | 1250 | 2270 | 5.7 | 5.5 | 5.3 |
| | 25 + 35 | 2.46 | 3.44 | — | — | 3.0 | 5.9 | 7.2 | 550 | 1660 | 2470 | 7.6 | 7.3 | 7.0 |
| | 25 + 50 | 2.27 | 4.53 | — | — | 3.0 | 6.8 | 7.7 | 550 | 2030 | 2750 | 9.3 | 8.9 | 8.5 |
| | 25 + 60 | 2.00 | 4.80 | — | — | 3.0 | 6.8 | 7.7 | 550 | 2030 | 2750 | 9.3 | 8.9 | 8.5 |
| | 35 + 35 | 3.40 | 3.40 | — | — | 3.0 | 6.8 | 7.6 | 550 | 2030 | 2680 | 9.3 | 8.9 | 8.5 |
| | 35 + 50 | 2.80 | 4.00 | — | — | 3.0 | 6.8 | 7.7 | 550 | 2030 | 2750 | 9.3 | 8.9 | 8.5 |
| | 35 + 60 | 2.51 | 4.29 | — | — | 3.0 | 6.8 | 7.7 | 550 | 2030 | 2750 | 9.3 | 8.9 | 8.5 |
| | 50 + 50 | 3.40 | 3.40 | — | — | 3.0 | 6.8 | 7.7 | | | | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|------|----------|----------------------|------|------|------|
| | | Room cooling capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | Min. | Standard | Max. | | | | | | |
| 3 room | 20 + 20 + 35 | 1.84 | 1.84 | 3.22 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 20 + 50 | 1.53 | 1.53 | 3.83 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 20 + 60 | 1.38 | 1.38 | 4.14 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 25 + 25 | 1.94 | 2.43 | 2.43 | — | 3.7 | 6.8 | 8.2 | 670 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 25 + 35 | 1.73 | 2.16 | 3.02 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 25 + 50 | 1.45 | 1.82 | 3.63 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 25 + 60 | 1.31 | 1.64 | 3.94 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 35 + 35 | 1.53 | 2.68 | 2.68 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 35 + 50 | 1.31 | 2.30 | 3.29 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 35 + 60 | 1.20 | 2.10 | 3.60 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 20 + 50 + 50 | 1.15 | 2.88 | 2.88 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 25 + 25 | 2.30 | 2.30 | 2.30 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 25 + 35 | 2.03 | 2.03 | 2.84 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 25 + 50 | 1.73 | 1.73 | 3.45 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 25 + 60 | 1.57 | 1.57 | 3.76 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 35 + 35 | 1.82 | 2.54 | 2.54 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 35 + 50 | 1.57 | 2.20 | 3.14 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 35 + 60 | 1.44 | 2.01 | 3.45 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 25 + 50 + 50 | 1.38 | 2.76 | 2.76 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 35 + 35 + 35 | 2.30 | 2.30 | 2.30 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| | 35 + 35 + 50 | 2.01 | 2.01 | 2.88 | — | 3.7 | 6.9 | 8.2 | 670 | 1830 | 2750 | 8.4 | 8.0 | 7.7 |
| 4 room | 20 + 20 + 20 + 20 | 1.73 | 1.73 | 1.73 | 1.73 | 4.4 | 6.9 | 8.8 | 890 | 1700 | 2750 | 7.8 | 7.5 | 7.2 |
| | 20 + 20 + 20 + 25 | 1.62 | 1.62 | 1.62 | 2.03 | 4.4 | 6.9 | 8.8 | 890 | 1700 | 2750 | 7.8 | 7.5 | 7.2 |
| | 20 + 20 + 20 + 35 | 1.49 | 1.49 | 1.49 | 2.62 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 20 + 50 | 1.29 | 1.29 | 1.29 | 3.23 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 20 + 60 | 1.18 | 1.18 | 1.18 | 3.55 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 25 + 25 | 1.53 | 1.53 | 1.92 | 1.92 | 4.4 | 6.9 | 8.8 | 890 | 1700 | 2750 | 7.8 | 7.5 | 7.2 |
| | 20 + 20 + 25 + 35 | 1.42 | 1.42 | 1.78 | 2.49 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 25 + 50 | 1.23 | 1.23 | 1.54 | 3.09 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 25 + 60 | 1.14 | 1.14 | 1.42 | 3.41 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 35 + 35 | 1.29 | 1.29 | 2.26 | 2.26 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 20 + 35 + 50 | 1.14 | 1.14 | 1.99 | 2.84 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 25 + 25 + 25 | 1.49 | 1.87 | 1.87 | 1.87 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 25 + 25 + 35 | 1.35 | 1.69 | 1.69 | 2.37 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 25 + 25 + 50 | 1.18 | 1.48 | 1.48 | 2.96 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 25 + 35 + 35 | 1.23 | 1.54 | 2.16 | 2.16 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 20 + 35 + 35 + 35 | 1.14 | 1.99 | 1.99 | 1.99 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 25 + 25 + 25 + 25 | 1.78 | 1.78 | 1.78 | 1.78 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 25 + 25 + 25 + 35 | 1.61 | 1.61 | 1.61 | 2.26 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 25 + 25 + 25 + 50 | 1.42 | 1.42 | 1.42 | 2.84 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |
| | 25 + 25 + 35 + 35 | 1.48 | 1.48 | 2.07 | 2.07 | 4.4 | 7.1 | 8.8 | 890 | 1740 | 2750 | 8.0 | 7.6 | 7.3 |

SCM71ZJ-S1 Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------------|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|------|----------|----------------------|------|------|------|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | Min. | Standard | Max. | | | | | | |
| 1 room | 20 | 3.0 | — | — | — | 1.5 | 3.0 | 3.5 | 600 | 1060 | 1330 | 4.9 | 4.7 | 4.5 |
| | 25 | 3.4 | — | — | — | 1.5 | 3.4 | 4.0 | 600 | 1220 | 1510 | 5.6 | 5.4 | 5.1 |
| | 35 | 4.5 | — | — | — | 1.5 | 4.5 | 4.8 | 600 | 1510 | 1790 | 6.9 | 6.6 | 6.4 |
| | 50 | 5.8 | — | — | — | 1.5 | 5.8 | 6.2 | 600 | 1950 | 2310 | 9.0 | 8.6 | 8.2 |
| | 60 | 6.8 | — | — | — | 1.5 | 6.8 | 7.1 | 600 | 2240 | 2660 | 10.3 | 9.8 | 9.4 |
| 2 room | 20 + 20 | 2.70 | 2.70 | — | — | 2.1 | 5.4 | 7.0 | 630 | 1370 | 1870 | 6.3 | 6.0 | 5.8 |
| | 20 + 25 | 2.62 | 3.28 | — | — | 2.1 | 5.9 | 7.3 | 630 | 1560 | 2130 | 7.2 | 6.9 | 6.6 |
| | 20 + 35 | 2.51 | 4.39 | — | — | 2.1 | 6.9 | 7.9 | 630 | 1950 | 2650 | 9.0 | 8.6 | 8.2 |
| | 20 + 50 | 2.34 | 5.86 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 20 + 60 | 2.05 | 6.15 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 25 + 25 | 3.20 | 3.20 | — | — | 2.1 | 6.4 | 7.7 | 630 | 1740 | 2480 | 8.0 | 7.6 | 7.3 |
| | 25 + 35 | 3.08 | 4.32 | — | — | 2.1 | 7.4 | 8.2 | 630 | 2130 | 2910 | 9.8 | 9.4 | 9.0 |
| | 25 + 50 | 2.73 | 5.47 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 25 + 60 | 2.41 | 5.79 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 35 + 35 | 4.10 | 4.10 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| 3 room | 35 + 50 | 3.38 | 4.82 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 35 + 60 | 3.02 | 5.18 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 50 + 50 | 4.10 | 4.10 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 50 + 60 | 3.73 | 4.47 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 60 + 60 | 4.10 | 4.10 | — | — | 2.1 | 8.2 | 8.3 | 630 | 2490 | 3350 | 11.4 | 10.9 | 10.5 |
| | 20 + 20 + 20 | 2.57 | 2.57 | 2.57 | — | 3.2 | 7.7 | 8.9 | 660 | 1870 | 3350 | 8.6 | 8.2 | 7.9 |
| | 20 + 20 + 25 | 2.46 | 2.46 | 3.08 | — | 3.2 | 8.0 | 8.9 | 660 | 1970 | 3350 | 9.0 | 8.7 | 8.3 |
| | 20 + 20 + 35 | 2.24 | 2.24 | 3.92 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | 20 + 20 + 50 | 1.87 | 1.87 | 4.67 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | 20 + 20 + 60 | 1.68 | 1.68 | 5.04 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | 20 + 25 + 25 | 2.34 | 2.93 | 2.93 | — | 3.2 | 8.2 | 8.9 | 660 | 2030 | 3350 | 9.3 | 8.9 | 8.5 |
| | 20 + 25 + 35 | 2.10 | 2.63 | 3.68 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | 20 + 25 + 50 | 1.77 | 2.21 | 4.42 | — | 3.2 | 8.4 | 8.9 | 660 | 210 | | | | |

Combinations

| Indoor unit combination | | Heating capacity (kW) | | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|--------|----------------------------|--------|--------|--------|---------------------|----------|------|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 3 room | 25 + 50 + 50 | 1.68 | 3.36 | 3.36 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | | 35 + 35 + 35 | 2.80 | 2.80 | 2.80 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | | 35 + 35 + 50 | 2.45 | 2.45 | 3.50 | — | 3.2 | 8.4 | 8.9 | 660 | 2100 | 3350 | 9.6 | 9.2 | 8.8 |
| | | 20 + 20 + 20 + 20 | 2.10 | 2.10 | 2.10 | 2.10 | 3.6 | 8.4 | 9.1 | 800 | 2010 | 3350 | 9.2 | 8.8 | 8.5 |
| | | 20 + 20 + 20 + 25 | 1.98 | 1.98 | 1.98 | 2.47 | 3.6 | 8.4 | 9.1 | 800 | 2010 | 3350 | 9.2 | 8.8 | 8.5 |
| | | 20 + 20 + 20 + 35 | 1.79 | 1.79 | 1.79 | 3.13 | 3.6 | 8.5 | 9.1 | 800 | 2030 | 3350 | 9.3 | 8.9 | 8.5 |
| | | 20 + 20 + 20 + 50 | 1.56 | 1.56 | 1.56 | 3.91 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 20 + 20 + 60 | 1.43 | 1.43 | 1.43 | 4.30 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 20 + 25 + 25 | 1.89 | 1.89 | 2.36 | 2.36 | 3.6 | 8.5 | 9.1 | 800 | 2030 | 3350 | 9.3 | 8.9 | 8.5 |
| | | 20 + 20 + 25 + 35 | 1.70 | 1.70 | 2.13 | 2.98 | 3.6 | 8.5 | 9.1 | 800 | 2030 | 3350 | 9.3 | 8.9 | 8.5 |
| 4 room | | 20 + 20 + 25 + 50 | 1.50 | 1.50 | 1.87 | 3.74 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 20 + 25 + 60 | 1.38 | 1.38 | 1.72 | 4.13 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 20 + 35 + 35 | 1.56 | 1.56 | 2.74 | 2.74 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 20 + 35 + 50 | 1.38 | 1.38 | 2.41 | 3.44 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 25 + 25 + 25 | 1.79 | 2.24 | 2.24 | 2.24 | 3.6 | 8.5 | 9.1 | 800 | 2030 | 3350 | 9.3 | 8.9 | 8.5 |
| | | 20 + 25 + 25 + 35 | 1.64 | 2.05 | 2.05 | 2.87 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 25 + 25 + 50 | 1.43 | 1.79 | 1.79 | 3.58 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 25 + 35 + 35 | 1.50 | 1.87 | 2.62 | 2.62 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| | | 20 + 35 + 35 + 35 | 1.38 | 2.41 | 2.41 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 | |
| | | 25 + 25 + 25 + 25 | 2.13 | 2.13 | 2.13 | 2.13 | 3.6 | 8.5 | 9.1 | 800 | 2030 | 3350 | 9.3 | 8.9 | 8.5 |
| | | 25 + 25 + 25 + 35 | 1.95 | 1.95 | 2.74 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 | |
| | | 25 + 25 + 25 + 50 | 1.72 | 1.72 | 3.44 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 | |
| | | 25 + 25 + 35 + 35 | 1.79 | 1.79 | 2.51 | 2.51 | 3.6 | 8.6 | 9.1 | 800 | 2050 | 3350 | 9.4 | 9.0 | 8.6 |
| Indoor unit combination | | Cooling capacity (kW) | | | | | | | Power consumption (W) | | | Standard current (A) | | | |
| | | Room cooling capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 1 room | 20 | 2.0 | — | — | — | 1.8 | 2.0 | 2.7 | 480 | 530 | 950 | 2.4 | 2.3 | 2.2 |
| | | 25 | 2.5 | — | — | — | 1.8 | 2.5 | 3.2 | 480 | 730 | 1080 | 3.4 | 3.2 | 3.1 |
| | | 35 | 3.5 | — | — | — | 1.8 | 3.5 | 3.7 | 480 | 1120 | 1240 | 5.1 | 4.9 | 4.7 |
| | | 50 | 5.0 | — | — | — | 1.8 | 5.0 | 5.8 | 480 | 1710 | 2100 | 7.9 | 7.5 | 7.2 |
| | | 60 | 6.0 | — | — | — | 1.8 | 6.0 | 6.7 | 480 | 2140 | 2700 | 9.8 | 9.4 | 9.0 |
| | | 20 + 20 | 2.00 | 2.00 | — | — | 3.0 | 4.0 | 5.8 | 550 | 930 | 1910 | 4.3 | 4.1 | 3.9 |
| | | 20 + 25 | 2.00 | 2.50 | — | — | 3.0 | 4.5 | 6.1 | 550 | 1170 | 2060 | 5.4 | 5.1 | 4.9 |
| | | 20 + 35 | 2.00 | 3.50 | — | — | 3.0 | 5.5 | 6.6 | 550 | 1590 | 2320 | 7.3 | 7.0 | 6.7 |
| | | 20 + 50 | 1.94 | 4.86 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 20 + 60 | 1.70 | 5.10 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| 3 room | | 25 + 25 | 2.50 | 2.50 | — | — | 3.0 | 5.0 | 6.5 | 550 | 1360 | 2270 | 6.2 | 6.0 | 5.7 |
| | | 25 + 35 | 2.46 | 3.44 | — | — | 3.0 | 5.9 | 6.8 | 550 | 1780 | 2470 | 8.2 | 7.8 | 7.5 |
| | | 25 + 50 | 2.27 | 4.53 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 25 + 60 | 2.00 | 4.80 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 35 + 35 | 3.40 | 3.40 | — | — | 3.0 | 6.8 | 7.2 | 550 | 2150 | 2680 | 9.9 | 9.4 | 9.0 |
| | | 35 + 50 | 2.80 | 4.00 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 35 + 60 | 2.51 | 4.29 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 50 + 50 | 3.40 | 3.40 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 50 + 60 | 3.09 | 3.71 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| | | 60 + 60 | 3.40 | 3.40 | — | — | 3.0 | 6.8 | 7.3 | 550 | 2150 | 2750 | 9.9 | 9.4 | 9.0 |
| 4 room | | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | — | 3.7 | 6.0 | 7.8 | 670 | 1450 | 2750 | 6.7 | 6.4 | 6.1 |
| | | 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | 3.7 | 6.5 | 7.8 | 670 | 1630 | 2750 | 7.5 | 7.2 | 6.9 |
| | | 20 + 20 + 35 | 1.84 | 1.84 | 3.22 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 20 + 50 | 1.53 | 1.53 | 3.83 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 20 + 60 | 1.38 | 1.38 | 4.14 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 25 + 25 | 1.94 | 2.43 | 2.43 | — | 3.7 | 6.8 | 7.8 | 670 | 1820 | 2750 | 8.4 | 8.0 | 7.7 |
| | | 20 + 25 + 35 | 1.73 | 2.16 | 3.02 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 25 + 50 | 1.45 | 1.82 | 3.63 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 25 + 60 | 1.31 | 1.64 | 3.94 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 35 + 35 | 1.53 | 2.68 | 2.68 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 35 + 50 | 1.31 | 2.30 | 3.29 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 35 + 60 | 1.20 | 2.10 | 3.60 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 50 + 50 | 1.15 | 2.88 | 2.88 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 25 + 25 | 2.30 | 2.30 | 2.30 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 25 + 35 | 2.03 | 2.03 | 2.84 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 25 + 50 | 1.73 | 1.73 | 3.45 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 25 + 60 | 1.57 | 1.57 | 3.76 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 35 + 35 | 1.82 | 2.54 | 2.54 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 35 + 50 | 1.57 | 2.20 | 3.14 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 35 + 60 | 1.44 | 2.01 | 3.45 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 25 + 50 + 50 | 1.38 | 2.76 | 2.76 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 35 + 35 + 35 | 2.30 | 2.30 | 2.30 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 35 + 35 + 50 | 2.01 | 2.01 | 2.88 | — | 3.7 | 6.9 | 7.8 | 670 | 1910 | 2750 | 8.8 | 8.4 | 8.0 |
| | | 20 + 20 + 20 + 20 | 1.73 | 1.73 | 1.73 | 4.4 | 6.9 | 8.3 | 890 | 1750 | 2750 | 8.0 | 7.7 | 7.4 | |
| | | 20 + 20 + 20 + 25 | 1.62 | 1.62 | 1.62 | 2.03 | 6.9 | 8.3 | 890 | 1750 | 2750 | 8.0 | 7.7 | 7.4 | |
| | | 20 + 20 + 20 + 35 | 1.49 | 1.49 | 1.49 | 2.62 | 4.4 | 7.1 | 8.3 | 890 | 1790 | 2750 | 8.2 | 7.9 | 7.5 |
| | | 20 + 20 + 20 + 50 | 1.29 | 1.29 | 3.23 | 4.4 | 7.1 | 8.3 | 890 | 1790 | 2750 | 8.2 | | | |

INVERTER MULTI-SPLIT SYSTEM

SCM80ZJ-S1 Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|----------|------|----------------------|------|------|------|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | Min. | Standard | | | | | | | |
| 1 room | 20 | 3.0 | — | — | — | 1.5 | 3.0 | 3.7 | 600 | 840 | 1330 | 3.9 | 3.7 | 3.5 |
| | 25 | 3.4 | — | — | — | 1.5 | 3.4 | 4.2 | 600 | 1000 | 1510 | 4.6 | 4.4 | 4.2 |
| | 35 | 4.5 | — | — | — | 1.5 | 4.5 | 5.0 | 600 | 1330 | 1790 | 6.1 | 5.8 | 5.6 |
| | 50 | 5.8 | — | — | — | 1.5 | 5.8 | 6.5 | 600 | 1780 | 2310 | 8.2 | 7.8 | 7.5 |
| | 60 | 6.8 | — | — | — | 1.5 | 6.8 | 7.5 | 600 | 2100 | 2660 | 9.6 | 9.2 | 8.8 |
| 2 room | 20 + 20 | 2.70 | 2.70 | — | — | 2.1 | 5.4 | 7.4 | 630 | 1340 | 1870 | 6.2 | 5.9 | 5.6 |
| | 20 + 25 | 2.62 | 3.28 | — | — | 2.1 | 5.9 | 7.7 | 630 | 1530 | 2130 | 7.0 | 6.7 | 6.4 |
| | 20 + 35 | 2.51 | 4.39 | — | — | 2.1 | 6.9 | 8.3 | 630 | 1910 | 2650 | 8.8 | 8.4 | 8.0 |
| | 20 + 50 | 2.37 | 5.93 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 20 + 60 | 2.08 | 6.23 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 25 + 25 | 3.20 | 3.20 | — | — | 2.1 | 6.4 | 8.1 | 630 | 1700 | 2480 | 7.8 | 7.5 | 7.2 |
| | 25 + 35 | 3.08 | 4.32 | — | — | 2.1 | 7.4 | 8.6 | 630 | 2090 | 2910 | 9.6 | 9.2 | 8.8 |
| | 25 + 50 | 2.77 | 5.53 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 25 + 60 | 2.44 | 5.86 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 35 + 35 | 4.15 | 4.15 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 35 + 50 | 3.42 | 4.88 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| 3 room | 35 + 60 | 3.06 | 5.24 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 50 + 50 | 4.15 | 4.15 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 50 + 60 | 3.77 | 4.53 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 60 + 60 | 4.15 | 4.15 | — | — | 2.1 | 8.3 | 8.8 | 630 | 2460 | 3430 | 11.3 | 10.8 | 10.4 |
| | 20 + 20 + 20 | 2.57 | 2.57 | 2.57 | — | 3.2 | 7.7 | 9.3 | 660 | 1830 | 3430 | 8.4 | 8.0 | 7.7 |
| | 20 + 20 + 25 | 2.46 | 2.46 | 3.08 | — | 3.2 | 8.0 | 9.3 | 660 | 1930 | 3430 | 8.9 | 8.5 | 8.1 |
| | 20 + 20 + 35 | 2.27 | 2.27 | 3.97 | — | 3.2 | 8.5 | 9.3 | 660 | 2090 | 3430 | 9.6 | 9.2 | 8.8 |
| | 20 + 20 + 50 | 2.00 | 2.00 | 5.00 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 20 + 60 | 1.80 | 1.80 | 5.40 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 25 + 25 | 2.34 | 2.93 | 2.93 | — | 3.2 | 8.2 | 9.3 | 660 | 1990 | 3430 | 9.1 | 8.7 | 8.4 |
| | 20 + 25 + 35 | 2.20 | 2.75 | 3.85 | — | 3.2 | 8.8 | 9.3 | 660 | 2180 | 3430 | 10.0 | 9.6 | 9.2 |
| | 20 + 25 + 50 | 1.89 | 2.37 | 4.74 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 25 + 60 | 1.71 | 2.14 | 5.14 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 35 + 35 | 2.00 | 3.50 | 3.50 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 35 + 50 | 1.71 | 3.00 | 4.29 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 35 + 60 | 1.57 | 2.74 | 4.70 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| 4 room | 20 + 50 + 50 | 1.50 | 3.75 | 3.75 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 50 + 60 | 1.38 | 3.46 | 4.15 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 25 + 25 | 2.83 | 2.83 | 2.83 | — | 3.2 | 8.5 | 9.3 | 660 | 2090 | 3430 | 9.6 | 9.2 | 8.8 |
| | 25 + 25 + 35 | 2.65 | 2.65 | 3.71 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 25 + 50 | 2.25 | 2.25 | 4.50 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 25 + 60 | 2.05 | 2.05 | 4.91 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 35 + 35 | 2.37 | 3.32 | 3.32 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 35 + 50 | 2.05 | 2.86 | 4.09 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 35 + 60 | 1.88 | 2.63 | 4.50 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 50 + 50 | 1.80 | 3.60 | 3.60 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 25 + 50 + 60 | 1.67 | 3.33 | 4.00 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| Cooling operation | 35 + 35 + 35 | 3.00 | 3.00 | 3.00 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 35 + 35 + 50 | 2.63 | 2.63 | 3.75 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 35 + 35 + 60 | 2.42 | 2.42 | 4.15 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 35 + 50 + 50 | 2.33 | 3.33 | 3.33 | — | 3.2 | 9.0 | 9.3 | 660 | 2250 | 3430 | 10.3 | 9.9 | 9.5 |
| | 20 + 20 + 20 + 20 | 2.28 | 2.28 | 2.28 | 2.28 | 3.6 | 9.1 | 9.8 | 800 | 2220 | 3430 | 10.2 | 9.7 | 9.3 |
| | 20 + 20 + 20 + 25 | 2.14 | 2.14 | 2.68 | 3.6 | 9.1 | 9.8 | 9.8 | 800 | 2220 | 3430 | 10.2 | 9.7 | 9.3 |
| | 20 + 20 + 20 + 35 | 1.94 | 1.94 | 3.39 | 3.6 | 9.2 | 9.8 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 20 + 20 + 50 | 1.67 | 1.67 | 4.18 | 3.6 | 9.2 | 9.8 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 20 + 20 + 60 | 1.55 | 1.55 | 4.65 | 3.6 | 9.3 | 9.8 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 20 + 25 + 25 | 2.04 | 2.04 | 2.56 | 2.56 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 20 + 25 + 35 | 1.84 | 1.84 | 2.30 | 3.22 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 20 + 25 + 50 | 1.62 | 1.62 | 2.02 | 4.04 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 20 + 25 + 60 | 1.49 | 1.49 | 1.86 | 4.46 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 20 + 35 + 35 | 1.67 | 1.67 | 2.93 | 2.93 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 20 + 35 + 50 | 1.49 | 1.49 | 2.60 | 3.72 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 20 + 35 + 60 | 1.38 | 1.38 | 2.41 | 4.13 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| Cooling operation | 20 + 25 + 25 + 25 | 1.94 | 1.94 | 2.42 | 2.42 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 25 + 25 + 35 | 1.75 | 2.19 | 2.19 | 3.07 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 20 + 25 + 25 + 50 | 1.55 | 1.94 | 1.94 | 3.88 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 25 + 25 + 60 | 1.43 | 1.79 | 1.79 | 4.29 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 25 + 35 + 35 | 1.62 | 2.02 | 2.83 | 2.83 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 25 + 35 + 50 | 1.43 | 1.79 | 2.50 | 3.58 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 20 + 35 + 35 + 35 | 1.49 | 2.60 | 2.60 | 2.60 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 25 + 25 + 25 + 25 | 2.30 | 2.30 | 2.30 | 2.30 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 25 + 25 + 25 + 35 | 2.09 | 2.09 | 2.93 | 2.93 | 3.6 | 9.2 | 9.8 | 800 | 2240 | 3430 | 10.3 | 9.8 | 9.4 |
| | 25 + 25 + 25 + 50 | 1.86 | 1.86 | 1.86 | 3.72 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 25 + 25 + 25 + 60 | 1.72 | 1.72 | 1.72 | 4.13 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 25 + 25 + 35 + 35 | 1.94 | 1.94 | 2.71 | 2.71 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 25 + 25 + 35 + 50 | 1.72 | 1.72 | 2.41 | 3.44 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |
| | 25 + 35 + 35 + 35 | 1.79 | 2.50 | 2.50 | 2.50 | 3.6 | 9.3 | 9.8 | 800 | 2260 | 3430 | 10.4 | 10.0 | 9.5 |

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| Room cooling capacity (kW) | | | | Total capacity (kW) | | Min. | Standard | Max. | 220V | 230V | 240V |
| A room | B room | C room | D room | Min. | Standard | Max. |
<tbl_info

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | |
|-------------------------|--------|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|----------|------|----------------------|------|------|------|-----|
| | | Room cooling capacity (kW) | | | | Total capacity (kW) | | Min. | Standard | Max. | 220V | 230V | 240V | | |
| | | A room | B room | C room | D room | Min. | Standard | | | | | | | | |
| Cooling operation | 2 room | 25 + 60 | 2.18 | 5.22 | — | — | 3.0 | 7.4 | 7.9 | 550 | 2290 | 2830 | 10.5 | 10.1 | 9.6 |
| | | 35 + 35 | 3.45 | 3.45 | — | — | 3.0 | 6.9 | 7.6 | 550 | 2070 | 2680 | 9.5 | 9.1 | 8.7 |
| | | 35 + 50 | 3.05 | 4.35 | — | — | 3.0 | 7.4 | 7.9 | 550 | 2290 | 2830 | 10.5 | 10.1 | 9.6 |
| | | 35 + 60 | 2.73 | 4.67 | — | — | 3.0 | 7.4 | 7.9 | 550 | 2290 | 2830 | 10.5 | 10.1 | 9.6 |
| | | 50 + 50 | 3.70 | 3.70 | — | — | 3.0 | 7.4 | 7.9 | 550 | 2290 | 2830 | 10.5 | 10.1 | 9.6 |
| | | 50 + 60 | 3.36 | 4.04 | — | — | 3.0 | 7.4 | 7.9 | 550 | 2290 | 2830 | 10.5 | 10.1 | 9.6 |
| | 3 room | 60 + 60 | 3.70 | 3.70 | — | — | 3.0 | 7.4 | 7.9 | 550 | 2290 | 2830 | 10.5 | 10.1 | 9.6 |
| | | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | — | 3.7 | 6.0 | 8.5 | 670 | 1380 | 2830 | 6.3 | 6.1 | 5.8 |
| | | 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | 3.7 | 6.5 | 8.5 | 670 | 1560 | 2830 | 7.2 | 6.9 | 6.6 |
| | | 20 + 20 + 35 | 1.89 | 1.89 | 3.31 | — | 3.7 | 7.1 | 8.5 | 670 | 1880 | 2830 | 8.6 | 8.3 | 7.9 |
| | 4 room | 20 + 20 + 50 | 1.73 | 1.73 | 4.33 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 20 + 60 | 1.56 | 1.56 | 4.68 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 25 + 25 | 1.94 | 2.43 | 2.43 | — | 3.7 | 6.8 | 8.5 | 670 | 1740 | 2830 | 8.0 | 7.6 | 7.3 |
| | | 20 + 25 + 35 | 1.88 | 2.34 | 3.28 | — | 3.7 | 7.5 | 8.5 | 670 | 2050 | 2830 | 9.4 | 9.0 | 8.6 |
| | | 20 + 25 + 50 | 1.64 | 2.05 | 4.11 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 25 + 60 | 1.49 | 1.86 | 4.46 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 35 + 35 | 1.73 | 3.03 | 3.03 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 35 + 50 | 1.49 | 2.60 | 3.71 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 35 + 60 | 1.36 | 2.37 | 4.07 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 50 + 50 | 1.30 | 3.25 | 3.25 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 20 + 50 + 60 | 1.20 | 3.00 | 3.60 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 25 + 25 | 2.37 | 2.37 | 2.37 | — | 3.7 | 7.1 | 8.5 | 670 | 1880 | 2830 | 8.6 | 8.3 | 7.9 |
| | | 25 + 25 + 35 | 2.29 | 2.29 | 3.21 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 25 + 50 | 1.95 | 1.95 | 3.90 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 25 + 60 | 1.77 | 1.77 | 4.25 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 35 + 35 | 2.05 | 2.87 | 2.87 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 35 + 50 | 1.77 | 2.48 | 3.55 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 35 + 60 | 1.63 | 2.28 | 3.90 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 50 + 50 | 1.56 | 3.12 | 3.12 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 25 + 50 + 60 | 1.44 | 2.89 | 3.47 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 35 + 35 + 35 | 2.60 | 2.60 | 2.60 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 35 + 35 + 50 | 2.28 | 2.28 | 3.25 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 35 + 35 + 60 | 2.10 | 2.10 | 3.60 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | | 35 + 50 + 50 | 2.02 | 2.89 | 2.89 | — | 3.7 | 7.8 | 8.5 | 670 | 2230 | 2830 | 10.2 | 9.8 | 9.4 |
| | 4 room | 20 + 20 + 20 + 20 | 1.95 | 1.95 | 1.95 | 4.4 | 4.4 | 7.8 | 9.2 | 890 | 2120 | 2830 | 9.6 | 9.2 | 8.8 |
| | | 20 + 20 + 20 + 25 | 1.84 | 1.84 | 2.29 | 4.4 | 4.4 | 7.8 | 9.2 | 890 | 2120 | 2830 | 9.6 | 9.2 | 8.8 |
| | | 20 + 20 + 20 + 35 | 1.66 | 1.66 | 2.91 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 20 + 20 + 50 | 1.44 | 1.44 | 3.59 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 20 + 20 + 60 | 1.33 | 1.33 | 4.00 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 20 + 25 + 25 | 1.76 | 1.76 | 2.19 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 20 + 25 + 35 | 1.58 | 1.98 | 2.77 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 20 + 25 + 50 | 1.37 | 1.37 | 3.43 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 20 + 25 + 60 | 1.28 | 1.28 | 3.84 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 20 + 35 + 35 | 1.44 | 1.44 | 2.51 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 20 + 35 + 50 | 1.28 | 1.28 | 3.20 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 20 + 35 + 60 | 1.19 | 1.19 | 3.56 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 25 + 25 + 25 | 1.66 | 2.08 | 2.08 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 25 + 25 + 35 | 1.50 | 1.88 | 1.88 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 25 + 25 + 50 | 1.33 | 1.67 | 3.33 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 25 + 25 + 60 | 1.23 | 1.54 | 3.69 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 25 + 35 + 35 | 1.37 | 1.72 | 2.40 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 20 + 25 + 35 + 50 | 1.23 | 1.54 | 2.15 | 3.08 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 20 + 35 + 35 + 35 | 1.28 | 2.24 | 2.24 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 25 + 25 + 25 + 25 | 1.98 | 1.98 | 1.98 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 25 + 25 + 25 + 35 | 1.80 | 1.80 | 2.51 | 4.4 | 4.4 | 7.9 | 9.2 | 890 | 2140 | 2830 | 9.7 | 9.3 | 8.9 |
| | | 25 + 25 + 25 + 50 | 1.60 | 1.60 | 3.20 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 25 + 25 + 25 + 60 | 1.48 | 1.48 | 3.56 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 25 + 25 + 35 + 35 | 1.67 | 1.67 | 2.33 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 25 + 25 + 35 + 50 | 1.48 | 1.48 | 2.07 | 2.96 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |
| | | 25 + 35 + 35 + 35 | 1.54 | 2.15 | 2.15 | 4.4 | 4.4 | 8.0 | 9.2 | 890 | 2160 | 2830 | 9.9 | 9.4 | 9.0 |

Heating operation

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|----|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|----------|------|----------------------|------|------|-----|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | Min. | Standard | | | | | | | |
| 1 room | 20 | 3.0 | — | — | — | 1.5 | 3.0 | 3.5 | 600 | 1060 | 1330 | 4.9 | 4.7 | 4.5 |
| | 25 | 3.4 | — | — | — | 1.5 | 3.4 | 4.0 | 600 | 1220 | 1510 | 5.6 | 5.4 | 5.1 |
| | 35 | 4.5 | — | — | — | 1.5 | 4.5 | 4.8 | 600 | 1510 | 1790 | 6.9 | 6.6 | 6.4 |
| | 50 | 5.8 | — | — | — | 1.5 | 5.8 | 6.2 | 600 | 1950 | 2310 | 9.0 | 8.6 | 8.2 |
| | 60 | | | | | | | | | | | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|----------|------|----------------------|------|------|------|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | Min. | Standard | | | | | | | |
| 3 room | 20 + 20 + 35 | 2.27 | 2.27 | 3.97 | — | 3.2 | 8.5 | 9.1 | 660 | 2130 | 3430 | 9.8 | 9.4 | 9.0 |
| | 20 + 20 + 50 | 2.00 | 2.00 | 5.00 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 20 + 60 | 1.80 | 1.80 | 5.40 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 25 + 25 | 2.34 | 2.93 | 2.93 | — | 3.2 | 8.2 | 9.1 | 660 | 2030 | 3430 | 9.3 | 8.9 | 8.5 |
| | 20 + 25 + 35 | 2.20 | 2.75 | 3.85 | — | 3.2 | 8.8 | 9.1 | 660 | 2220 | 3430 | 10.2 | 9.7 | 9.3 |
| | 20 + 25 + 50 | 1.89 | 2.37 | 4.74 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 25 + 60 | 1.71 | 2.14 | 5.14 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 35 + 35 | 2.00 | 3.50 | 3.50 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 35 + 50 | 1.71 | 3.00 | 4.29 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 35 + 60 | 1.57 | 2.74 | 4.70 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 50 + 50 | 1.50 | 3.75 | 3.75 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 20 + 50 + 60 | 1.38 | 3.46 | 4.15 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 25 + 25 | 2.83 | 2.83 | 2.83 | — | 3.2 | 8.5 | 9.1 | 660 | 2130 | 3430 | 9.8 | 9.4 | 9.0 |
| | 25 + 25 + 35 | 2.65 | 2.65 | 3.71 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 25 + 50 | 2.25 | 2.25 | 4.50 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 25 + 60 | 2.05 | 2.05 | 4.91 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 35 + 35 | 2.37 | 3.32 | 3.32 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 35 + 50 | 2.05 | 2.86 | 4.09 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 35 + 60 | 1.88 | 2.63 | 4.50 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 50 + 50 | 1.80 | 3.60 | 3.60 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 25 + 50 + 60 | 1.67 | 3.33 | 4.00 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 35 + 35 + 35 | 3.00 | 3.00 | 3.00 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 35 + 35 + 50 | 2.63 | 2.63 | 3.75 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 35 + 35 + 60 | 2.42 | 2.42 | 4.15 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| | 35 + 50 + 50 | 2.33 | 3.33 | 3.33 | — | 3.2 | 9.0 | 9.1 | 660 | 2300 | 3430 | 10.6 | 10.1 | 9.7 |
| 4 room | 20 + 20 + 20 + 20 | 2.28 | 2.28 | 2.28 | 3.6 | 9.1 | 9.5 | 800 | 2270 | 3430 | 10.4 | 10.0 | 9.6 | |
| | 20 + 20 + 20 + 25 | 2.14 | 2.14 | 2.68 | 3.6 | 9.1 | 9.5 | 800 | 2270 | 3430 | 10.4 | 10.0 | 9.6 | |
| | 20 + 20 + 20 + 35 | 1.94 | 1.94 | 3.39 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 | |
| | 20 + 20 + 20 + 50 | 1.67 | 1.67 | 4.18 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 | |
| | 20 + 20 + 20 + 60 | 1.55 | 1.55 | 4.65 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 | |
| | 20 + 20 + 25 + 25 | 2.04 | 2.04 | 2.56 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 | |
| | 20 + 20 + 25 + 35 | 1.84 | 1.84 | 2.30 | 3.22 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 |
| | 20 + 20 + 25 + 50 | 1.62 | 1.62 | 2.02 | 4.04 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 20 + 25 + 60 | 1.49 | 1.49 | 1.86 | 4.46 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 20 + 35 + 35 | 1.67 | 1.67 | 2.93 | 2.93 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 |
| | 20 + 20 + 35 + 50 | 1.49 | 1.49 | 2.60 | 3.72 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 20 + 35 + 60 | 1.38 | 1.38 | 2.41 | 4.13 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 25 + 25 | 1.94 | 2.42 | 2.42 | 2.42 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 |
| | 20 + 25 + 25 + 35 | 1.75 | 2.19 | 2.19 | 3.07 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 |
| | 20 + 25 + 25 + 50 | 1.55 | 1.94 | 1.94 | 3.88 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 25 + 60 | 1.43 | 1.79 | 1.79 | 4.29 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 35 + 35 | 1.62 | 2.02 | 2.83 | 2.83 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 35 + 50 | 1.43 | 1.79 | 2.50 | 3.58 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 35 + 60 | 1.38 | 1.38 | 2.41 | 4.13 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 50 + 50 | 1.94 | 2.42 | 2.42 | 2.42 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 |
| | 20 + 25 + 50 + 60 | 1.72 | 1.72 | 1.72 | 4.13 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 25 + 25 + 25 + 35 | 1.94 | 1.94 | 2.71 | 2.71 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 25 + 25 + 25 + 50 | 1.72 | 1.72 | 2.41 | 3.44 | 3.6 | 9.3 | 9.5 | 800 | 2310 | 3430 | 10.7 | 10.2 | 9.8 |
| | 25 + 25 + 25 + 60 | 1.59 | 2.50 | 2.50 | 3.00 | 3.6 | 9.2 | 9.5 | 800 | 2290 | 3430 | 10.5 | 10.1 | 9.6 |
| Cooling operation | 20 + 20 + 20 | 2.00 | 2.00 | — | — | 3.0 | 4.0 | 5.8 | 550 | 930 | 1910 | 4.3 | 4.1 | 3.9 |
| | 20 + 25 | 2.00 | 2.50 | — | — | 3.0 | 4.5 | 6.1 | 550 | 1170 | 2060 | 5.4 | 5.1 | 4.9 |
| | 20 + 35 | 2.00 | 3.50 | — | — | 3.0 | 5.5 | 6.6 | 550 | 1590 | 2320 | 7.3 | 7.0 | 6.7 |
| | 20 + 50 | 1.97 | 4.93 | — | — | 3.0 | 6.9 | 7.5 | 550 | 2200 | 2830 | 10.1 | 9.7 | 9.3 |
| | 20 + 60 | 1.85 | 5.55 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 25 + 25 | 2.50 | 2.50 | — | — | 3.0 | 5.0 | 6.5 | 550 | 1360 | 2270 | 6.2 | 6.0 | 5.7 |
| | 25 + 35 | 2.46 | 3.44 | — | — | 3.0 | 5.9 | 6.8 | 550 | 1780 | 2470 | 8.2 | 7.8 | 7.5 |
| | 25 + 50 | 2.47 | 4.93 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 25 + 60 | 2.18 | 5.22 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 35 + 35 | 3.45 | 3.45 | — | — | 3.0 | 6.9 | 7.5 | 550 | 2200 | 2680 | 10.1 | 9.7 | 9.3 |
| | 35 + 50 | 3.05 | 4.35 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 35 + 60 | 2.73 | 4.67 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 50 + 50 | 3.70 | 3.70 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 50 + 60 | 3.36 | 4.04 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 60 + 60 | 3.70 | 3.70 | — | — | 3.0 | 7.4 | 7.5 | 550 | 2430 | 2830 | 11.2 | 10.7 | 10.2 |
| | 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | — | 3.7 | 6.0 | 8.1 | 670 | 1450 | 2830 | 6.7 | 6.4 | 6.1 |
| | 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | 3.7 | 6.5 | 8.1 | 670 | 1630 | 2830 | 7.5 | 7.2 | 6.9 |
| | 20 + 20 + 35 | 1.89 | 1.89 | 3.31 | — | 3.7 | 7.1 | 8.1 | 670 | 1950 | 2830 | 9.0 | 8.6 | 8.2 |
| | 20 + 20 + 50 | 1.73 | 1.73 | 4.33 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 20 + 20 + 60 | 1.56 | 1.56 | 4.68 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 25 | 1.94 | 2.43 | 2.43 | — | 3.7 | 6.8 | 8.1 | 670 | 1820 | 2830 | 8.4 | 8.0 | 7.7 |
| | 20 + 25 + 35 | 1.88 | 2.34 | 3.28 | — | 3.7 | 7.5 | 8.1 | 670 | 2130 | 2830 | 9.8 | 9.4 | 9.0 |
| | 20 + 25 + 50 | 1.64 | 2.05 | 4.11 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 60 | 1.49 | 1.86 | 4.46 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 20 + 35 + 35 | 1.73 | 3.03 | 3.03 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 20 + 35 + 50 | 1.49 | 2.60 | 3.71 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 20 + 3 | | | | | | | | | | | | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | |
|-------------------------|--------|----------------------------|--------|--------|--------|---------------------|----------|-----------------------|------|----------|----------------------|------|------|------|-----|
| | | Room cooling capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | Min. | Standard | Max. | | | | | | | |
| Cooling operation | 3 room | 25 + 25 + 35 | 2.29 | 2.29 | 3.21 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 25 + 50 | 1.95 | 1.95 | 3.90 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 25 + 60 | 1.77 | 1.77 | 4.25 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 35 + 35 | 2.05 | 2.87 | 2.87 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 35 + 50 | 1.77 | 2.48 | 3.55 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 35 + 60 | 1.63 | 2.28 | 3.90 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 50 + 50 | 1.56 | 3.12 | 3.12 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 25 + 50 + 60 | 1.44 | 2.89 | 3.47 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 35 + 35 + 35 | 2.60 | 2.60 | 2.60 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 35 + 35 + 50 | 2.28 | 2.28 | 3.25 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | 4 room | 35 + 35 + 60 | 2.10 | 2.10 | 3.60 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 35 + 50 + 50 | 2.02 | 2.89 | 2.89 | — | 3.7 | 7.8 | 8.1 | 670 | 2320 | 2830 | 10.7 | 10.2 | 9.8 |
| | | 20 + 20 + 20 + 20 | 1.95 | 1.95 | 1.95 | 4.4 | 7.8 | 8.7 | 890 | 2180 | 2830 | 9.9 | 9.5 | 9.1 | |
| | | 20 + 20 + 20 + 25 | 1.84 | 1.84 | 2.29 | 4.4 | 7.8 | 8.7 | 890 | 2180 | 2830 | 9.9 | 9.5 | 9.1 | |
| | | 20 + 20 + 20 + 35 | 1.66 | 1.66 | 2.91 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 | |
| | | 20 + 20 + 20 + 50 | 1.44 | 1.44 | 3.59 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 | |
| | | 20 + 20 + 20 + 60 | 1.33 | 1.33 | 4.00 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 | |
| | | 20 + 20 + 25 + 25 | 1.76 | 1.76 | 2.19 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 | |
| | | 20 + 20 + 25 + 35 | 1.58 | 1.58 | 1.98 | 2.77 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 20 + 20 + 25 + 50 | 1.37 | 1.37 | 1.72 | 3.43 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 20 + 20 + 25 + 60 | 1.28 | 1.28 | 1.60 | 3.84 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 20 + 20 + 35 + 35 | 1.44 | 1.44 | 2.51 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 | |
| | | 20 + 20 + 35 + 50 | 1.28 | 1.28 | 2.24 | 3.20 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 20 + 20 + 35 + 60 | 1.19 | 1.19 | 2.07 | 3.56 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 20 + 25 + 25 + 25 | 1.66 | 2.08 | 2.08 | 4.08 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 20 + 25 + 25 + 35 | 1.50 | 1.88 | 1.88 | 2.63 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 20 + 25 + 25 + 50 | 1.33 | 1.67 | 1.67 | 3.33 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 20 + 25 + 25 + 60 | 1.23 | 1.54 | 1.54 | 3.69 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 20 + 25 + 35 + 35 | 1.37 | 1.72 | 2.40 | 4.40 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 20 + 25 + 35 + 50 | 1.23 | 1.54 | 2.15 | 3.08 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 20 + 35 + 35 + 35 | 1.28 | 2.24 | 2.24 | 2.24 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 25 + 25 + 25 + 25 | 1.98 | 1.98 | 1.98 | 1.98 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 25 + 25 + 25 + 35 | 1.80 | 1.80 | 1.80 | 2.51 | 4.4 | 7.9 | 8.7 | 890 | 2200 | 2830 | 10.0 | 9.6 | 9.2 |
| | | 25 + 25 + 25 + 50 | 1.60 | 1.60 | 1.60 | 3.20 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 25 + 25 + 25 + 60 | 1.48 | 1.48 | 1.48 | 3.56 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 25 + 25 + 35 + 35 | 1.67 | 1.67 | 2.33 | 2.33 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 25 + 25 + 35 + 50 | 1.48 | 1.48 | 2.07 | 2.96 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |
| | | 25 + 35 + 35 + 35 | 1.54 | 2.15 | 2.15 | 2.15 | 4.4 | 8.0 | 8.7 | 890 | 2220 | 2830 | 10.1 | 9.7 | 9.3 |

SCM100ZJ-S1 Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|--------|----------------------------|--------|--------|--------|---------------------|--------|-----------------------|----------|----------|----------------------|------|------|------|------|------|
| | | Room heating capacity (kW) | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | |
| Heating operation | 1 room | 20 | 3.0 | — | — | — | — | 1.5 | 3.0 | 3.7 | 700 | 1010 | 1330 | 4.6 | 4.4 | 4.3 |
| | | 25 | 3.4 | — | — | — | — | 1.5 | 3.4 | 4.2 | 700 | 1150 | 1540 | 5.3 | 5.1 | 4.8 |
| | | 35 | 4.5 | — | — | — | — | 1.5 | 4.5 | 5.0 | 700 | 1540 | 1840 | 7.1 | 6.8 | 6.5 |
| | | 50 | 5.8 | — | — | — | — | 1.5 | 5.8 | 6.5 | 700 | 2000 | 2410 | 9.2 | 8.8 | 8.4 |
| | | 20 + 20 | 3.00 | 3.00 | — | — | — | 2.1 | 6.0 | 7.4 | 750 | 1510 | 1460 | 6.9 | 6.6 | 6.4 |
| | 2 room | 20 + 25 | 2.84 | 3.56 | — | — | — | 2.1 | 6.4 | 7.9 | 750 | 1630 | 2210 | 7.5 | 7.2 | 6.9 |
| | | 20 + 35 | 2.73 | 4.77 | — | — | — | 2.1 | 7.5 | 8.7 | 750 | 1950 | 2520 | 9.0 | 8.6 | 8.2 |
| | | 20 + 50 | 2.51 | 6.29 | — | — | — | 2.1 | 8.8 | 10.2 | 750 | 2380 | 3220 | 10.9 | 10.5 | 10.0 |
| | | 20 + 60 | 2.45 | 7.35 | — | — | — | 2.1 | 9.8 | 11.2 | 750 | 2780 | 3620 | 12.8 | 12.2 | 11.7 |
| | | 25 + 25 | 3.40 | 3.40 | — | — | — | 2.1 | 6.8 | 8.4 | 750 | 1740 | 2420 | 8.0 | 7.6 | 7.3 |
| | | 25 + 35 | 3.29 | 4.61 | — | — | — | 2.1 | 7.9 | 9.2 | 750 | 2100 | 2820 | 9.6 | 9.2 | 8.8 |
| | | 25 + 50 | 3.07 | 6.13 | — | — | — | 2.1 | 9.2 | 10.7 | 750 | 2580 | 3610 | 11.8 | 11.3 | 10.9 |
| | | 25 + 60 | 3.00 | 7.20 | — | — | — | 2.1 | 10.2 | 11.7 | 750 | 2980 | 3790 | 13.7 | 13.1 | 12.5 |
| | | 35 + 35 | 4.50 | 4.50 | — | — | — | 2.1 | 9.0 | 10.0 | 750 | 2470 | 3210 | 11.3 | 10.8 | 10.4 |
| | | 35 + 50 | 4.24 | 6.06 | — | — | — | 2.1 | 10.3 | 11.5 | 750 | 2980 | 3710 | 13.7 | 13.1 | 12.5 |
| | 3 room | 35 + 60 | 4.16 | 7.14 | — | — | — | 2.1 | 11.3 | 12.5 | 750 | 3430 | 4100 | 15.7 | 15.1 | 14.4 |
| | | 50 + 50 | 5.80 | 5.80 | — | — | — | 2.1 | 11.6 | 13.0 | 750 | 3580 | 4320 | 16.4 | 15.7 | 15.1 |
| | | 50 + 60 | 5.45 | 6.55 | — | — | — | 2.1 | 12.0 | 13.5 | 750 | 3720 | 4520 | 17.1 | 16.3 | 15.7 |
| | | 60 + 60 | 6.00 | 6.00 | — | — | — | 2.1 | 12.0 | 13.5 | 750 | 3720 | 4520 | 17.1 | 16.3 | 15.7 |
| | | 20 + 20 + 20 | 3.00 | 3.00 | 3.00 | — | — | 3.2 | 9.0 | 11.1 | 780 | 2230 | 3350 | 10.2 | 9.8 | 9.4 |
| | | 20 + 20 + 25 | 2.89 | 3.62 | — | — | — | 3.2 | 9.4 | 11.6 | 780 | 2350 | 3550 | 10.8 | 10.3 | 9.9 |
| | | 20 + 20 + 35 | 2.80 | 2.80 | 4.90 | — | — | 3.2 | 10.5 | 12.4 | 780 | 2710 | 3820 | 12.4 | 11.9 | 11.4 |
| | | 20 + 20 + 50 | 2.62 | 2.62 | 6.56 | — | — | 3.2 | 11.8 | 13.5 | 780 | 3210 | 4190 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 60 | 2.40 | 2.40 | 7.20 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3350 | 4190 | 15.4 | 14.7 | 14.1 |
| | | 20 + 25 + 25 | 2.80 | 3.50 | 3.50 | — | — | | | | | | | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|--------|------|------|
| | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | | |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | | |
| 3 room | 35 + 35 + 50 | 3.50 | 3.50 | 5.00 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3340 | 4190 | 15.3 | 14.7 | 14.1 | |
| | 35 + 35 + 60 | 3.23 | 3.23 | 5.54 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3340 | 4190 | 15.3 | 14.7 | 14.1 | |
| | 35 + 50 + 50 | 3.11 | 4.44 | 4.44 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3330 | 4190 | 15.3 | 14.6 | 14.0 | |
| | 35 + 50 + 60 | 2.90 | 4.14 | 4.97 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3330 | 4190 | 15.3 | 14.6 | 14.0 | |
| | 35 + 60 + 60 | 2.71 | 4.65 | 4.65 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3320 | 4190 | 15.2 | 14.6 | 14.0 | |
| | 50 + 50 + 50 | 4.00 | 4.00 | 4.00 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3330 | 4190 | 15.3 | 14.6 | 14.0 | |
| 4 room | 50 + 50 + 60 | 3.75 | 3.75 | 4.50 | — | — | 3.2 | 12.0 | 13.5 | 780 | 3320 | 4190 | 15.2 | 14.6 | 14.0 | |
| | 20 + 20 + 20 + 20 | 3.00 | 3.00 | 3.00 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3230 | 3840 | 14.7 | 14.1 | 13.5 | |
| | 20 + 20 + 20 + 25 | 2.82 | 2.82 | 3.53 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3230 | 3840 | 14.7 | 14.1 | 13.5 | |
| | 20 + 20 + 20 + 35 | 2.53 | 2.53 | 4.42 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3230 | 3840 | 14.7 | 14.1 | 13.5 | |
| | 20 + 20 + 20 + 50 | 2.18 | 2.18 | 5.45 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 20 + 20 + 60 | 2.00 | 2.00 | 6.00 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 20 + 25 + 25 | 2.67 | 2.67 | 3.33 | 3.33 | — | 3.6 | 12.0 | 13.5 | 950 | 3230 | 3840 | 14.7 | 14.1 | 13.5 | |
| | 20 + 20 + 25 + 35 | 2.40 | 2.40 | 3.00 | 4.20 | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 20 + 25 + 50 | 2.09 | 2.09 | 2.61 | 5.22 | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 20 + 25 + 60 | 1.92 | 1.92 | 2.40 | 5.76 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 20 + 20 + 35 + 35 | 2.18 | 2.18 | 3.82 | 3.82 | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 20 + 35 + 50 | 1.92 | 1.92 | 3.36 | 4.80 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 20 + 20 + 35 + 60 | 1.78 | 1.78 | 3.11 | 5.33 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 20 + 20 + 50 + 50 | 1.71 | 1.71 | 4.29 | 4.29 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 20 + 20 + 50 + 60 | 1.60 | 1.60 | 4.00 | 4.80 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 20 + 20 + 60 + 60 | 1.50 | 1.50 | 4.50 | 4.50 | — | 3.6 | 12.0 | 13.5 | 950 | 3200 | 3840 | 14.6 | 13.9 | 13.3 | |
| | 20 + 25 + 25 + 25 | 2.53 | 3.16 | 3.16 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3230 | 3840 | 14.7 | 14.1 | 13.5 | |
| | 20 + 25 + 25 + 35 | 2.29 | 2.86 | 4.00 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 25 + 25 + 50 | 2.00 | 2.50 | 5.00 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 25 + 25 + 60 | 1.85 | 2.31 | 2.31 | 5.54 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 20 + 25 + 35 + 35 | 2.09 | 2.61 | 3.65 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 20 + 25 + 35 + 50 | 1.85 | 2.31 | 3.23 | 4.62 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 20 + 25 + 35 + 60 | 1.71 | 2.14 | 3.00 | 5.14 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 20 + 25 + 50 + 50 | 1.66 | 2.07 | 4.14 | 4.14 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 20 + 25 + 50 + 60 | 1.55 | 1.94 | 3.87 | 4.65 | — | 3.6 | 12.0 | 13.5 | 950 | 3200 | 3840 | 14.6 | 13.9 | 13.3 | |
| | 20 + 35 + 35 + 35 | 1.92 | 3.36 | 3.36 | 3.36 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 20 + 35 + 50 + 50 | 1.71 | 3.00 | 3.00 | 4.29 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 20 + 35 + 50 + 60 | 1.60 | 2.80 | 2.80 | 4.80 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 25 + 25 + 25 + 25 | 3.00 | 3.00 | 3.00 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 25 + 25 + 25 + 35 | 2.73 | 2.73 | 3.82 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 25 + 25 + 25 + 50 | 2.40 | 2.40 | 2.40 | 4.80 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 25 + 25 + 25 + 60 | 2.22 | 2.22 | 2.22 | 5.33 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 25 + 25 + 35 + 35 | 2.50 | 2.50 | 3.50 | 3.50 | — | 3.6 | 12.0 | 13.5 | 950 | 3220 | 3840 | 14.7 | 14.0 | 13.4 | |
| | 25 + 25 + 35 + 50 | 2.22 | 2.22 | 3.11 | 4.44 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 25 + 25 + 35 + 60 | 2.07 | 2.07 | 2.90 | 4.97 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 25 + 25 + 50 + 50 | 2.00 | 2.00 | 4.00 | 4.00 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 25 + 25 + 50 + 60 | 1.88 | 1.88 | 3.75 | 4.50 | — | 3.6 | 12.0 | 13.5 | 950 | 3200 | 3840 | 14.6 | 13.9 | 13.3 | |
| | 25 + 35 + 35 + 35 | 2.31 | 3.23 | 3.23 | 3.23 | — | 3.6 | 12.0 | 13.5 | 950 | 3340 | 3840 | 15.2 | 14.5 | 13.9 | |
| | 25 + 35 + 35 + 50 | 2.07 | 2.90 | 2.90 | 4.14 | — | 3.6 | 12.0 | 13.5 | 950 | 3210 | 3840 | 14.6 | 14.0 | 13.4 | |
| | 25 + 35 + 35 + 60 | 1.94 | 2.71 | 2.71 | 4.65 | — | 3.6 | 12.0 | 13.5 | 950 | 3200 | 3840 | 14.6 | 13.9 | 13.3 | |
| | 35 + 35 + 35 + 35 | 2.71 | 2.71 | 3.87 | — | — | 3.6 | 12.0 | 13.5 | 950 | 3200 | 3840 | 14.6 | 13.9 | 13.3 | |
| 5 room | 20 + 20 + 20 + 20 + 20 | 2.40 | 2.40 | 2.40 | 2.40 | — | 4.0 | 12.0 | 13.5 | 1050 | 2930 | 3400 | 13.3 | 12.8 | 12.2 | |
| | 20 + 20 + 20 + 20 + 25 | 2.29 | 2.29 | 2.29 | 2.86 | — | 4.0 | 12.0 | 13.5 | 1050 | 2920 | 3400 | 13.3 | 12.7 | 12.2 | |
| | 20 + 20 + 20 + 20 + 35 | 2.09 | 2.09 | 2.09 | 3.65 | — | 4.0 | 12.0 | 13.5 | 1050 | 2920 | 3400 | 13.3 | 12.7 | 12.2 | |
| | 20 + 20 + 20 + 20 + 50 | 1.85 | 1.85 | 1.85 | 4.62 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 | |
| | 20 + 20 + 20 + 20 + 60 | 1.71 | 1.71 | 1.71 | 5.14 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 | |
| | 20 + 20 + 20 + 25 + 25 | 2.18 | 2.18 | 2.18 | 2.73 | 2.73 | — | 4.0 | 12.0 | 13.5 | 1050 | 2920 | 3400 | 13.3 | 12.7 | 12.2 |
| | 20 + 20 + 20 + 25 + 35 | 2.00 | 2.00 | 2.00 | 2.50 | 3.50 | — | 4.0 | 12.0 | 13.5 | 1050 | 2920 | 3400 | 13.3 | 12.7 | 12.2 |
| | 20 + 20 + 20 + 25 + 50 | 1.78 | 1.78 | 1.78 | 2.22 | 4.44 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 |
| | 20 + 20 + 20 + 25 + 60 | 1.66 | 1.66 | 1.66 | 2.07 | 4.97 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 |
| | 20 + 20 + 20 + 35 + 35 | 1.85 | 1.85 | 3.23 | 3.23 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 | |
| | 20 + 20 + 20 + 35 + 50 | 1.66 | 1.66 | 1.66 | 2.90 | 4.14 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 |
| | 20 + 20 + 20 + 35 + 60 | 1.55 | 1.55 | 1.55 | 2.71 | 4.65 | — | 4.0 | 12.0 | 13.5 | 1050 | 2900 | 3400 | 13.2 | 12.6 | 12.1 |
| | 20 + 20 + 20 + 50 + 50 | 1.50 | 1.50 | 1.50 | 3.75 | — | 4.0 | 12.0 | 13.5 | 1050 | 2900 | 3400 | 13.2 | 12.6 | 12.1 | |
| | 20 + 20 + 20 + 50 + 60 | 1.50 | 1.50 | 1.50 | 3.75 | 3.75 | — | 4.0 | 12.0 | 13.5 | 1050 | 2900 | 3400 | 13.2 | 12.6 | 12.1 |
| | 20 + 20 + 35 + 35 + 35 | 1.66 | 1.66 | 2.90 | 2.90 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 | |
| | 20 + 20 + 35 + 35 + 50 | 1.50 | 1.50 | 2.63 | 2.63 | 3.75 | — | 4.0 | 12.0 | 13.5 | 1050 | 2900 | 3400 | 13.2 | 12.6 | 12.1 |
| | 20 + 25 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | 4.0 | 12.0 | 13.5 | 1050 | 2920 | 3400 | 13.3 | 12.7 | 12.2 | |
| | 20 + 25 + 25 + 25 + 35 | 1.85 | 2.31 | 2.31 | 2.31 | 3.23 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 |
| | 20 + 25 + 25 + 25 + 50 | 1.66 | 2.07 | 2.07 | 2.07 | 4.14 | — | 4.0 | 12.0 | 13.5 | 1050 | 2910 | 3400 | 13.2 | 12.7 | 12.1 |
| | 20 + 25 + 25 + 25 + 60 | 1.55 | 1.94 | 1.94 | 1.94 | 4.65 | — | 4.0 | 12.0 | 13.5 | 1050 | 2900 | 3400 | 13.2</ | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|----------|----------------------|----------|------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. |
| 1 room | 20 | 2.0 | — | — | — | — | — | 1.8 | 2.0 | 2.8 | 650 | 750 | 1100 |
| | 25 | 2.5 | — | — | — | — | — | 1.8 | 2.5 | 3.4 | 650 | 950 | 1350 |
| | 35 | 3.5 | — | — | — | — | — | 1.8 | 3.5 | 3.9 | 650 | 1400 | 1600 |
| | 50 | 5.0 | — | — | — | — | — | 1.8 | 5.0 | 6.1 | 650 | 2000 | 2500 |
| | 60 | 6.0 | — | — | — | — | — | 1.8 | 6.0 | 7.0 | 650 | 2450 | 3000 |
| | 20 + 20 | 2.00 | 2.00 | — | — | — | — | 3.0 | 4.0 | 5.6 | 740 | 910 | 1460 |
| | 20 + 25 | 2.00 | 2.50 | — | — | — | — | 3.0 | 4.5 | 6.2 | 740 | 1050 | 1820 |
| | 20 + 35 | 2.00 | 3.50 | — | — | — | — | 3.0 | 5.5 | 6.7 | 740 | 1430 | 2020 |
| | 20 + 50 | 2.00 | 5.00 | — | — | — | — | 3.0 | 7.0 | 8.9 | 740 | 2180 | 2820 |
| | 20 + 60 | 2.00 | 6.00 | — | — | — | — | 3.0 | 8.0 | 9.8 | 740 | 2530 | 3360 |
| 2 room | 25 + 25 | 2.50 | 2.50 | — | — | — | — | 3.0 | 5.0 | 6.8 | 740 | 1350 | 2200 |
| | 25 + 35 | 2.50 | 3.50 | — | — | — | — | 3.0 | 6.0 | 7.3 | 740 | 1720 | 2320 |
| | 25 + 50 | 2.50 | 5.00 | — | — | — | — | 3.0 | 7.5 | 9.5 | 740 | 2350 | 3220 |
| | 25 + 60 | 2.50 | 6.00 | — | — | — | — | 3.0 | 8.5 | 9.8 | 740 | 2680 | 3360 |
| | 35 + 35 | 3.50 | 3.50 | — | — | — | — | 3.0 | 7.0 | 7.8 | 740 | 2180 | 2820 |
| | 35 + 50 | 3.50 | 5.00 | — | — | — | — | 3.0 | 8.5 | 10.0 | 740 | 2680 | 3620 |
| | 35 + 60 | 3.50 | 6.00 | — | — | — | — | 3.0 | 9.5 | 10.9 | 740 | 3120 | 3990 |
| | 50 + 50 | 5.00 | 5.00 | — | — | — | — | 3.0 | 10.0 | 12.0 | 740 | 3350 | 4400 |
| | 50 + 60 | 4.55 | 5.45 | — | — | — | — | 3.0 | 10.0 | 12.0 | 740 | 3350 | 4400 |
| | 60 + 60 | 5.00 | 5.00 | — | — | — | — | 3.0 | 10.0 | 12.0 | 740 | 3340 | 4400 |
| 3 room | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | — | — | — | 3.7 | 6.0 | 8.4 | 880 | 1460 | 2560 |
| | 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | — | — | 3.7 | 6.5 | 9.0 | 880 | 1650 | 2700 |
| | 20 + 20 + 35 | 2.00 | 2.00 | 3.50 | — | — | — | 3.7 | 7.5 | 9.5 | 880 | 1980 | 3120 |
| | 20 + 20 + 50 | 2.00 | 2.00 | 5.00 | — | — | — | 3.7 | 9.0 | 11.7 | 880 | 2600 | 4120 |
| | 20 + 20 + 60 | 2.00 | 2.00 | 6.00 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3120 | 4250 |
| | 20 + 25 + 25 | 2.00 | 2.50 | 2.50 | — | — | — | 3.7 | 7.0 | 9.6 | 880 | 1850 | 3210 |
| | 20 + 25 + 35 | 2.00 | 2.50 | 3.50 | — | — | — | 3.7 | 8.0 | 10.1 | 880 | 2320 | 3630 |
| | 20 + 25 + 50 | 2.00 | 2.50 | 5.00 | — | — | — | 3.7 | 9.5 | 12.0 | 880 | 2980 | 4250 |
| | 20 + 25 + 60 | 1.90 | 2.38 | 5.71 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3120 | 4250 |
| | 20 + 35 + 35 | 2.00 | 3.50 | 3.50 | — | — | — | 3.7 | 9.0 | 10.6 | 880 | 2780 | 3750 |
| | 20 + 35 + 50 | 1.90 | 3.33 | 4.76 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3120 | 4250 |
| | 20 + 35 + 60 | 1.74 | 3.04 | 5.22 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 20 + 50 + 50 | 1.67 | 4.17 | 4.17 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 20 + 50 + 60 | 1.54 | 3.85 | 4.62 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 20 + 60 + 60 | 1.43 | 4.29 | 4.29 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3100 | 4250 |
| | 25 + 25 + 25 | 2.50 | 2.50 | 2.50 | — | — | — | 3.7 | 7.5 | 10.2 | 880 | 2030 | 3640 |
| | 25 + 25 + 35 | 2.50 | 2.50 | 3.50 | — | — | — | 3.7 | 8.5 | 10.7 | 880 | 2520 | 3900 |
| | 25 + 25 + 50 | 2.50 | 2.50 | 5.00 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3120 | 4250 |
| | 25 + 25 + 60 | 2.27 | 2.27 | 5.45 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3120 | 4250 |
| 4 room | 25 + 35 + 35 | 2.50 | 3.50 | 3.50 | — | — | — | 3.7 | 9.5 | 11.2 | 880 | 2980 | 3990 |
| | 25 + 35 + 50 | 2.27 | 3.18 | 4.55 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3120 | 4250 |
| | 25 + 35 + 60 | 2.08 | 2.92 | 5.00 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 25 + 50 + 50 | 2.00 | 4.00 | 4.00 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 25 + 50 + 60 | 1.85 | 3.70 | 4.44 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3100 | 4250 |
| | 25 + 60 + 60 | 1.72 | 4.14 | 4.14 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3100 | 4250 |
| | 35 + 35 + 35 | 3.33 | 3.33 | 3.33 | — | — | — | 3.7 | 10.0 | 11.7 | 880 | 3120 | 4180 |
| | 35 + 35 + 50 | 2.92 | 2.92 | 4.17 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 35 + 35 + 60 | 2.69 | 2.69 | 4.62 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3110 | 4250 |
| | 35 + 50 + 50 | 2.59 | 3.70 | 3.70 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3100 | 4250 |
| | 35 + 50 + 60 | 2.41 | 3.45 | 4.14 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3100 | 4251 |
| | 35 + 60 + 60 | 2.26 | 3.87 | 3.87 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3090 | 4251 |
| | 50 + 50 + 50 | 3.33 | 3.33 | 3.33 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3100 | 4250 |
| | 50 + 50 + 60 | 3.13 | 3.13 | 3.75 | — | — | — | 3.7 | 10.0 | 12.0 | 880 | 3090 | 4250 |
| | 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | — | — | 4.4 | 8.0 | 11.2 | 1100 | 2050 | 3680 |
| | 20 + 20 + 20 + 25 | 2.00 | 2.00 | 2.00 | 2.50 | — | — | 4.4 | 8.5 | 11.8 | 1100 | 2320 | 3890 |
| | 20 + 20 + 20 + 35 | 2.00 | 2.00 | 2.00 | 3.50 | — | — | 4.4 | 9.5 | 12.0 | 1100 | 2820 | 4050 |
| | 20 + 20 + 20 + 50 | 1.82 | 1.82 | 1.82 | 4.55 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3020 | 4050 |
| | 20 + 20 + 20 + 60 | 1.67 | 1.67 | 1.67 | 5.00 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3020 | 4050 |
| | 20 + 20 + 25 + 25 | 2.00 | 2.00 | 2.50 | 2.50 | — | — | 4.4 | 9.0 | 12.0 | 1100 | 2520 | 4050 |
| | 20 + 20 + 25 + 35 | 2.00 | 2.00 | 2.50 | 3.50 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3030 | 4050 |
| | 20 + 20 + 25 + 50 | 1.74 | 1.74 | 2.17 | 4.35 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3020 | 4050 |
| | 20 + 20 + 25 + 60 | 1.60 | 1.60 | 2.00 | 4.80 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 20 + 35 + 35 | 1.82 | 1.82 | 3.18 | 3.18 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3020 | 4050 |
| | 20 + 20 + 35 + 50 | 1.60 | 1.60 | 2.80 | 4.00 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 20 + 35 + 60 | 1.48 | 1.48 | 2.59 | 4.44 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 20 + 50 + 50 | 1.43 | 1.43 | 3.57 | 3.57 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 20 + 50 + 60 | 1.33 | 1.33 | 3.33 | 4.00 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 |
| | 20 + 20 + 60 + 60 | 1.25 | 1.25 | 3.75 | 3.75 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 2990 | 4050 |
| | 20 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 9.5 | 12.0 | 1100 | 2820 | 4050 |
| | 20 + 25 + 25 + 35 | 1.90 | 2.38 | 2.38 | 3.33 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3030 | 4050 |
| | 20 + 25 + 25 + 50 | 1.67 | 2.08 | 2.08 | 4.17 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3020 | 4050 |
| | 20 + 25 + 35 + 35 | 1.74 | 2.17 | 3.04 | 3.04 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3020 | 4050 |
| | 20 + 25 + 35 + 50 | 1.54 | 1.92 | 2.69 | 3.85 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 25 + 35 + 60 | 1.43 | 1.79 | 2.50 | 4.29 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 25 + 50 + 50 | 1.38 | 1.72 | 3.45 | 3.45 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 |
| | 20 + 25 + 50 + 60 | 1.29 | 1.61 | 3.23 | 3.87 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 |
| | 20 + 25 + 60 + 60 | 1.21 | 1.52 | 3.64 | 3.64 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 2990 | 4050 |
| | 20 + 35 + 35 + 35 | 1.60 | 2.80 | 2.80 | 2.80 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 35 + 35 + 50 | 1.43 | 2.50 | 2.50 | 3.57 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 |
| | 20 + 35 + 35 + 60 | 1.33 | 2.33 | 2.33 | 4.00 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 |
| | 20 + 35 + 50 + 50 | 1.29 | 2.26 | 3.23 | 3.23 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 |
| | 25 + 25 + 25 + 25 | 2.50 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3030 | 4050 |
| | 25 + 25 + 25 + 35 | 2.27 | 2.27 | 2.27 | 3.18 | — | — | 4.4 | 10.0 | 12.0</td | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | |
| 4 room | 25 + 35 + 35 + 60 | 1.61 | 2.26 | 2.26 | 3.87 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 | 13.7 | 13.1 | 12.5 |
| | 25 + 35 + 50 + 50 | 1.56 | 2.19 | 3.13 | 3.13 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 2990 | 4050 | 13.6 | 13.0 | 12.5 |
| | 35 + 35 + 35 + 35 | 2.50 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3010 | 4050 | 13.7 | 13.1 | 12.6 |
| | 35 + 35 + 35 + 50 | 2.26 | 2.26 | 2.26 | 3.23 | — | — | 4.4 | 10.0 | 12.0 | 1100 | 3000 | 4050 | 13.7 | 13.1 | 12.5 |
| | 20 + 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | — | 5.1 | 10.0 | 12.0 | 1210 | 2860 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 20 + 20 + 25 | 1.90 | 1.90 | 1.90 | 1.90 | 2.38 | — | 5.1 | 10.0 | 12.0 | 1210 | 2860 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 20 + 20 + 35 | 1.74 | 1.74 | 1.74 | 3.04 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2850 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 20 + 20 + 50 | 1.54 | 1.54 | 1.54 | 3.85 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 20 + 20 + 60 | 1.43 | 1.43 | 1.43 | 4.29 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 20 + 25 + 25 | 1.82 | 1.82 | 2.27 | 2.27 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2860 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 20 + 25 + 35 | 1.67 | 1.67 | 2.08 | 2.92 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2850 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 20 + 25 + 50 | 1.48 | 1.48 | 1.85 | 3.70 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 20 + 25 + 60 | 1.38 | 1.38 | 1.38 | 4.14 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 20 + 35 + 35 | 1.54 | 1.54 | 1.54 | 2.69 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 20 + 35 + 50 | 1.38 | 1.38 | 2.41 | 3.45 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 20 + 35 + 60 | 1.29 | 1.29 | 2.26 | 3.87 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 20 + 20 + 20 + 50 + 50 | 1.25 | 1.25 | 1.25 | 3.13 | 3.13 | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 20 + 20 + 25 + 25 + 25 | 1.74 | 1.74 | 2.17 | 2.17 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2850 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 25 + 25 + 35 | 1.60 | 1.60 | 2.00 | 2.80 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2850 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 20 + 25 + 25 + 50 | 1.43 | 1.43 | 1.79 | 3.57 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 25 + 25 + 60 | 1.33 | 1.33 | 1.67 | 4.00 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 25 + 35 + 35 | 1.48 | 1.48 | 1.85 | 2.59 | 2.59 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 25 + 35 + 50 | 1.33 | 1.33 | 1.67 | 2.33 | 3.33 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 25 + 35 + 60 | 1.25 | 1.25 | 1.56 | 2.19 | 3.75 | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 20 + 20 + 35 + 35 + 35 | 1.38 | 1.38 | 2.41 | 2.41 | 2.41 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 20 + 35 + 35 + 50 | 1.25 | 1.25 | 2.19 | 2.19 | 3.13 | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 20 + 25 + 25 + 25 + 25 | 1.67 | 2.08 | 2.08 | 2.08 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2850 | 4030 | 13.0 | 12.4 | 11.9 |
| | 20 + 25 + 25 + 25 + 35 | 1.54 | 1.92 | 1.92 | 2.69 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 25 + 25 + 25 + 50 | 1.38 | 1.72 | 1.72 | 3.45 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 25 + 25 + 35 + 35 | 1.43 | 1.79 | 1.79 | 2.50 | 2.50 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 25 + 25 + 35 + 50 | 1.29 | 1.61 | 1.61 | 2.26 | 3.23 | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 20 + 25 + 35 + 35 + 35 | 1.33 | 1.67 | 2.33 | 2.33 | 2.33 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 20 + 25 + 35 + 35 + 50 | 1.25 | 2.19 | 2.19 | 2.19 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 25 + 25 + 25 + 25 + 25 | 2.00 | 2.00 | 2.00 | 2.00 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2850 | 4030 | 13.0 | 12.4 | 11.9 |
| | 25 + 25 + 25 + 25 + 35 | 1.85 | 1.85 | 1.85 | 2.59 | 2.59 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 25 + 25 + 25 + 25 + 50 | 1.67 | 1.67 | 1.67 | 3.33 | 3.33 | — | 5.1 | 10.0 | 12.0 | 1210 | 2840 | 4030 | 12.9 | 12.4 | 11.8 |
| | 25 + 25 + 25 + 35 + 35 | 1.56 | 1.56 | 1.56 | 3.75 | — | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 25 + 25 + 25 + 35 + 50 | 1.56 | 1.56 | 1.56 | 2.19 | 3.13 | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |
| | 25 + 25 + 35 + 35 + 35 | 1.61 | 1.61 | 2.26 | 2.26 | 2.26 | — | 5.1 | 10.0 | 12.0 | 1210 | 2830 | 4030 | 12.9 | 12.3 | 11.8 |

SCM100ZJ-S1 Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|---------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | |
| 1 room | 20 | 3.0 | — | — | — | — | — | 1.5 | 3.0 | 3.6 | 700 | 1220 | 1330 | 5.6 | 5.4 | 5.1 |
| | 25 | 3.4 | — | — | — | — | — | 1.5 | 3.4 | 4.1 | 700 | 1265 | 1540 | 5.8 | 5.6 | 5.3 |
| | 35 | 4.5 | — | — | — | — | — | 1.5 | 4.5 | 4.9 | 700 | 1650 | 1840 | 7.6 | 7.2 | 6.9 |
| | 50 | 5.8 | — | — | — | — | — | 1.5 | 5.8 | 6.4 | 700 | 2120 | 2410 | 9.7 | 9.3 | 8.9 |
| | 60 | 6.8 | — | — | — | — | — | 1.5 | 6.8 | 7.4 | 700 | 2500 | 2760 | 11.5 | 11.0 | 10.5 |
| | 71 | 8.0 | — | — | — | — | — | 1.5 | 8.0 | 8.1 | 700 | 3020 | 3090 | 13.9 | 13.3 | 12.7 |
| | 20 + 20 | 3.00 | 3.00 | — | — | — | — | 2.1 | 6.0 | 7.2 | 750 | 1540 | 1860 | 7.1 | 6.8 | 6.5 |
| | 20 + 25 | 2.84 | 3.56 | — | — | — | — | 2.1 | 6.4 | 7.7 | 750 | 1660 | 2210 | 7.6 | 7.3 | 7.0 |
| | 20 + 35 | 2.73 | 4.77 | — | — | — | — | 2.1 | 7.5 | 8.5 | 750 | 1990 | 2520 | 9.1 | 8.7 | 8.4 |
| | 20 + 50 | 2.51 | 6.29 | — | — | — | — | 2.1 | 8.8 | 10.0 | 750 | 2430 | 3220 | 11.2 | 10.7 | 10.2 |
| | 20 + 60 | 2.45 | 7.35 | — | — | — | — | 2.1 | 9.8 | 11.0 | 750 | 2840 | 3620 | 13.0 | 12.5 | 12.0 |
| | 20 + 71 | 2.42 | 8.58 | — | — | — | — | 2.1 | 11.0 | 11.6 | 750 | 2840 | 3620 | 13.0 | 12.5 | 12.0 |
| | 25 + 25 | 3.40 | 3.40 | — | — | — | — | 2.1 | 6.8 | 8.2 | 750 | 1770 | 2420 | 8.1 | 7.8 | 7.4 |
| | 25 + 35 | 3.29 | 4.61 | — | — | — | — | 2.1 | 7.9 | 9.0 | 750 | 2140 | 2820 | 9.8 | 9.4 | 9.0 |
| | 25 + 50 | 3.07 | 6.13 | — | — | — | — | 2.1 | 9.2 | 10.5 | 750 | 2630 | 3610 | 12.1 | 11.6 | 11.1 |
| | 25 + 60 | 3.00 | 7.20 | — | — | — | — | 2.1 | 10.2 | 11.5 | 750 | 3040 | 3790 | 14.0 | 13.4 | 12.8 |
| | 25 + 71 | 2.97 | 8.43 | — | — | — | — | 2.1 | 11.4 | 12.1 | 750 | 3440 | 4250 | 15.8 | 15.1 | 14.5 |
| | 35 + 35 | 4.50 | 4.50 | — | — | — | — | 2.1 | 9.0 | 9.8 | 750 | 2520 | 3210 | 11.6 | 11.1 | 10.6 |
| | 35 + 50 | 4.24 | 6.06 | — | — | — | — | 2.1 | 10.3 | 11.3 | 750 | 3040 | 3710 | 14.0 | 13.4 | 12.8 |
| | 35 + 60 | 4.16 | 7.14 | — | — | — | — | 2.1 | 11.3 | 12.3 | 750 | 3420 | 4320 | 15.7 | 15.0 | 14.4 |
| | 35 + 71 | 3.96 | 8.04 | — | — | — | — | 2.1 | 12.0 | 12.9 | 750 | 4030 | 4690 | 18.5 | 17.7 | 17.0 |

Combinations

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|----------------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | |
| 3 room | 20 + 60 + 60 | 1.71 | 5.14 | 5.14 | — | — | — | 5.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 20 + 60 + 71 | 1.59 | 4.77 | 5.64 | — | — | — | 6.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 25 + 25 + 25 | 3.40 | 3.40 | 3.40 | — | — | — | 3.2 | 10.2 | 12.4 | 780 | 2760 | 3880 | 12.7 12.1 11.6 |
| | 25 + 25 + 35 | 3.32 | 3.32 | 4.65 | — | — | — | 3.2 | 11.3 | 13.2 | 780 | 3170 | 4120 | 14.6 13.9 13.3 |
| | 25 + 25 + 50 | 3.00 | 3.00 | 6.00 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3420 | 4290 | 15.7 15.0 14.4 |
| | 25 + 25 + 60 | 2.73 | 2.73 | 6.55 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3410 | 4290 | 15.7 15.0 14.4 |
| | 25 + 25 + 71 | 2.48 | 2.48 | 7.04 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3410 | 4290 | 15.7 15.0 14.4 |
| | 25 + 35 + 35 | 3.16 | 4.42 | 4.42 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3420 | 4290 | 15.7 15.0 14.4 |
| | 25 + 35 + 50 | 2.73 | 3.82 | 5.45 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3410 | 4290 | 15.7 15.0 14.4 |
| | 25 + 35 + 60 | 2.50 | 3.50 | 6.00 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3410 | 4290 | 15.7 15.0 14.4 |
| | 25 + 35 + 71 | 2.29 | 3.21 | 6.50 | — | — | — | 4.2 | 12.0 | 13.3 | 780 | 3400 | 4290 | 15.6 14.9 14.3 |
| | 25 + 50 + 50 | 2.40 | 4.80 | 4.80 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3410 | 4290 | 15.7 15.0 14.4 |
| | 25 + 50 + 60 | 2.22 | 4.44 | 5.33 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3400 | 4290 | 15.6 14.9 14.3 |
| | 25 + 50 + 71 | 2.05 | 4.11 | 5.84 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 25 + 60 + 60 | 2.07 | 4.97 | 4.97 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 25 + 60 + 71 | 1.92 | 4.62 | 5.46 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 35 + 35 + 35 | 4.00 | 4.00 | 4.00 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3420 | 4290 | 15.7 15.0 14.4 |
| | 35 + 35 + 50 | 3.50 | 3.50 | 5.00 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3410 | 4290 | 15.7 15.0 14.4 |
| | 35 + 35 + 60 | 3.23 | 3.23 | 5.54 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3400 | 4290 | 15.6 14.9 14.3 |
| | 35 + 35 + 71 | 2.98 | 2.98 | 6.04 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 35 + 50 + 50 | 3.11 | 4.44 | 4.44 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3400 | 4290 | 15.6 14.9 14.3 |
| | 35 + 50 + 60 | 2.90 | 4.14 | 4.97 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 35 + 50 + 71 | 2.69 | 3.85 | 5.46 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 35 + 60 + 60 | 2.71 | 4.65 | 4.65 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 50 + 50 + 50 | 4.00 | 4.00 | 4.00 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3390 | 4290 | 15.6 14.9 14.3 |
| | 50 + 50 + 60 | 3.75 | 3.75 | 4.50 | — | — | — | 3.2 | 12.0 | 13.3 | 780 | 3380 | 4290 | 15.5 14.8 14.2 |
| Heating operation | 20 + 20 + 20 + 20 | 3.00 | 3.00 | 3.00 | 3.00 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3270 | 3920 | 14.9 14.2 13.6 |
| | 20 + 20 + 20 + 25 | 2.82 | 2.82 | 2.82 | 3.53 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3270 | 3920 | 14.9 14.2 13.6 |
| | 20 + 20 + 20 + 35 | 2.53 | 2.53 | 2.53 | 4.42 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3270 | 3920 | 14.9 14.2 13.6 |
| | 20 + 20 + 20 + 50 | 2.18 | 2.18 | 5.45 | — | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 20 + 20 + 20 + 60 | 2.00 | 2.00 | 2.00 | 6.00 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 20 + 20 + 71 | 1.83 | 1.83 | 1.83 | 6.50 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.6 14.0 13.4 |
| | 20 + 20 + 25 + 25 | 2.67 | 2.67 | 3.33 | 3.33 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3270 | 3920 | 14.9 14.2 13.6 |
| | 20 + 20 + 25 + 35 | 2.40 | 2.40 | 3.00 | 4.20 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 20 + 20 + 25 + 50 | 2.09 | 2.09 | 2.61 | 5.22 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 20 + 20 + 25 + 60 | 1.92 | 1.92 | 2.40 | 5.76 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 20 + 25 + 71 | 1.76 | 1.76 | 2.21 | 6.26 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 20 + 35 + 35 | 2.18 | 2.18 | 3.82 | 3.82 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 20 + 20 + 35 + 50 | 1.92 | 1.92 | 3.36 | 4.80 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 20 + 35 + 60 | 1.78 | 1.78 | 3.11 | 5.33 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 20 + 35 + 71 | 1.64 | 1.64 | 2.88 | 5.84 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 20 + 50 + 50 | 1.71 | 1.71 | 4.29 | 4.29 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 20 + 50 + 60 | 1.60 | 1.60 | 4.00 | 4.80 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 20 + 60 + 60 | 1.50 | 1.50 | 4.50 | 4.50 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 25 + 25 + 25 | 2.53 | 3.16 | 3.16 | 3.16 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3270 | 3920 | 14.9 14.2 13.6 |
| | 20 + 25 + 25 + 35 | 2.29 | 2.86 | 2.86 | 4.00 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 20 + 25 + 25 + 50 | 2.00 | 2.50 | 2.50 | 5.00 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.2 13.6 |
| | 20 + 25 + 25 + 60 | 1.85 | 2.31 | 2.31 | 5.54 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 25 + 25 + 71 | 1.70 | 2.13 | 2.13 | 6.04 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 25 + 35 + 35 | 2.09 | 2.61 | 3.65 | 3.65 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 20 + 25 + 35 + 50 | 1.85 | 2.31 | 3.23 | 4.62 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 25 + 35 + 60 | 1.71 | 2.14 | 3.00 | 5.14 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 25 + 35 + 71 | 1.59 | 1.99 | 2.78 | 5.64 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 25 + 50 + 50 | 1.66 | 2.07 | 4.14 | 4.14 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 25 + 50 + 60 | 1.55 | 1.94 | 3.87 | 4.65 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 35 + 35 + 35 | 1.92 | 3.36 | 3.36 | 3.36 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 20 + 35 + 35 + 50 | 1.71 | 3.00 | 3.00 | 4.29 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 20 + 35 + 35 + 60 | 1.60 | 2.80 | 2.80 | 4.80 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.2 13.6 |
| | 20 + 35 + 35 + 71 | 1.55 | 2.71 | 3.87 | 3.87 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 25 + 25 + 25 + 25 | 3.00 | 3.00 | 3.00 | — | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 25 + 25 + 25 + 35 | 2.73 | 2.73 | 2.73 | 3.82 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3260 | 3920 | 14.8 14.2 13.6 |
| | 25 + 25 + 25 + 50 | 2.40 | 2.40 | 2.40 | 4.80 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 25 + 25 + 25 + 60 | 2.22 | 2.22 | 2.22 | 5.33 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 25 + 25 + 25 + 71 | 2.05 | 2.05 | 2.05 | 5.84 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 25 + 25 + 35 + 35 | 2.50 | 2.50 | 3.50 | 3.50 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 25 + 25 + 35 + 50 | 2.22 | 2.22 | 3.11 | 4.44 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3250 | 3920 | 14.8 14.1 13.6 |
| | 25 + 25 + 35 + 60 | 2.07 | 2.07 | 2.90 | 4.97 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 25 + 25 + 35 + 71 | 1.92 | 1.92 | 2.69 | 5.46 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 25 + 25 + 50 + 50 | 2.00 | 2.00 | 4.00 | 4.00 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 3920 | 14.7 14.1 13.5 |
| | 25 + 25 + 50 + 60 | 1.88 | 1.88 | 3.75 | 4.50 | — | — | 3.6 | 12.0 | 13.3 | 950 | 3240 | 39 | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-----------------------------|------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | |
| Heating operation 5 room | 20 + 20 + 25 + 25 + 50 | 1.71 | 1.71 | 2.14 | 2.14 | 4.29 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 |
| | 20 + 20 + 25 + 25 + 60 | 1.60 | 1.60 | 2.00 | 2.00 | 4.80 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| | 20 + 20 + 25 + 35 + 35 | 1.78 | 1.78 | 2.22 | 3.11 | 3.11 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 |
| | 20 + 20 + 25 + 35 + 50 | 1.60 | 1.60 | 2.00 | 2.80 | 4.00 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| | 20 + 20 + 25 + 35 + 60 | 1.50 | 1.50 | 1.88 | 2.63 | 4.50 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| | 20 + 20 + 35 + 35 + 35 | 1.66 | 1.66 | 2.90 | 2.90 | 2.90 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 |
| | 20 + 20 + 35 + 35 + 50 | 1.50 | 1.50 | 2.63 | 2.63 | 3.75 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| | 20 + 25 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | 4.0 | 12.0 | 13.3 | 1050 | 3210 | 3620 | 14.6 | 14.0 | 13.4 | |
| | 20 + 25 + 25 + 25 + 35 | 1.85 | 2.31 | 2.31 | 3.23 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 | |
| | 20 + 25 + 25 + 25 + 50 | 1.66 | 2.07 | 2.07 | 4.14 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 | |
| | 20 + 25 + 25 + 25 + 60 | 1.55 | 1.94 | 1.94 | 4.65 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 | |
| | 20 + 25 + 25 + 35 + 35 | 1.71 | 2.14 | 2.14 | 3.00 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 | |
| | 20 + 25 + 25 + 35 + 50 | 1.55 | 1.94 | 1.94 | 2.71 | 3.87 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| | 20 + 25 + 35 + 35 + 35 | 1.60 | 2.00 | 2.80 | 2.80 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 | |
| | 20 + 35 + 35 + 35 + 35 | 1.50 | 2.63 | 2.63 | 2.63 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 | |
| | 25 + 25 + 25 + 25 + 25 | 2.40 | 2.40 | 2.40 | 2.40 | — | 4.0 | 12.0 | 13.3 | 1050 | 3210 | 3620 | 14.6 | 14.0 | 13.4 | |
| | 25 + 25 + 25 + 25 + 35 | 2.22 | 2.22 | 2.22 | 3.11 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 | |
| | 25 + 25 + 25 + 25 + 50 | 2.00 | 2.00 | 2.00 | 4.00 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 | |
| | 25 + 25 + 25 + 25 + 60 | 1.88 | 1.88 | 1.88 | 4.50 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 | |
| | 25 + 25 + 25 + 35 + 35 | 2.07 | 2.07 | 2.90 | 2.90 | — | 4.0 | 12.0 | 13.3 | 1050 | 3200 | 3620 | 14.6 | 13.9 | 13.3 | |
| | 25 + 25 + 25 + 35 + 50 | 1.88 | 1.88 | 1.88 | 2.63 | 3.75 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| | 25 + 25 + 35 + 35 + 35 | 1.94 | 1.94 | 2.71 | 2.71 | 2.71 | — | 4.0 | 12.0 | 13.3 | 1050 | 3190 | 3620 | 14.5 | 13.9 | 13.3 |
| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | |
| 1 room | 20 | 2.0 | — | — | — | — | — | 1.8 | 2.0 | 2.7 | 650 | 780 | 1100 | 3.6 | 3.4 | 3.3 |
| | 25 | 2.5 | — | — | — | — | — | 1.8 | 2.5 | 3.2 | 650 | 1000 | 1350 | 4.6 | 4.4 | 4.2 |
| | 35 | 3.5 | — | — | — | — | — | 1.8 | 3.5 | 3.7 | 650 | 1500 | 1600 | 6.9 | 6.6 | 6.3 |
| | 50 | 5.0 | — | — | — | — | — | 1.8 | 5.0 | 5.8 | 650 | 2150 | 2500 | 9.9 | 9.4 | 9.0 |
| | 60 | 6.0 | — | — | — | — | — | 1.8 | 6.0 | 6.7 | 650 | 2720 | 3000 | 12.5 | 11.9 | 11.4 |
| | 71 | 7.1 | — | — | — | — | — | 1.8 | 7.1 | 7.2 | 650 | 3250 | 3080 | 14.9 | 14.3 | 13.7 |
| 2 room | 20 + 20 | 2.00 | 2.00 | — | — | — | — | 3.0 | 4.0 | 5.4 | 740 | 960 | 1460 | 4.4 | 4.2 | 4.0 |
| | 20 + 25 | 2.00 | 2.50 | — | — | — | — | 3.0 | 4.5 | 5.9 | 740 | 1100 | 1820 | 5.1 | 4.8 | 4.6 |
| | 20 + 35 | 2.00 | 3.50 | — | — | — | — | 3.0 | 5.5 | 6.4 | 740 | 1500 | 2020 | 6.9 | 6.6 | 6.3 |
| | 20 + 50 | 2.00 | 5.00 | — | — | — | — | 3.0 | 7.0 | 8.5 | 740 | 2290 | 2820 | 10.5 | 10.1 | 9.6 |
| | 20 + 60 | 2.00 | 6.00 | — | — | — | — | 3.0 | 8.0 | 9.4 | 740 | 2660 | 3360 | 12.2 | 11.7 | 11.2 |
| | 20 + 71 | 2.00 | 7.10 | — | — | — | — | 3.0 | 9.1 | 9.9 | 740 | 3100 | 3780 | 14.1 | 13.5 | 12.9 |
| | 25 + 25 | 2.50 | 2.50 | — | — | — | — | 3.0 | 5.0 | 6.8 | 740 | 1420 | 2200 | 6.5 | 6.2 | 6.0 |
| | 25 + 35 | 2.50 | 3.50 | — | — | — | — | 3.0 | 6.0 | 6.9 | 740 | 1810 | 2320 | 8.3 | 7.9 | 7.6 |
| | 25 + 50 | 2.50 | 5.00 | — | — | — | — | 3.0 | 7.5 | 9.0 | 740 | 2470 | 3220 | 11.3 | 10.8 | 10.4 |
| | 25 + 60 | 2.50 | 6.00 | — | — | — | — | 3.0 | 8.5 | 9.4 | 740 | 2810 | 3360 | 12.9 | 12.3 | 11.8 |
| | 25 + 71 | 2.53 | 7.17 | — | — | — | — | 3.0 | 9.7 | 10.4 | 740 | 3350 | 4020 | 15.4 | 14.7 | 14.1 |
| | 35 + 35 | 3.50 | 3.50 | — | — | — | — | 3.0 | 7.0 | 7.4 | 740 | 2290 | 2820 | 10.5 | 10.1 | 9.6 |
| | 35 + 50 | 3.50 | 5.00 | — | — | — | — | 3.0 | 8.5 | 9.5 | 740 | 2810 | 3620 | 12.9 | 12.3 | 11.8 |
| | 35 + 60 | 3.50 | 6.00 | — | — | — | — | 3.0 | 9.5 | 10.4 | 740 | 3280 | 3990 | 15.1 | 14.4 | 13.8 |
| | 35 + 71 | 3.30 | 6.70 | — | — | — | — | 3.0 | 10.0 | 10.9 | 740 | 3480 | 4250 | 15.8 | 15.1 | 14.5 |
| | 50 + 50 | 5.00 | 5.00 | — | — | — | — | 3.0 | 10.0 | 11.6 | 740 | 3480 | 4350 | 16.0 | 15.3 | 14.6 |
| | 50 + 60 | 4.55 | 5.45 | — | — | — | — | 3.0 | 10.0 | 11.8 | 740 | 3480 | 4410 | 16.0 | 15.3 | 14.6 |
| | 50 + 71 | 4.13 | 5.87 | — | — | — | — | 3.0 | 10.0 | 11.8 | 740 | 3470 | 4410 | 15.8 | 15.1 | 14.5 |
| | 60 + 60 | 5.00 | 5.00 | — | — | — | — | 3.0 | 10.0 | 11.8 | 740 | 3470 | 4410 | 15.9 | 15.2 | 14.6 |
| | 60 + 71 | 4.58 | 5.42 | — | — | — | — | 3.0 | 10.0 | 11.8 | 740 | 3470 | 4410 | 15.8 | 15.1 | 14.5 |
| | 71 + 71 | 5.00 | 5.00 | — | — | — | — | 3.0 | 10.0 | 11.8 | 740 | 3460 | 4410 | 15.6 | 14.9 | 14.3 |
| Cooling operation 3 room | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | — | — | — | 3.7 | 6.0 | 8.1 | 880 | 1530 | 2490 | 7.0 | 6.7 | 6.4 |
| | 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | — | — | 3.7 | 6.5 | 8.6 | 880 | 1730 | 2700 | 7.9 | 7.6 | 7.3 |
| | 20 + 20 + 35 | 2.00 | 2.00 | 3.50 | — | — | — | 3.7 | 7.5 | 9.1 | 880 | 2080 | 3120 | 9.6 | 9.1 | 8.8 |
| | 20 + 20 + 50 | 2.00 | 2.00 | 5.00 | — | — | — | 3.7 | 9.0 | 11.2 | 880 | 2730 | 4000 | 12.5 | 12.0 | 11.5 |
| | 20 + 20 + 60 | 2.00 | 2.00 | 6.00 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3280 | 4250 | 15.1 | 14.4 | 13.8 |
| | 20 + 20 + 71 | 1.80 | 1.80 | 6.40 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3280 | 4250 | 15.1 | 14.4 | 13.8 |
| | 20 + 25 + 25 | 2.00 | 2.50 | 2.50 | — | — | — | 3.7 | 7.0 | 9.1 | 880 | 1940 | 3210 | 8.9 | 8.5 | 8.2 |
| | 20 + 25 + 35 | 2.00 | 2.50 | 3.50 | — | — | — | 3.7 | 8.0 | 9.6 | 880 | 2440 | 3630 | 11.2 | 10.7 | 10.3 |
| | 20 + 25 + 50 | 2.00 | 2.50 | 5.00 | — | — | — | 3.7 | 9.5 | 11.5 | 880 | 3130 | 4120 | 14.4 | 13.7 | 13.2 |
| | 20 + 25 + 60 | 1.90 | 2.38 | 5.71 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3280 | 4250 | 15.1 | 14.4 | 13.8 |
| | 20 + 25 + 71 | 1.72 | 2.16 | 6.12 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3280 | 4250 | 15.1 | 14.4 | 13.8 |
| | 20 + 35 + 35 | 2.00 | 3.50 | 3.50 | — | — | — | 3.7 | 9.0 | 10.1 | 880 | 2920 | 3640 | 13.4 | 12.8 | 12.3 |
| | 20 + 35 + 50 | 1.90 | 3.33 | 4.76 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3280 | 4250 | 15.1 | 14.4 | 13.8 |
| | 20 + 35 + 60 | 1.74 | 3.04 | 5.22 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3280 | 4250 | 15.1 | 14.4 | 13.8 |
| | 20 + 35 + 71 | 1.59 | 2.78 | 5.63 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3270 | 4250 | 15.0 | 14.4 | 13.8 |
| | 20 + 50 + 50 | 1.67 | 4.17 | 4.17 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3270 | 4250 | 15.0 | 14.4 | 13.8 |
| | 20 + 50 + 60 | 1.54 | 3.85 | 4.62 | — | — | — | | | | | | | | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | | | |
| 3 room | 35 + 50 + 71 | 2.24 | 3.21 | 4.55 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3260 | 4250 | 15.0 | 14.3 | 13.7 |
| | 35 + 60 + 60 | 2.26 | 3.87 | 3.87 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3260 | 4250 | 15.0 | 14.3 | 13.7 |
| | 50 + 50 + 50 | 3.33 | 3.33 | 3.33 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3260 | 4250 | 15.0 | 14.3 | 13.7 |
| | 50 + 50 + 60 | 3.13 | 3.13 | 3.75 | — | — | — | 3.7 | 10.0 | 11.8 | 880 | 3260 | 4250 | 15.0 | 14.3 | 13.7 |
| | 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | — | — | 4.4 | 8.0 | 10.8 | 1100 | 2110 | 3680 | 9.6 | 9.2 | 8.8 |
| | 20 + 20 + 20 + 25 | 2.00 | 2.00 | 2.00 | 2.50 | — | — | 4.4 | 8.5 | 11.1 | 1100 | 2390 | 3890 | 10.9 | 10.4 | 10.0 |
| | 20 + 20 + 20 + 35 | 2.00 | 2.00 | 2.00 | 3.50 | — | — | 4.4 | 9.5 | 11.6 | 110 | 2900 | 3990 | 13.2 | 12.6 | 12.1 |
| | 20 + 20 + 20 + 50 | 1.82 | 1.82 | 1.82 | 4.55 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 20 + 60 | 1.67 | 1.67 | 1.67 | 5.00 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 20 + 71 | 1.53 | 1.53 | 1.53 | 5.42 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.4 | 13.8 | 13.2 |
| | 20 + 20 + 25 + 25 | 2.00 | 2.00 | 2.50 | 2.50 | — | — | 4.4 | 9.0 | 11.6 | 1100 | 2600 | 3990 | 11.8 | 11.3 | 10.8 |
| | 20 + 20 + 25 + 35 | 2.00 | 2.00 | 2.50 | 3.50 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3220 | 4050 | 14.7 | 14.0 | 13.4 |
| | 20 + 20 + 25 + 50 | 1.74 | 1.74 | 2.17 | 4.35 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 25 + 60 | 1.60 | 1.60 | 2.00 | 4.80 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 25 + 71 | 1.47 | 1.47 | 1.84 | 5.22 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 20 + 20 + 35 + 35 | 1.82 | 1.82 | 3.18 | 3.18 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 35 + 50 | 1.60 | 1.60 | 2.80 | 4.00 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 35 + 60 | 1.48 | 1.48 | 2.59 | 4.44 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 20 + 20 + 35 + 71 | 1.37 | 1.37 | 2.40 | 4.86 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 20 + 50 + 50 | 1.43 | 1.43 | 3.57 | 3.57 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 20 + 50 + 60 | 1.33 | 1.33 | 3.33 | 4.00 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 20 + 60 + 60 | 1.25 | 1.25 | 3.75 | 3.75 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3180 | 4050 | 14.5 | 13.8 | 13.3 |
| | 20 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 9.5 | 11.8 | 1100 | 2900 | 4050 | 13.2 | 12.6 | 12.1 |
| | 20 + 25 + 25 + 35 | 1.90 | 2.38 | 2.38 | 3.33 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3220 | 4050 | 14.7 | 14.0 | 13.4 |
| | 20 + 25 + 25 + 50 | 1.54 | 2.08 | 2.08 | 4.17 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 25 + 25 + 60 | 1.54 | 1.92 | 1.92 | 4.62 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 20 + 25 + 25 + 71 | 1.46 | 1.81 | 1.81 | 4.93 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 25 + 35 + 35 | 1.74 | 2.17 | 3.04 | 3.04 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 25 + 35 + 50 | 1.54 | 1.92 | 2.69 | 3.85 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 20 + 25 + 35 + 60 | 1.43 | 1.79 | 2.50 | 4.29 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 25 + 35 + 71 | 1.32 | 1.66 | 2.32 | 4.70 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 25 + 50 + 50 | 1.38 | 1.72 | 3.45 | 3.45 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 25 + 50 + 60 | 1.29 | 1.61 | 3.23 | 3.87 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 35 + 35 + 35 | 1.60 | 2.80 | 2.80 | 2.80 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 20 + 35 + 35 + 50 | 1.43 | 2.50 | 2.50 | 3.57 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 35 + 35 + 60 | 1.33 | 2.33 | 2.33 | 4.00 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 35 + 35 + 71 | 1.29 | 1.66 | 2.32 | 4.70 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 35 + 50 + 50 | 1.29 | 1.72 | 3.23 | 3.87 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 20 + 35 + 50 + 60 | 1.27 | 1.72 | 2.27 | 3.18 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 25 + 25 + 25 | 2.00 | 2.00 | 2.00 | 4.00 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 25 + 25 + 35 | 2.08 | 2.08 | 2.92 | 2.92 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 25 + 25 + 50 | 1.85 | 1.85 | 2.59 | 3.70 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 25 + 25 + 25 + 60 | 1.72 | 1.72 | 2.41 | 4.14 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 25 + 25 + 71 | 1.60 | 1.60 | 2.24 | 4.55 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 25 + 35 + 50 | 1.67 | 1.67 | 3.33 | 3.33 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 25 + 35 + 60 | 1.56 | 1.56 | 3.13 | 3.75 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3180 | 4050 | 14.5 | 13.8 | 13.3 |
| | 25 + 25 + 35 + 71 | 1.71 | 1.71 | 4.86 | 4.86 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 25 + 35 + 35 | 2.08 | 2.08 | 2.92 | 2.92 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 25 + 35 + 50 | 1.85 | 1.85 | 2.59 | 3.70 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 25 + 25 + 35 + 60 | 1.72 | 1.72 | 2.41 | 4.14 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 25 + 35 + 71 | 1.60 | 1.60 | 2.24 | 4.55 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 50 | 1.92 | 2.69 | 2.69 | 2.69 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 60 | 1.72 | 2.41 | 3.45 | 3.45 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 60 | 1.61 | 2.26 | 2.26 | 3.87 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 71 | 1.56 | 2.19 | 3.13 | 3.13 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3180 | 4050 | 14.5 | 13.8 | 13.3 |
| | 25 + 35 + 35 + 35 | 2.08 | 2.08 | 2.08 | 2.08 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 35 + 35 + 50 | 1.85 | 1.85 | 2.69 | 2.69 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 60 | 1.72 | 1.72 | 2.41 | 4.14 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 71 | 1.56 | 1.56 | 3.13 | 3.13 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 35 | 1.92 | 2.69 | 2.69 | 2.69 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 35 + 35 + 50 | 1.72 | 1.72 | 2.41 | 4.14 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | 14.6 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 60 | 1.56 | 1.56 | 3.13 | 3.13 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 71 | 1.43 | 1.43 | 3.13 | 3.13 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3190 | 4050 | 14.5 | 13.9 | 13.3 |
| | 25 + 35 + 35 + 35 | 1.92 | 2.69 | 2.69 | 2.69 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3210 | 4050 | 14.6 | 14.0 | 13.4 |
| | 25 + 35 + 35 + 50 | 1.72 | 1.72 | 2.41 | 4.14 | — | — | 4.4 | 10.0 | 11.8 | 1100 | 3200 | 4050 | | | |

INVERTER MULTI-SPLIT SYSTEM

SCM125ZJ-S1 Table of Indoor unit combination with SRK-ZJX-S/S1 type only

| Indoor unit combination | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | |
| 1 room | 20 | 3.0 | — | — | — | — | 1.5 | 3.0 | 3.7 | 700 | 1010 | 1330 | 4.6 | 4.4 | 4.3 |
| | 25 | 3.4 | — | — | — | — | 1.5 | 3.4 | 4.2 | 700 | 1150 | 1540 | 5.3 | 5.1 | 4.8 |
| | 35 | 4.5 | — | — | — | — | 1.5 | 4.5 | 5.0 | 700 | 1540 | 1840 | 7.1 | 6.8 | 6.5 |
| | 50 | 5.8 | — | — | — | — | 1.5 | 5.8 | 6.5 | 700 | 2000 | 2410 | 9.2 | 8.8 | 8.4 |
| | 60 | 6.8 | — | — | — | — | 1.5 | 6.8 | 7.5 | 700 | 2360 | 2760 | 10.8 | 10.4 | 9.9 |
| | 20 + 20 | 3.00 | 3.00 | — | — | — | 2.1 | 6.0 | 7.4 | 750 | 1510 | 1460 | 6.9 | 6.6 | 6.4 |
| 2 room | 20 + 25 | 2.84 | 3.56 | — | — | — | 2.1 | 6.4 | 7.9 | 750 | 1630 | 2210 | 7.5 | 7.2 | 6.9 |
| | 20 + 35 | 2.73 | 4.77 | — | — | — | 2.1 | 7.5 | 8.7 | 750 | 1950 | 2520 | 9.0 | 8.6 | 8.2 |
| | 20 + 50 | 2.51 | 6.29 | — | — | — | 2.1 | 8.8 | 10.2 | 750 | 2380 | 3220 | 10.9 | 10.5 | 10.0 |
| | 20 + 60 | 2.45 | 7.35 | — | — | — | 2.1 | 9.8 | 11.2 | 750 | 2780 | 3620 | 12.8 | 12.2 | 11.7 |
| | 25 + 25 | 3.40 | 3.40 | — | — | — | 2.1 | 6.8 | 8.4 | 750 | 1740 | 2420 | 8.0 | 7.6 | 7.3 |
| | 25 + 35 | 3.29 | 4.61 | — | — | — | 2.1 | 7.9 | 9.2 | 750 | 2100 | 2820 | 9.6 | 9.2 | 8.8 |
| | 25 + 50 | 3.07 | 6.13 | — | — | — | 2.1 | 9.2 | 10.7 | 750 | 2580 | 3610 | 11.8 | 11.3 | 10.9 |
| | 25 + 60 | 3.00 | 7.20 | — | — | — | 2.1 | 10.2 | 11.7 | 750 | 2980 | 3790 | 13.7 | 13.1 | 12.5 |
| | 35 + 35 | 4.50 | 4.50 | — | — | — | 2.1 | 9.0 | 10.0 | 750 | 2470 | 3210 | 11.3 | 10.8 | 10.4 |
| | 35 + 50 | 4.24 | 6.06 | — | — | — | 2.1 | 10.3 | 11.5 | 750 | 2980 | 3710 | 13.7 | 13.1 | 12.5 |
| | 35 + 60 | 4.16 | 7.14 | — | — | — | 2.1 | 11.3 | 12.5 | 750 | 3350 | 4320 | 15.4 | 14.7 | 14.1 |
| 3 room | 50 + 50 | 5.80 | 5.80 | — | — | — | 2.1 | 11.6 | 13.0 | 750 | 3590 | 4620 | 16.5 | 15.8 | 15.1 |
| | 50 + 60 | 5.73 | 6.87 | — | — | — | 2.1 | 12.6 | 14.0 | 750 | 4010 | 5230 | 18.4 | 17.6 | 16.9 |
| | 60 + 60 | 6.75 | 6.75 | — | — | — | 2.1 | 13.5 | 14.0 | 750 | 4450 | 5230 | 20.4 | 19.5 | 18.7 |
| | 20 + 20 + 20 | 3.00 | 3.00 | 3.00 | — | — | 3.2 | 9.0 | 11.1 | 780 | 2230 | 3350 | 10.2 | 9.8 | 9.4 |
| | 20 + 20 + 25 | 2.89 | 3.62 | — | — | — | 3.2 | 9.4 | 11.6 | 780 | 2350 | 3550 | 10.8 | 10.3 | 9.9 |
| | 20 + 20 + 35 | 2.80 | 2.80 | 4.90 | — | — | 3.2 | 10.5 | 12.4 | 780 | 2710 | 3820 | 12.4 | 11.9 | 11.4 |
| | 20 + 20 + 50 | 2.62 | 2.62 | 6.56 | — | — | 3.2 | 11.8 | 13.9 | 780 | 3210 | 4290 | 14.7 | 14.1 | 13.5 |
| | 20 + 20 + 60 | 2.56 | 2.56 | 7.68 | — | — | 3.2 | 12.8 | 14.0 | 780 | 3620 | 4350 | 16.6 | 15.9 | 15.2 |
| | 20 + 25 + 25 | 2.80 | 3.50 | 3.50 | — | — | 3.2 | 9.8 | 12.1 | 780 | 2510 | 3720 | 11.5 | 11.0 | 10.6 |
| | 20 + 25 + 35 | 2.73 | 3.41 | 4.77 | — | — | 3.2 | 10.9 | 12.9 | 780 | 2910 | 3990 | 13.4 | 12.8 | 12.2 |
| | 20 + 25 + 50 | 2.57 | 3.21 | 6.42 | — | — | 3.2 | 12.2 | 14.0 | 780 | 3410 | 4350 | 15.7 | 15.0 | 14.4 |
| | 20 + 25 + 60 | 2.51 | 3.14 | 7.54 | — | — | 3.2 | 13.2 | 14.0 | 780 | 3910 | 4350 | 18.0 | 17.2 | 16.5 |
| | 20 + 35 + 35 | 2.67 | 4.67 | 4.67 | — | — | 3.2 | 12.0 | 13.7 | 780 | 3390 | 4220 | 15.6 | 14.9 | 14.3 |
| | 20 + 35 + 50 | 2.53 | 4.43 | 6.33 | — | — | 3.2 | 13.3 | 14.0 | 780 | 3900 | 4350 | 17.9 | 17.1 | 16.4 |
| 4 room | 20 + 35 + 60 | 2.35 | 4.11 | 7.04 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 20 + 50 + 50 | 2.25 | 5.63 | 5.63 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 20 + 50 + 60 | 2.08 | 5.19 | 6.23 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 20 + 60 + 60 | 1.93 | 5.79 | 5.79 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 25 + 25 + 25 | 3.40 | 3.40 | 3.40 | — | — | 3.2 | 10.2 | 12.6 | 780 | 2710 | 3880 | 12.4 | 11.9 | 11.4 |
| | 25 + 25 + 35 | 3.32 | 3.32 | 4.65 | — | — | 3.2 | 11.3 | 13.4 | 780 | 3110 | 4120 | 14.3 | 13.7 | 13.1 |
| | 25 + 25 + 50 | 3.15 | 3.15 | 6.30 | — | — | 3.2 | 12.6 | 14.0 | 780 | 3620 | 4350 | 16.6 | 15.9 | 15.2 |
| | 25 + 25 + 60 | 3.07 | 3.07 | 7.36 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 25 + 35 + 35 | 3.26 | 4.57 | 4.57 | — | — | 3.2 | 12.4 | 14.0 | 780 | 3710 | 4350 | 17.0 | 16.3 | 15.6 |
| | 25 + 35 + 50 | 3.07 | 4.30 | 6.14 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4060 | 4350 | 18.6 | 17.8 | 17.1 |
| | 25 + 35 + 60 | 2.81 | 3.94 | 6.75 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4060 | 4350 | 18.6 | 17.8 | 17.1 |
| 5 room | 25 + 50 + 50 | 2.70 | 5.40 | 5.40 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 25 + 50 + 60 | 2.50 | 5.00 | 6.00 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 25 + 60 + 60 | 2.33 | 5.59 | 5.59 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 35 + 35 + 35 | 4.50 | 4.50 | 4.50 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4060 | 4350 | 18.6 | 17.8 | 17.1 |
| | 35 + 35 + 50 | 3.94 | 3.94 | 5.63 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4060 | 4350 | 18.6 | 17.8 | 17.1 |
| | 35 + 35 + 60 | 3.63 | 3.63 | 6.23 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 35 + 50 + 50 | 3.50 | 5.00 | 5.00 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 35 + 50 + 60 | 3.26 | 4.66 | 5.59 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 35 + 60 + 60 | 3.05 | 5.23 | 5.23 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4050 | 4350 | 18.6 | 17.8 | 17.0 |
| | 50 + 50 + 50 | 4.50 | 4.50 | 4.50 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4040 | 4350 | 18.5 | 17.7 | 17.0 |
| | 50 + 50 + 60 | 4.22 | 4.22 | 5.06 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4040 | 4350 | 18.5 | 17.7 | 17.0 |
| | 50 + 60 + 60 | 3.97 | 4.76 | 4.76 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4040 | 4350 | 18.5 | 17.7 | 17.0 |
| 6 room | 60 + 60 + 60 | 4.50 | 4.50 | 4.50 | — | — | 3.2 | 13.5 | 14.0 | 780 | 4030 | 4350 | 18.5 | 17.7 | 17.0 |
| | 20 + 20 + 20 + 20 | 3.00 | 3.00 | 3.00 | 3.00 | — | 3.6 | 12.0 | 14.0 | 950 | 3210 | 3920 | 14.6 | 14.0 | 13.4 |
| | 20 + 20 + 20 + 25 | 2.92 | 2.92 | 2.92 | 3.65 | — | 3.6 | 12.4 | 14.0 | 950 | 3390 | 3920 | 15.4 | 14.8 | 14.1 |
| | 20 + 20 + 20 + 35 | 2.84 | 2.84 | 2.84 | 4.97 | — | 3.6 | 13.5 | 14.0 | 950 | 3700 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 20 + 20 + 50 | 2.45 | 2.45 | 2.45 | 6.14 | — | 3.6 | 13.5 | 14.0 | 950 | 3690 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 20 + 20 + 60 | 2.25 | 2.25 | 2.25 | 6.75 | — | 3.6 | 13.5 | 14.0 | 950 | 3690 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 20 + 25 + 25 | 2.84 | 2.84 | 3.56 | 3.56 | — | 3.6 | 12.8 | 14.0 | 950 | 3440 | 3920 | 15.7 | 15.0 | 14.3 |
| | 20 + 20 + 25 + 35 | 2.70 | 2.70 | 3.38 | 4.73 | — | 3.6 | 13.5 | 14.0 | 950 | 3700 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 20 + 25 + 50 | 2.16 | 2.16 | 2.93 | 5.87 | — | 3.6 | 13.5 | 14.0 | 950 | 3690 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 20 + 25 + 60 | 2.16 | 2.16 | 2.70 | 6.48 | — | 3.6 | 13.5 | 14.0 | 950 | 3680 | 3920 | 16.7 | 16.0 | 15.3 |
| | 20 + 20 + 35 + 35 | 2.45 | 2.45 | 4.30 | 4.30 | — | 3.6 | 13.5 | 14.0 | 950 | 3690 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 20 + 35 + 50 | 2.16 | 2.16 | 3.78 | 5.40 | — | 3.6 | 13.5 | 14.0 | 950 | 3680 | 3920 | 16.7 | 16.0 | 15.3 |
| | 20 + 20 + 35 + 60 | 2.00 | 2.00 | 3.50 | 6.00 | — | 3.6 | 13.5 | 14.0 | 950 | 3680 | 3920 | 16.7 | 16.0 | 15.3 |
| | 20 + 20 + 50 + 50 | 1.93 | 1.93 | 4.82 | 4.82 | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 20 + 20 + 50 + 60 | 1.80 | 1.80 | 4.50 | 5.40 | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 20 + 25 + 25 + 25 | 3.47 | 3.47 | 3.47 | — | — | 3.6 | 13.2 | 14.0 | 950 | 3550 | 3920 | 16.2 | 15.5 | 14.8 |
| | 20 + 25 + 25 + 35 | 3.21 | 3.21 | 4.50 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3700 | 3920 | 16.8 | 16.1 | 15.4 |
| | 20 + 25 + 25 + | | | | | | | | | | | | | | |

Combinations

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|--------|------|------|------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | 220V | 230V | 240V |
| 4 room | 25 + 25 + 35 + 35 | 2.81 | 2.81 | 3.94 | 3.94 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3690 | 3920 | 16.8 | 16.1 | 15.4 |
| | 25 + 25 + 35 + 50 | 2.50 | 2.50 | 3.50 | 5.00 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3680 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 25 + 35 + 60 | 2.33 | 2.33 | 3.26 | 5.59 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 25 + 50 + 50 | 2.25 | 2.25 | 4.50 | 4.50 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 25 + 50 + 60 | 2.11 | 2.11 | 4.22 | 5.06 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 25 + 60 + 60 | 1.99 | 1.99 | 4.76 | 4.76 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 25 + 35 + 35 + 35 | 2.60 | 3.63 | 3.63 | 3.63 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3680 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 35 + 35 + 50 | 2.33 | 3.26 | 3.26 | 4.66 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 35 + 35 + 60 | 2.18 | 3.05 | 3.05 | 5.23 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 35 + 50 + 50 | 2.11 | 2.95 | 4.22 | 4.22 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 25 + 35 + 50 + 60 | 1.99 | 2.78 | 3.97 | 4.76 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 25 + 35 + 60 + 60 | 1.88 | 2.63 | 4.50 | 4.50 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 25 + 50 + 50 + 50 | 1.93 | 3.86 | 3.86 | 3.86 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 25 + 50 + 60 + 60 | 1.82 | 3.65 | 3.65 | 4.38 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3650 | 3920 | 16.6 | 15.9 | 15.2 |
| | 35 + 35 + 35 + 35 | 3.38 | 3.38 | 3.38 | 3.38 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 35 + 35 + 35 + 50 | 3.05 | 3.05 | 4.35 | — | — | — | 3.6 | 13.5 | 14.0 | 950 | 3670 | 3920 | 16.7 | 16.0 | 15.3 |
| | 35 + 35 + 35 + 60 | 2.86 | 2.86 | 2.86 | 4.91 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 35 + 35 + 50 + 50 | 2.78 | 2.78 | 3.97 | 3.97 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 35 + 35 + 50 + 60 | 2.63 | 2.63 | 3.75 | 4.50 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3660 | 3920 | 16.7 | 15.9 | 15.3 |
| | 35 + 35 + 60 + 60 | 2.49 | 2.49 | 4.26 | 4.26 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3650 | 3920 | 16.6 | 15.9 | 15.2 |
| | 35 + 50 + 50 + 50 | 2.55 | 3.65 | 3.65 | 3.65 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3650 | 3920 | 16.6 | 15.9 | 15.2 |
| | 35 + 50 + 50 + 60 | 2.42 | 3.46 | 3.46 | 4.15 | — | — | 3.6 | 13.5 | 14.0 | 950 | 3650 | 3920 | 16.6 | 15.9 | 15.2 |
| Heating operation | 20 + 20 + 20 + 20 + 20 | 2.70 | 2.70 | 2.70 | 2.70 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3380 | 3470 | 15.4 | 14.7 | 14.1 |
| | 20 + 20 + 20 + 20 + 25 | 2.57 | 2.57 | 2.57 | 3.21 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3380 | 3470 | 15.4 | 14.7 | 14.1 |
| | 20 + 20 + 20 + 20 + 35 | 2.35 | 2.35 | 2.35 | 4.11 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3370 | 3470 | 15.3 | 14.7 | 14.1 |
| | 20 + 20 + 20 + 20 + 50 | 2.08 | 2.08 | 2.08 | 5.19 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 20 + 60 | 1.93 | 1.93 | 1.93 | 5.79 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 25 + 25 | 2.45 | 2.45 | 3.07 | 3.07 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3380 | 3470 | 15.4 | 14.7 | 14.1 |
| | 20 + 20 + 20 + 25 + 35 | 2.25 | 2.25 | 2.25 | 2.81 | 3.94 | — | 4.0 | 13.5 | 14.0 | 1050 | 3370 | 3470 | 15.3 | 14.7 | 14.1 |
| | 20 + 20 + 20 + 25 + 50 | 2.00 | 2.00 | 2.00 | 2.50 | 5.00 | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 25 + 60 | 1.86 | 1.86 | 2.33 | 5.59 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 35 + 35 | 2.08 | 2.08 | 2.08 | 3.63 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 35 + 50 | 1.86 | 1.86 | 1.86 | 4.66 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 35 + 60 | 1.74 | 1.74 | 3.05 | 5.23 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 20 + 20 + 50 + 50 | 1.69 | 1.69 | 4.22 | 4.22 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 20 + 50 + 60 | 1.59 | 1.59 | 3.97 | 4.76 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 20 + 60 + 60 | 1.50 | 1.50 | 1.50 | 4.50 | 4.50 | — | 4.0 | 13.5 | 14.0 | 1050 | 3330 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 25 + 25 + 25 | 2.35 | 2.35 | 2.93 | 2.93 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3370 | 3470 | 15.3 | 14.7 | 14.1 |
| | 20 + 20 + 25 + 25 + 35 | 2.16 | 2.16 | 2.70 | 2.70 | 3.78 | — | 4.0 | 13.5 | 14.0 | 1050 | 3370 | 3470 | 15.3 | 14.7 | 14.1 |
| | 20 + 20 + 25 + 25 + 50 | 1.93 | 1.93 | 2.41 | 2.41 | 4.82 | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 20 + 25 + 25 + 60 | 1.80 | 1.80 | 2.25 | 2.25 | 5.40 | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 25 + 35 + 35 | 2.00 | 2.00 | 2.50 | 3.50 | 3.50 | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 20 + 25 + 35 + 50 | 1.80 | 1.80 | 2.25 | 3.15 | 4.50 | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 20 + 25 + 35 + 60 | 1.69 | 1.69 | 2.11 | 2.95 | 5.06 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 25 + 50 + 50 | 1.64 | 1.64 | 2.05 | 2.05 | 4.91 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 25 + 50 + 60 | 1.54 | 1.54 | 1.88 | 2.63 | 3.75 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 35 + 60 + 60 | 1.46 | 1.46 | 3.26 | 3.26 | 4.63 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 35 + 35 + 35 | 1.86 | 1.86 | 3.26 | 3.26 | 3.26 | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 20 + 35 + 35 + 50 | 1.69 | 1.69 | 2.95 | 2.95 | 4.22 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 35 + 35 + 60 | 1.59 | 1.59 | 2.78 | 2.78 | 4.76 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 35 + 50 + 50 | 1.54 | 1.54 | 2.70 | 2.70 | 3.86 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 35 + 50 + 60 | 1.50 | 1.50 | 2.63 | 3.75 | 4.38 | — | 4.0 | 13.5 | 14.0 | 1050 | 3330 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 20 + 35 + 60 + 60 | 1.38 | 1.38 | 2.42 | 4.15 | 4.15 | — | 4.0 | 13.5 | 14.0 | 1050 | 3320 | 3470 | 15.1 | 14.4 | 13.8 |
| | 20 + 20 + 50 + 50 + 50 | 1.42 | 1.42 | 3.55 | 3.55 | 3.55 | — | 4.0 | 13.5 | 14.0 | 1050 | 3320 | 3470 | 15.1 | 14.4 | 13.8 |
| | 20 + 25 + 25 + 25 + 25 | 2.25 | 2.81 | 2.81 | 2.81 | — | — | 4.0 | 13.5 | 14.0 | 1050 | 3370 | 3470 | 15.3 | 14.7 | 14.1 |
| | 20 + 25 + 25 + 25 + 35 | 2.08 | 2.60 | 2.60 | 2.60 | 3.63 | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 25 + 25 + 25 + 50 | 1.86 | 2.33 | 2.33 | 2.33 | 4.66 | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 25 + 25 + 25 + 60 | 1.74 | 2.18 | 2.18 | 2.18 | 5.23 | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 25 + 25 + 35 + 35 | 1.93 | 2.41 | 2.41 | 3.38 | 3.38 | — | 4.0 | 13.5 | 14.0 | 1050 | 3360 | 3470 | 15.3 | 14.6 | 14.0 |
| | 20 + 25 + 25 + 35 + 50 | 1.74 | 2.18 | 2.18 | 3.05 | 4.35 | — | 4.0 | 13.5 | 14.0 | 1050 | 3350 | 3470 | 15.2 | 14.6 | 14.0 |
| | 20 + 25 + 25 + 35 + 60 | 1.64 | 2.05 | 2.05 | 2.86 | 4.91 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 25 + 25 + 50 + 50 | 1.50 | 1.88 | 2.63 | 3.75 | 3.75 | — | 4.0 | 13.5 | 14.0 | 1050 | 3330 | 3470 | 15.2 | 14.5 | 13.9 |
| | 20 + 25 + 25 + 50 + 60 | 1.42 | 1.78 | 1.78 | 4.26 | 4.26 | — | 4.0 | 13.5 | 14.0 | 1050 | 3320 | 3470</ | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-------------------------|--------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | | |
| Heating operation | 5 room | 25 + 35 + 35 + 50 + 50 | 1.73 | 2.42 | 2.42 | 3.46 | 3.46 | — | 4.0 | 13.5 | 14.0 | 1050 | 3320 | 3470 | 15.1 | 14.4 | 13.8 |
| | | 35 + 35 + 35 + 35 + 35 | 2.70 | 2.70 | 2.70 | 2.70 | 2.70 | — | 4.0 | 13.5 | 14.0 | 1050 | 3340 | 3470 | 15.2 | 14.5 | 13.9 |
| | | 35 + 35 + 35 + 35 + 50 | 2.49 | 2.49 | 2.49 | 2.49 | 3.55 | — | 4.0 | 13.5 | 14.0 | 1050 | 3320 | 3470 | 15.1 | 14.4 | 13.8 |
| | | 20 + 20 + 20 + 20 + 20 | 2.25 | 2.25 | 2.25 | 2.25 | 2.25 | 2.25 | 4.5 | 13.5 | 14.0 | 1150 | 3260 | 3420 | 14.8 | 14.2 | 13.6 |
| | | 20 + 20 + 20 + 20 + 25 | 2.16 | 2.16 | 2.16 | 2.16 | 2.16 | 2.70 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 |
| | | 20 + 20 + 20 + 20 + 35 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 3.50 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 |
| | | 20 + 20 + 20 + 20 + 50 | 1.80 | 1.80 | 1.80 | 1.80 | 1.80 | 4.50 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 |
| | | 20 + 20 + 20 + 20 + 60 | 1.69 | 1.69 | 1.69 | 1.69 | 1.69 | 5.06 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 20 + 25 + 25 | 2.08 | 2.08 | 2.08 | 2.60 | 2.60 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 20 + 25 + 35 | 1.93 | 1.93 | 1.93 | 2.41 | 3.38 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 20 + 25 + 50 | 1.74 | 1.74 | 1.74 | 2.18 | 4.35 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 20 + 25 + 60 | 1.64 | 1.64 | 1.64 | 2.05 | 4.91 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 20 + 35 + 35 | 1.80 | 1.80 | 1.80 | 3.15 | 3.15 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 20 + 35 + 50 | 1.64 | 1.64 | 1.64 | 2.86 | 4.09 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 20 + 35 + 60 | 1.54 | 1.54 | 1.54 | 2.70 | 4.63 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 20 + 50 + 50 | 1.50 | 1.50 | 1.50 | 3.75 | 3.75 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 20 + 50 + 60 | 1.42 | 1.42 | 1.42 | 3.55 | 4.26 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 25 + 25 | 2.00 | 2.00 | 2.50 | 2.50 | 2.50 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 25 + 25 + 35 | 1.86 | 1.86 | 2.33 | 2.33 | 3.26 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 25 + 25 + 50 | 1.69 | 1.69 | 2.11 | 4.22 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | | |
| | | 20 + 20 + 25 + 25 + 60 | 1.59 | 1.59 | 1.99 | 1.99 | 4.76 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 35 | 1.74 | 1.74 | 2.18 | 3.05 | 3.05 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 50 | 1.59 | 1.59 | 1.99 | 2.78 | 3.97 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 60 | 1.50 | 1.50 | 1.88 | 2.63 | 4.50 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 50 + 50 | 1.46 | 1.46 | 1.82 | 3.65 | 3.65 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 50 + 60 | 1.38 | 1.38 | 1.73 | 3.46 | 4.15 | 4.5 | 13.5 | 14.0 | 1150 | 3220 | 3420 | 14.7 | 14.0 | 13.4 | |
| | | 20 + 20 + 35 + 35 + 35 | 1.64 | 1.64 | 2.86 | 2.86 | 2.86 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 35 + 35 + 50 | 1.50 | 1.50 | 2.63 | 2.63 | 3.75 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 35 + 35 + 60 | 1.42 | 1.42 | 2.49 | 2.49 | 4.26 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 35 + 50 + 50 | 1.38 | 1.38 | 2.42 | 3.46 | 3.46 | 4.5 | 13.5 | 14.0 | 1150 | 3220 | 3420 | 14.7 | 14.0 | 13.4 | |
| | | 20 + 20 + 25 + 25 + 25 | 1.93 | 1.93 | 2.41 | 2.41 | 2.41 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 25 + 25 + 35 | 1.80 | 1.80 | 2.25 | 2.25 | 3.15 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 | |
| | | 20 + 20 + 25 + 25 + 50 | 1.64 | 1.64 | 2.05 | 2.05 | 2.05 | 4.09 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 25 + 60 | 1.54 | 1.54 | 1.93 | 1.93 | 4.63 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 35 | 1.69 | 1.69 | 2.11 | 2.11 | 2.95 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 50 | 1.54 | 1.54 | 1.93 | 1.93 | 2.70 | 3.86 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 60 | 1.46 | 1.46 | 1.82 | 1.82 | 2.55 | 4.38 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 50 + 50 | 1.42 | 1.42 | 1.78 | 1.78 | 3.55 | 3.55 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 35 | 1.59 | 1.59 | 1.99 | 2.78 | 2.78 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 50 | 1.46 | 1.46 | 1.82 | 2.55 | 2.55 | 3.65 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 60 | 1.38 | 1.38 | 1.73 | 2.42 | 2.42 | 4.15 | 4.5 | 13.5 | 14.0 | 1150 | 3220 | 3420 | 14.7 | 14.1 | 13.4 |
| | | 20 + 20 + 35 + 35 + 35 | 1.86 | 1.86 | 2.33 | 2.33 | 2.33 | 3.33 | 4.5 | 13.5 | 14.0 | 1150 | 3250 | 3420 | 14.8 | 14.1 | 13.6 |
| | | 20 + 20 + 25 + 25 + 35 | 1.74 | 1.74 | 2.18 | 2.18 | 2.18 | 3.05 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 25 + 50 | 1.59 | 1.59 | 1.99 | 1.99 | 3.97 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 25 + 60 | 1.54 | 1.54 | 1.93 | 1.93 | 2.63 | 2.63 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 35 | 1.69 | 1.69 | 2.05 | 2.05 | 2.86 | 2.86 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 50 | 1.50 | 1.50 | 1.88 | 1.88 | 2.63 | 3.75 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 60 | 1.42 | 1.42 | 1.78 | 1.78 | 2.49 | 4.26 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 50 + 50 | 1.38 | 1.38 | 2.25 | 2.25 | 2.25 | 2.25 | 4.5 | 13.5 | 14.0 | 1150 | 3220 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 35 | 1.74 | 1.74 | 2.11 | 2.11 | 2.95 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 25 + 50 | 1.59 | 1.59 | 1.93 | 1.93 | 2.70 | 2.70 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 25 + 60 | 1.52 | 1.52 | 1.93 | 1.93 | 2.42 | 4.38 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 35 | 1.74 | 1.74 | 2.18 | 2.18 | 2.18 | 3.05 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 50 | 1.59 | 1.59 | 1.99 | 1.99 | 3.97 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 | |
| | | 20 + 20 + 25 + 35 + 60 | 1.54 | 1.54 | 1.88 | 1.88 | 1.88 | 4.50 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 35 | 1.64 | 1.64 | 2.05 | 2.05 | 2.86 | 2.86 | 4.5 | 13.5 | 14.0 | 1150 | 3240 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 50 | 1.50 | 1.50 | 1.88 | 1.88 | 2.63 | 3.75 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 60 | 1.42 | 1.42 | 1.78 | 1.78 | 2.49 | 4.26 | 4.5 | 13.5 | 14.0 | 1150 | 3230 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 50 + 50 | 1.38 | 1.38 | 2.25 | 2.25 | 2.25 | 2.25 | 4.5 | 13.5 | 14.0 | 1150 | 3220 | 3420 | 14.7 | 14.1 | 13.5 |
| | | 20 + 20 + 25 + 35 + 35 | 1.74 | 1.74 | 2 | | | | | | | | | | | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|-------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|--------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | 220V | 230V | 240V |
| 3 room | 20 + 20 + 50 | 2.00 | 2.00 | 5.00 | — | — | — | 3.7 | 9.0 | 11.7 | 880 | 2600 | 4120 | 11.9 | 11.4 | 10.9 |
| | 20 + 20 + 60 | 2.00 | 2.00 | 6.00 | — | — | — | 3.7 | 10.0 | 12.6 | 880 | 3120 | 4680 | 14.3 | 13.7 | 13.1 |
| | 20 + 25 + 25 | 2.00 | 2.50 | 2.50 | — | — | — | 3.7 | 7.0 | 9.6 | 880 | 1850 | 3210 | 8.5 | 8.1 | 7.8 |
| | 20 + 25 + 35 | 2.00 | 2.50 | 3.50 | — | — | — | 3.7 | 8.0 | 10.1 | 880 | 2320 | 3630 | 10.7 | 10.2 | 9.8 |
| | 20 + 25 + 50 | 2.00 | 2.50 | 5.00 | — | — | — | 3.7 | 9.5 | 12.3 | 880 | 2980 | 4510 | 13.7 | 13.1 | 12.5 |
| | 20 + 25 + 60 | 2.00 | 2.50 | 6.00 | — | — | — | 3.7 | 10.5 | 12.8 | 880 | 3590 | 4800 | 16.5 | 15.8 | 15.1 |
| | 20 + 35 + 35 | 2.00 | 3.50 | 3.50 | — | — | — | 3.7 | 9.0 | 10.6 | 880 | 2780 | 4120 | 12.8 | 12.2 | 11.7 |
| | 20 + 35 + 50 | 2.00 | 3.50 | 5.00 | — | — | — | 3.7 | 10.5 | 12.8 | 880 | 3590 | 4800 | 16.5 | 15.8 | 15.1 |
| | 20 + 35 + 60 | 2.00 | 3.50 | 6.00 | — | — | — | 3.7 | 11.5 | 12.8 | 880 | 3950 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 50 + 50 | 2.00 | 5.00 | 5.00 | — | — | — | 3.7 | 12.0 | 12.8 | 880 | 4230 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 50 + 60 | 1.92 | 4.81 | 5.77 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 20 + 60 + 60 | 1.79 | 5.36 | 5.36 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 25 + 25 + 25 | 2.50 | 2.50 | 2.50 | — | — | — | 3.7 | 7.5 | 10.2 | 880 | 2030 | 3640 | 9.3 | 8.9 | 8.5 |
| | 25 + 25 + 35 | 2.50 | 2.50 | 3.50 | — | — | — | 3.7 | 8.5 | 10.7 | 880 | 2520 | 3900 | 11.6 | 11.1 | 10.6 |
| | 25 + 25 + 50 | 2.50 | 2.50 | 5.00 | — | — | — | 3.7 | 10.0 | 12.8 | 880 | 3260 | 4800 | 15.0 | 14.3 | 13.7 |
| | 25 + 25 + 60 | 2.50 | 2.50 | 6.00 | — | — | — | 3.7 | 11.0 | 12.8 | 880 | 3720 | 4800 | 17.1 | 16.3 | 15.7 |
| | 25 + 35 + 35 | 2.50 | 3.50 | 3.50 | — | — | — | 3.7 | 9.5 | 11.2 | 880 | 2980 | 4510 | 13.7 | 13.1 | 12.5 |
| | 25 + 35 + 50 | 2.50 | 3.50 | 5.00 | — | — | — | 3.7 | 11.0 | 12.8 | 880 | 3720 | 4800 | 17.1 | 16.3 | 15.7 |
| | 25 + 35 + 60 | 2.50 | 3.50 | 6.00 | — | — | — | 3.7 | 12.0 | 12.8 | 880 | 4230 | 4800 | 19.4 | 18.6 | 17.8 |
| | 25 + 50 + 50 | 2.50 | 5.00 | 5.00 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 25 + 50 + 60 | 2.31 | 4.63 | 5.56 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 25 + 60 + 60 | 2.16 | 5.17 | 5.17 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 35 + 35 + 35 | 3.50 | 3.50 | 3.50 | — | — | — | 3.7 | 10.5 | 11.7 | 880 | 3590 | 4180 | 16.5 | 15.8 | 15.1 |
| | 35 + 35 + 50 | 3.50 | 3.50 | 5.00 | — | — | — | 3.7 | 12.0 | 12.8 | 880 | 4230 | 4800 | 19.4 | 18.6 | 17.8 |
| | 35 + 35 + 60 | 3.37 | 3.37 | 5.77 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 35 + 50 + 50 | 3.24 | 4.63 | 4.63 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.4 | 19.5 | 18.7 |
| | 35 + 50 + 60 | 3.02 | 4.31 | 5.17 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.2 | 19.3 | 18.5 |
| | 35 + 60 + 60 | 2.82 | 4.84 | 4.84 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4450 | 4800 | 20.2 | 19.3 | 18.5 |
| | 50 + 50 + 50 | 4.17 | 4.17 | 4.17 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4440 | 4800 | 20.4 | 19.5 | 18.7 |
| | 50 + 50 + 60 | 3.91 | 3.91 | 4.69 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4440 | 4800 | 20.4 | 19.5 | 18.7 |
| | 50 + 60 + 60 | 3.68 | 4.41 | 4.41 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4430 | 4800 | 20.3 | 19.5 | 18.6 |
| | 60 + 60 + 60 | 4.17 | 4.17 | 4.17 | — | — | — | 3.7 | 12.5 | 12.8 | 880 | 4430 | 4800 | 20.3 | 19.5 | 18.6 |
| Cooling operation | 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | — | — | 4.4 | 8.0 | 11.2 | 1100 | 2050 | 3680 | 9.3 | 8.9 | 8.6 |
| | 20 + 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | — | — | 4.4 | 8.5 | 11.8 | 1100 | 2320 | 3890 | 10.6 | 10.1 | 9.7 |
| | 20 + 20 + 20 + 35 | 2.00 | 2.00 | 2.00 | 3.50 | — | — | 4.4 | 9.5 | 12.3 | 1100 | 2820 | 4530 | 12.8 | 12.3 | 11.8 |
| | 20 + 20 + 20 + 50 | 2.00 | 2.00 | 2.00 | 5.00 | — | — | 4.4 | 11.0 | 13.0 | 1100 | 3480 | 4800 | 15.8 | 15.1 | 14.5 |
| | 20 + 20 + 20 + 60 | 2.00 | 2.00 | 2.00 | 6.00 | — | — | 4.4 | 12.0 | 13.0 | 1100 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 25 | 2.00 | 2.00 | 2.50 | 2.50 | — | — | 4.4 | 9.0 | 12.4 | 1100 | 2520 | 4590 | 11.5 | 11.0 | 10.5 |
| | 20 + 20 + 25 + 35 | 2.00 | 2.00 | 2.50 | 3.50 | — | — | 4.4 | 10.0 | 12.9 | 1100 | 3120 | 4780 | 14.2 | 13.6 | 13.0 |
| | 20 + 20 + 25 + 50 | 2.00 | 2.00 | 2.50 | 5.00 | — | — | 4.4 | 11.5 | 13.0 | 1100 | 3720 | 4800 | 16.9 | 16.2 | 15.5 |
| | 20 + 20 + 25 + 60 | 2.00 | 2.00 | 2.50 | 6.00 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4600 | 4800 | 20.9 | 20.0 | 19.2 |
| | 20 + 20 + 35 + 35 | 2.00 | 2.00 | 3.50 | 3.50 | — | — | 4.4 | 11.0 | 13.0 | 1100 | 3480 | 4800 | 15.8 | 15.1 | 14.5 |
| | 20 + 20 + 35 + 50 | 2.00 | 2.00 | 3.50 | 5.00 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4600 | 4800 | 20.9 | 20.0 | 19.2 |
| | 20 + 20 + 35 + 60 | 1.85 | 1.85 | 3.24 | 5.56 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 20 + 50 + 50 | 1.79 | 1.79 | 4.46 | 4.46 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 20 + 50 + 60 | 1.67 | 1.67 | 4.17 | 5.00 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 20 + 60 + 60 | 1.56 | 1.56 | 4.69 | 4.69 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4580 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 9.5 | 13.0 | 1100 | 2820 | 4800 | 12.8 | 12.3 | 11.8 |
| | 20 + 25 + 25 + 35 | 2.00 | 2.50 | 2.50 | 3.50 | — | — | 4.4 | 10.5 | 13.0 | 1100 | 3340 | 4800 | 15.2 | 14.5 | 13.9 |
| | 20 + 25 + 25 + 50 | 2.00 | 2.50 | 2.50 | 5.00 | — | — | 4.4 | 12.0 | 13.0 | 1100 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 25 + 25 + 60 | 1.92 | 2.40 | 2.40 | 5.77 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4600 | 4800 | 20.9 | 20.0 | 19.2 |
| | 20 + 25 + 35 + 35 | 2.00 | 2.50 | 3.50 | 3.50 | — | — | 4.4 | 11.5 | 13.0 | 1100 | 3720 | 4800 | 16.9 | 16.2 | 15.5 |
| | 20 + 25 + 35 + 50 | 1.92 | 2.40 | 3.37 | 4.81 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4600 | 4800 | 20.9 | 20.0 | 19.2 |
| | 20 + 25 + 35 + 60 | 1.79 | 2.23 | 3.13 | 5.36 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 25 + 50 + 50 | 1.72 | 2.16 | 4.31 | 4.31 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 25 + 50 + 60 | 1.61 | 2.02 | 4.03 | 4.84 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4580 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 25 + 60 + 60 | 1.52 | 1.89 | 4.55 | 4.55 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4580 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 35 + 35 + 35 | 2.00 | 3.50 | 3.50 | 3.50 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4600 | 4800 | 20.9 | 20.0 | 19.2 |
| | 20 + 35 + 35 + 50 | 1.79 | 3.13 | 3.13 | 4.46 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 35 + 35 + 60 | 1.67 | 2.92 | 2.92 | 5.00 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4590 | 4800 | 20.9 | 20.0 | 19.1 |
| | 20 + 35 + 50 + 50 | 1.61 | 2.82 | 4.03 | 4.03 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4580 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 35 + 50 + 60 | 1.52 | 2.65 | 3.79 | 4.55 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4580 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 35 + 60 + 60 | 1.43 | 2.50 | 4.29 | 4.29 | — | — | 5.4 | 12.5 | 13.0 | 1100 | 4570 | 4801 | 20.6 | 19.7 | 18.9 |
| | 20 + 50 + 50 + 50 | 1.47 | 3.68 | 3.68 | 3.68 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4580 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 50 + 50 + 60 | 1.39 | 3.47 | 3.47 | 4.17 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4570 | 4800 | 20.8 | 19.9 | 19.1 |
| | 20 + 50 + 60 + 60 | 1.32 | 3.29 | 3.95 | 3.95 | — | — | 4.4 | 12.5 | 13.0 | 1100 | 4560 | 4800 | 20.7 | 19.8 | 19.0</ |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|------|
| | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | | |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | | |
| 5 room | 20 + 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | — | 5.1 | 10.0 | 13.5 | 1210 | 2880 | 4800 | 13.1 | 12.5 | 12.0 | |
| | 20 + 20 + 20 + 20 + 25 | 2.00 | 2.00 | 2.00 | 2.50 | — | 5.1 | 10.5 | 13.5 | 1210 | 3120 | 4800 | 14.2 | 13.6 | 13.0 | |
| | 20 + 20 + 20 + 20 + 35 | 2.00 | 2.00 | 2.00 | 3.50 | — | 5.1 | 11.5 | 13.5 | 1210 | 3620 | 4800 | 16.5 | 15.8 | 15.1 | |
| | 20 + 20 + 20 + 20 + 50 | 1.92 | 1.92 | 1.92 | 4.81 | — | 5.1 | 12.5 | 13.5 | 1210 | 4320 | 4800 | 19.7 | 18.8 | 18.0 | |
| | 20 + 20 + 20 + 20 + 60 | 1.79 | 1.79 | 1.79 | 5.36 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 | |
| | 20 + 20 + 20 + 25 + 25 | 2.00 | 2.00 | 2.50 | 2.50 | — | 5.1 | 11.0 | 13.5 | 1210 | 3320 | 4800 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 25 + 35 | 2.00 | 2.00 | 2.50 | 3.50 | — | 5.1 | 12.0 | 13.5 | 1210 | 3990 | 4800 | 18.2 | 17.4 | 16.6 | |
| | 20 + 20 + 20 + 25 + 50 | 1.85 | 1.85 | 1.85 | 4.63 | — | 5.1 | 12.5 | 13.5 | 1210 | 4320 | 4800 | 19.7 | 18.8 | 18.0 | |
| | 20 + 20 + 20 + 25 + 60 | 1.72 | 1.72 | 1.72 | 5.17 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 | |
| | 20 + 20 + 20 + 35 + 35 | 1.92 | 1.92 | 3.37 | 3.37 | — | 5.1 | 12.5 | 13.5 | 1210 | 4320 | 4800 | 19.7 | 18.8 | 18.0 | |
| | 20 + 20 + 20 + 35 + 50 | 1.72 | 1.72 | 3.02 | 4.31 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 | |
| | 20 + 20 + 20 + 35 + 60 | 1.61 | 1.61 | 2.82 | 4.84 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 | |
| | 20 + 20 + 20 + 50 + 50 | 1.56 | 1.56 | 3.91 | 3.91 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 | |
| | 20 + 20 + 20 + 50 + 60 | 1.47 | 1.47 | 3.68 | 4.41 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 | |
| | 20 + 20 + 20 + 60 + 60 | 1.39 | 1.39 | 4.17 | 4.17 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 | |
| | 20 + 20 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | 5.1 | 11.5 | 13.5 | 1210 | 3620 | 4800 | 16.5 | 15.8 | 15.1 | |
| | 20 + 20 + 25 + 25 + 35 | 2.00 | 2.50 | 2.50 | 3.50 | — | 5.1 | 12.5 | 13.5 | 1210 | 4330 | 4800 | 19.7 | 18.8 | 18.1 | |
| | 20 + 20 + 25 + 25 + 50 | 1.79 | 2.23 | 2.23 | 4.46 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 | |
| | 20 + 20 + 25 + 25 + 60 | 1.67 | 2.08 | 2.08 | 5.00 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 | |
| | 20 + 20 + 25 + 35 + 35 | 1.85 | 2.31 | 3.24 | 3.24 | — | 5.1 | 12.5 | 13.5 | 1210 | 4320 | 4800 | 19.7 | 18.8 | 18.0 | |
| | 20 + 20 + 25 + 35 + 50 | 1.67 | 1.67 | 2.08 | 2.92 | 4.17 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 20 + 25 + 35 + 60 | 1.56 | 1.56 | 1.95 | 2.73 | 4.69 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 20 + 25 + 50 + 50 | 1.52 | 1.52 | 1.89 | 3.79 | 3.79 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 20 + 25 + 50 + 60 | 1.43 | 1.43 | 2.50 | 3.57 | 3.57 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 20 + 25 + 60 + 60 | 1.35 | 1.35 | 3.91 | 3.91 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 | |
| | 20 + 20 + 35 + 35 + 35 | 1.72 | 3.02 | 3.02 | 3.02 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 | |
| | 20 + 20 + 35 + 35 + 50 | 1.56 | 1.56 | 2.73 | 2.73 | 3.91 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 20 + 35 + 35 + 60 | 1.47 | 1.47 | 2.57 | 2.57 | 4.41 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 20 + 35 + 50 + 50 | 1.43 | 1.43 | 2.50 | 3.57 | 3.57 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 20 + 35 + 50 + 60 | 1.35 | 1.35 | 3.36 | 3.38 | 4.05 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 20 + 35 + 60 + 60 | 1.28 | 1.28 | 2.24 | 3.85 | 3.85 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 20 + 50 + 50 + 50 | 1.32 | 1.32 | 3.29 | 3.29 | 3.29 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | 2.50 | — | 5.1 | 12.0 | 13.5 | 1210 | 3990 | 4800 | 18.2 | 17.4 | 16.6 |
| | 20 + 25 + 25 + 25 + 35 | 1.92 | 2.40 | 2.40 | 2.40 | 3.37 | — | 5.1 | 12.5 | 13.5 | 1210 | 4320 | 4800 | 19.7 | 18.8 | 18.0 |
| | 20 + 25 + 25 + 25 + 50 | 1.72 | 2.16 | 2.16 | 2.16 | 4.31 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 |
| | 20 + 25 + 25 + 25 + 60 | 1.61 | 2.02 | 2.02 | 2.02 | 4.84 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 25 + 25 + 35 + 35 | 1.79 | 2.23 | 2.23 | 3.13 | 3.13 | — | 5.1 | 12.5 | 13.5 | 1210 | 4310 | 4800 | 19.6 | 18.8 | 18.0 |
| | 20 + 25 + 25 + 35 + 50 | 1.61 | 2.02 | 2.02 | 2.82 | 4.03 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 25 + 25 + 35 + 60 | 1.52 | 1.52 | 1.89 | 2.65 | 4.55 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 25 + 25 + 50 + 50 | 1.47 | 1.84 | 1.84 | 3.68 | 3.68 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 25 + 25 + 50 + 60 | 1.35 | 1.64 | 2.36 | 3.38 | 4.05 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 60 + 60 | 1.28 | 1.28 | 2.24 | 3.85 | 3.85 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 35 + 35 | 1.67 | 2.08 | 2.92 | 2.92 | 2.92 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 50 | 1.52 | 1.89 | 2.65 | 2.65 | 3.79 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 60 | 1.43 | 1.79 | 2.50 | 2.50 | 4.29 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 50 + 50 | 1.39 | 1.74 | 2.43 | 3.47 | 3.47 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 50 + 60 | 1.32 | 1.64 | 2.30 | 3.29 | 3.95 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 35 + 35 | 1.72 | 2.08 | 2.92 | 2.92 | 2.92 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 50 | 1.56 | 1.95 | 1.95 | 4.69 | 4.69 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 60 | 1.43 | 1.79 | 2.50 | 2.50 | 4.29 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 50 + 50 | 1.32 | 1.64 | 2.30 | 3.29 | 3.95 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 50 + 60 | 1.28 | 1.60 | 3.21 | 3.21 | 3.21 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 35 + 35 | 1.56 | 2.73 | 2.73 | 2.73 | 2.73 | — | 5.1 | 12.5 | 13.5 | 1210 | 4300 | 4800 | 19.6 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 50 | 1.43 | 2.50 | 2.50 | 3.57 | 3.57 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 35 + 60 | 1.35 | 2.36 | 2.36 | 4.05 | 4.05 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 50 + 50 | 1.32 | 2.30 | 2.30 | 3.29 | 3.29 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 50 + 60 | 1.28 | 2.30 | 2.30 | 3.95 | 3.95 | — | 5.1 | 12.5 | 13.5 | 1210 | 4260 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 35 + 35 | 1.74 | 2.43 | 2.43 | 4.41 | 4.41 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 50 | 1.59 | 1.79 | 1.79 | 3.57 | 3.57 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 35 + 60 | 1.49 | 1.69 | 1.69 | 3.38 | 4.05 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 50 + 60 | 1.60 | 1.60 | 1.60 | 3.85 | 3.85 | — | 5.1 | 12.5 | 13.5 | 1210 | 4270 | 4800 | 19.4 | 18.6 | 17.8 |
| | 20 + 25 + 35 + 35 + 35 | 1.89 | 2.65 | 2.65 | 2.65 | 2.65 | — | 5.1 | 12.5 | 13.5 | 1210 | 4290 | 4800 | 19.5 | 18.7 | 17.9 |
| | 20 + 25 + 35 + 35 + 50 | 1.74 | 2.43 | 2.43 | 2.43 | 3.47 | — | 5.1 | 12.5 | 13.5 | 1210 | 4280 | 4800 | 19.5 | 18.6 | 17.9 |
| | 20 + 25 + 35 + 50 + 60 | | | | | | | | | | | | | | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-----------------------------|-----------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | 220V | 230V | 240V |
| Cooling operation 6 room | 20 + 20 + 20 + 25 + 35 + 60 | 1.39 | 1.39 | 1.39 | 1.74 | 2.43 | 4.17 | 5.5 | 12.5 | 14.0 | 1280 | 3820 | 4800 | 17.4 | 16.6 | 15.9 |
| | 20 + 20 + 20 + 25 + 50 + 50 | 1.35 | 1.35 | 1.35 | 1.69 | 3.38 | 3.38 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 |
| | 20 + 20 + 20 + 25 + 50 + 60 | 1.28 | 1.28 | 1.28 | 1.60 | 3.21 | 3.85 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 |
| | 20 + 20 + 20 + 35 + 35 + 35 | 1.52 | 1.52 | 1.52 | 2.65 | 2.65 | 2.65 | 5.5 | 12.5 | 14.0 | 1280 | 3850 | 4800 | 17.5 | 16.8 | 16.1 |
| | 20 + 20 + 20 + 35 + 35 + 50 | 1.39 | 1.39 | 1.39 | 2.43 | 2.43 | 3.47 | 5.5 | 12.5 | 14.0 | 1280 | 3820 | 4800 | 17.4 | 16.6 | 15.9 |
| | 20 + 20 + 20 + 35 + 35 + 60 | 1.32 | 1.32 | 1.32 | 2.30 | 2.30 | 3.95 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 |
| | 20 + 20 + 20 + 35 + 50 + 50 | 1.28 | 1.28 | 1.28 | 2.24 | 3.21 | 3.21 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 |
| | 20 + 20 + 25 + 25 + 25 + 25 | 1.79 | 1.79 | 2.23 | 2.23 | 2.23 | 2.23 | 5.5 | 12.5 | 14.0 | 1280 | 3880 | 4800 | 17.7 | 16.9 | 16.2 |
| | 20 + 20 + 25 + 25 + 25 + 35 | 1.67 | 1.67 | 2.08 | 2.08 | 2.08 | 2.92 | 5.5 | 12.5 | 14.0 | 1280 | 3860 | 4800 | 17.6 | 16.8 | 16.1 |
| | 20 + 20 + 25 + 25 + 25 + 50 | 1.52 | 1.52 | 1.89 | 1.89 | 1.89 | 3.79 | 5.5 | 12.5 | 14.0 | 1280 | 3850 | 4800 | 17.5 | 16.8 | 16.1 |
| | 20 + 20 + 25 + 25 + 25 + 60 | 1.43 | 1.43 | 1.79 | 1.79 | 1.79 | 4.29 | 5.5 | 12.5 | 14.0 | 1280 | 3830 | 4800 | 17.4 | 16.7 | 16.0 |
| | 20 + 20 + 25 + 25 + 35 + 35 | 1.56 | 1.56 | 1.95 | 1.95 | 2.73 | 2.73 | 5.5 | 12.5 | 14.0 | 1280 | 3860 | 4800 | 17.6 | 16.8 | 16.1 |
| | 20 + 20 + 25 + 35 + 50 + 50 | 1.43 | 1.43 | 1.79 | 1.79 | 2.50 | 3.57 | 5.5 | 12.5 | 14.0 | 1280 | 3830 | 4800 | 17.4 | 16.7 | 16.0 |
| | 20 + 20 + 25 + 35 + 60 + 60 | 1.35 | 1.35 | 1.69 | 1.69 | 2.36 | 4.05 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 |
| | 20 + 20 + 25 + 50 + 50 + 50 | 1.32 | 1.32 | 1.64 | 1.64 | 3.29 | 3.29 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 |
| | 20 + 20 + 25 + 35 + 35 + 35 | 1.47 | 1.47 | 1.84 | 2.57 | 2.57 | 2.57 | 5.5 | 12.5 | 14.0 | 1280 | 3840 | 4800 | 17.5 | 16.7 | 16.0 |
| | 20 + 20 + 25 + 35 + 50 + 50 | 1.35 | 1.35 | 1.69 | 2.36 | 2.36 | 3.38 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 |
| | 20 + 20 + 25 + 35 + 60 + 60 | 1.28 | 1.28 | 1.60 | 2.24 | 3.85 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 20 + 20 + 35 + 35 + 35 + 35 | 1.39 | 1.39 | 2.43 | 2.43 | 2.43 | 4.23 | 5.5 | 12.5 | 14.0 | 1280 | 3820 | 4800 | 17.4 | 16.6 | 15.9 |
| | 20 + 20 + 35 + 35 + 50 + 50 | 1.28 | 1.28 | 2.24 | 2.24 | 3.21 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 20 + 25 + 25 + 25 + 25 + 25 | 1.72 | 2.16 | 2.16 | 2.16 | 2.16 | 5.5 | 12.5 | 14.0 | 1280 | 3870 | 4800 | 17.6 | 16.8 | 16.1 | |
| | 20 + 25 + 25 + 25 + 25 + 35 | 1.61 | 2.02 | 2.02 | 2.02 | 2.82 | 5.5 | 12.5 | 14.0 | 1280 | 3860 | 4800 | 17.6 | 16.8 | 16.1 | |
| | 20 + 25 + 25 + 25 + 50 + 50 | 1.47 | 1.84 | 1.84 | 1.84 | 3.68 | 5.5 | 12.5 | 14.0 | 1280 | 3840 | 4800 | 17.5 | 16.7 | 16.0 | |
| | 20 + 25 + 25 + 25 + 60 + 60 | 1.39 | 1.74 | 1.74 | 1.74 | 4.17 | 5.5 | 12.5 | 14.0 | 1280 | 3820 | 4800 | 17.4 | 16.6 | 15.9 | |
| | 20 + 25 + 25 + 35 + 35 + 35 | 1.52 | 1.89 | 1.89 | 1.89 | 2.65 | 2.65 | 5.5 | 12.5 | 14.0 | 1280 | 3850 | 4800 | 17.5 | 16.8 | 16.1 |
| | 20 + 25 + 25 + 35 + 50 + 50 | 1.39 | 1.74 | 1.74 | 2.43 | 3.47 | 5.5 | 12.5 | 14.0 | 1280 | 3820 | 4800 | 17.4 | 16.6 | 15.9 | |
| | 20 + 25 + 25 + 35 + 60 + 60 | 1.32 | 1.64 | 1.64 | 2.30 | 3.95 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 20 + 25 + 35 + 35 + 35 + 35 | 1.47 | 1.47 | 1.84 | 2.57 | 2.57 | 2.57 | 5.5 | 12.5 | 14.0 | 1280 | 3840 | 4800 | 17.5 | 16.7 | 16.0 |
| | 20 + 25 + 35 + 35 + 50 + 50 | 1.35 | 1.35 | 1.69 | 2.36 | 2.36 | 3.38 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 |
| | 20 + 25 + 35 + 35 + 60 + 60 | 1.28 | 1.28 | 2.24 | 2.24 | 3.21 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 20 + 25 + 35 + 50 + 50 + 50 | 1.32 | 1.64 | 1.64 | 2.30 | 3.29 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 20 + 25 + 35 + 35 + 35 + 35 | 1.35 | 1.69 | 2.36 | 2.36 | 2.36 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 | |
| | 20 + 35 + 35 + 35 + 35 + 35 | 1.28 | 2.24 | 2.24 | 2.24 | 2.24 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 25 + 25 + 25 + 25 + 25 + 25 | 2.08 | 2.08 | 2.08 | 2.08 | 2.08 | 5.5 | 12.5 | 14.0 | 1280 | 3860 | 4800 | 17.6 | 16.8 | 16.1 | |
| | 25 + 25 + 25 + 25 + 25 + 35 | 1.95 | 1.95 | 1.95 | 1.95 | 2.73 | 5.5 | 12.5 | 14.0 | 1280 | 3860 | 4800 | 17.6 | 16.8 | 16.1 | |
| | 25 + 25 + 25 + 25 + 50 + 50 | 1.43 | 1.79 | 1.79 | 1.79 | 3.57 | 5.5 | 12.5 | 14.0 | 1280 | 3830 | 4800 | 17.4 | 16.7 | 16.0 | |
| | 25 + 25 + 25 + 25 + 60 + 60 | 1.69 | 1.69 | 1.69 | 1.69 | 4.05 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 | |
| | 25 + 25 + 25 + 35 + 35 + 35 | 1.84 | 1.84 | 1.84 | 2.57 | 2.57 | 5.5 | 12.5 | 14.0 | 1280 | 3840 | 4800 | 17.5 | 16.7 | 16.0 | |
| | 25 + 25 + 25 + 35 + 50 + 50 | 1.69 | 1.69 | 1.69 | 2.36 | 3.38 | 5.5 | 12.5 | 14.0 | 1280 | 3810 | 4800 | 17.3 | 16.6 | 15.9 | |
| | 25 + 25 + 25 + 35 + 60 + 60 | 1.60 | 1.60 | 1.60 | 2.24 | 3.85 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 25 + 25 + 25 + 35 + 35 + 35 | 1.74 | 1.74 | 2.43 | 2.43 | 4.23 | 5.5 | 12.5 | 14.0 | 1280 | 3820 | 4800 | 17.4 | 16.6 | 15.9 | |
| | 25 + 25 + 25 + 35 + 50 + 50 | 1.60 | 1.60 | 1.60 | 2.24 | 3.21 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |
| | 25 + 25 + 35 + 35 + 35 + 35 | 1.64 | 1.64 | 2.30 | 2.30 | 2.30 | 5.5 | 12.5 | 14.0 | 1280 | 3800 | 4800 | 17.3 | 16.5 | 15.8 | |

SCM125ZJ-S1 Table of Indoor unit combination not with SRK-ZJX-S/S1 type only

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-----------------------------|---------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | 220V | 230V | 240V |
| Heating operation 1 room | 20 | 3.0 | — | — | — | — | — | 1.5 | 3.0 | 3.6 | 700 | 1220 | 1330 | 5.6 | 5.4 | 5.1 |
| | 25 | 3.4 | — | — | — | — | — | 1.5 | 3.4 | 4.1 | 700 | 1265 | 1540 | 5.8 | 5.6 | 5.3 |
| | 35 | 4.5 | — | — | — | — | — | 1.5 | 4.5 | 4.9 | 700 | 1650 | 1840 | 7.6 | 7.2 | 6.9 |
| | 50 | 5.8 | — | — | — | — | — | 1.5 | 5.8 | 6.4 | 700 | 2120 | 2410 | 9.7 | 9.3 | 8.9 |
| | 60 | 6.8 | — | — | — | — | — | 1.5 | 6.8 | 7.4 | 700 | 2500 | 2760 | 11.5 | 11.0 | 10.5 |
| | 71 | 8.0 | — | — | — | — | — | 1.5 | 8.0 | 8.1 | 700 | 3020 | 3090 | 13.9 | 13.3 | 12.7 |
| | 20 + 20 | 3.00 | 3.00 | — | — | — | — | 2.1 | 6.0 | 7.2 | 750 | 1540 | 1860 | 7.1 | 6.8 | 6.5 |
| | 20 + 25 | 2.84 | 3.56 | — | — | — | — | 2.1 | 6.4 | 7.7 | 750 | 1660 | 2210 | 7.6 | 7.3 | 7.0 |
| | 20 + 35 | 2.73 | 4.77 | — | — | — | — | 2.1 | 7.5 | 8.5 | 750 | 1990 | 2520 | 9.1 | 8.7 | 8.4 |
| | 20 + 50 | 2.51 | 6.29 | — | — | — | — | 2.1 | 8.8 | 10.0 | 750 | 2430 | 3220 | 11.2 | 10.7 | 10.2 |
| Heating operation 2 room | 20 + 60 | 2.45 | 7.35 | — | — | — | — | 2.1 | 9.8 | 11.0 | 750 | 2840 | 3620 | 13.0 | 12.5 | 12.0 |
| | 20 + 71 | 2.42 | 8.58 | — | — | — | — | 2.1 | 11.0 | 11.6 | 750 | 2840 | 3620 | 13.0 | 12.5 | 12.0 |
| | 25 + 25 | 3.40 | 3.40 | — | — | — | — | 2.1 | 6.8 | 8.2 | 750 | 1770 | 2420 | 8.1 | 7.8 | 7.4 |
| | 25 + 35 | 3.29 | 4.61 | — | — | — | — | 2.1 | 7.9 | 9.0 | 750 | 2140 | 2820 | 9 | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|
| | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | |
| 3 room | 20 + 50 + 60 | 2.08 | 5.19 | 6.23 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 20 + 50 + 71 | 1.91 | 4.79 | 6.80 | — | — | 4.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 20 + 60 + 60 | 1.93 | 5.79 | 5.79 | — | — | 5.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 20 + 60 + 71 | 1.79 | 5.36 | 6.35 | — | — | 6.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 20 + 71 + 71 | 1.67 | 5.92 | 5.92 | — | — | 7.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 25 + 25 + 25 | 3.40 | 3.40 | 3.40 | — | — | 3.2 | 10.2 | 12.4 | 780 | 2760 | 3880 |
| | 25 + 25 + 35 | 3.32 | 3.32 | 4.65 | — | — | 3.2 | 11.3 | 13.2 | 780 | 3170 | 4120 |
| | 25 + 25 + 50 | 3.15 | 3.15 | 6.30 | — | — | 3.2 | 12.6 | 13.8 | 780 | 3690 | 4350 |
| | 25 + 25 + 60 | 3.07 | 3.07 | 7.36 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 25 + 71 | 2.79 | 2.79 | 7.92 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 35 + 35 | 3.26 | 4.57 | 4.57 | — | — | 3.2 | 12.4 | 13.8 | 780 | 3780 | 4350 |
| | 25 + 35 + 50 | 3.07 | 4.30 | 6.14 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4140 | 4350 |
| | 25 + 35 + 60 | 2.81 | 3.94 | 6.75 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4140 | 4350 |
| | 25 + 35 + 71 | 2.58 | 3.61 | 7.32 | — | — | 4.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 50 + 50 | 2.70 | 5.40 | 5.40 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 50 + 60 | 2.50 | 5.00 | 6.00 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 50 + 71 | 2.31 | 4.62 | 6.57 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 60 + 60 | 2.33 | 5.59 | 5.59 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 25 + 60 + 71 | 2.16 | 5.19 | 6.14 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 25 + 71 + 71 | 2.02 | 5.74 | 5.74 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 35 + 35 + 35 | 4.50 | 4.50 | 4.50 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4140 | 4350 |
| | 35 + 35 + 50 | 3.94 | 3.94 | 5.63 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4140 | 4350 |
| | 35 + 35 + 60 | 3.63 | 3.63 | 6.23 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 35 + 35 + 71 | 3.35 | 3.35 | 6.80 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 35 + 50 + 50 | 3.50 | 5.00 | 5.00 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 35 + 50 + 60 | 3.26 | 4.66 | 5.59 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4130 | 4350 |
| | 35 + 50 + 71 | 3.03 | 4.33 | 6.14 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 35 + 60 + 60 | 3.05 | 5.23 | 5.23 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 35 + 60 + 71 | 2.85 | 4.88 | 5.77 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 35 + 71 + 71 | 2.67 | 5.42 | 5.42 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 50 + 50 + 50 | 4.50 | 4.50 | 4.50 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 50 + 50 + 60 | 4.22 | 4.22 | 5.06 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 50 + 50 + 71 | 3.95 | 3.95 | 5.61 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 50 + 60 + 60 | 3.97 | 4.76 | 4.76 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4120 | 4350 |
| | 50 + 60 + 71 | 3.73 | 4.48 | 5.30 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4110 | 4350 |
| | 60 + 60 + 60 | 4.50 | 4.50 | 4.50 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4110 | 4350 |
| | 60 + 60 + 71 | 4.24 | 4.24 | 5.02 | — | — | 3.2 | 13.5 | 13.8 | 780 | 4110 | 4350 |
| 4 room | 20 + 20 + 20 + 20 | 3.00 | 3.00 | 3.00 | 3.00 | — | 3.6 | 12.0 | 13.8 | 950 | 3270 | 3920 |
| | 20 + 20 + 20 + 25 | 2.92 | 2.92 | 3.65 | — | — | 3.6 | 12.4 | 13.8 | 950 | 3460 | 3920 |
| | 20 + 20 + 20 + 35 | 2.84 | 2.84 | 4.97 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3770 | 3920 |
| | 20 + 20 + 20 + 50 | 2.45 | 2.45 | 6.14 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3760 | 3920 |
| | 20 + 20 + 20 + 60 | 2.25 | 2.25 | 6.75 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3760 | 3920 |
| | 20 + 20 + 20 + 71 | 2.06 | 2.06 | 7.32 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 20 + 25 + 25 | 2.84 | 2.84 | 3.56 | — | — | 3.6 | 12.8 | 13.8 | 950 | 3510 | 3920 |
| | 20 + 20 + 25 + 35 | 2.70 | 2.70 | 3.38 | 4.73 | — | 3.6 | 13.5 | 13.8 | 950 | 3770 | 3920 |
| | 20 + 20 + 25 + 50 | 2.35 | 2.35 | 2.93 | 5.87 | — | 3.6 | 13.5 | 13.8 | 950 | 3760 | 3920 |
| | 20 + 20 + 25 + 60 | 2.16 | 2.16 | 2.70 | 6.48 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 20 + 25 + 71 | 1.99 | 1.99 | 2.48 | 7.05 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 20 + 35 + 35 | 2.45 | 2.45 | 4.30 | 4.30 | — | 3.6 | 13.5 | 13.8 | 950 | 3760 | 3920 |
| | 20 + 20 + 35 + 50 | 2.16 | 2.16 | 3.78 | 5.40 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 20 + 35 + 60 | 2.00 | 2.00 | 3.50 | 6.00 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 20 + 35 + 71 | 1.85 | 1.85 | 3.24 | 6.57 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 20 + 50 + 50 | 1.93 | 1.93 | 4.82 | 4.82 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 20 + 50 + 60 | 1.80 | 1.80 | 4.50 | 5.40 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 20 + 50 + 71 | 1.68 | 1.68 | 4.19 | 5.95 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 20 + 60 + 60 | 1.69 | 1.69 | 5.06 | 5.06 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 20 + 60 + 71 | 1.58 | 1.58 | 4.74 | 5.61 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 20 + 71 + 71 | 1.48 | 1.48 | 5.27 | 5.27 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 25 + 25 + 25 | 2.78 | 3.47 | 3.47 | 3.47 | — | 3.6 | 13.2 | 13.8 | 950 | 3620 | 3920 |
| | 20 + 25 + 25 + 35 | 2.57 | 3.21 | 3.21 | 4.50 | — | 3.6 | 13.5 | 13.8 | 950 | 3770 | 3920 |
| | 20 + 25 + 25 + 50 | 2.25 | 2.81 | 2.81 | 5.63 | — | 3.6 | 13.5 | 13.8 | 950 | 3760 | 3920 |
| | 20 + 25 + 25 + 60 | 2.08 | 2.60 | 2.60 | 6.23 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 25 + 25 + 71 | 1.91 | 2.39 | 2.39 | 6.80 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 25 + 35 + 35 | 2.35 | 2.93 | 4.11 | 4.11 | — | 3.6 | 13.5 | 13.8 | 950 | 3760 | 3920 |
| | 20 + 25 + 35 + 50 | 2.08 | 2.60 | 3.63 | 5.19 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 25 + 35 + 60 | 1.93 | 2.41 | 3.38 | 5.79 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 25 + 35 + 71 | 1.79 | 2.24 | 3.13 | 6.35 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 25 + 50 + 50 | 1.86 | 2.33 | 4.66 | 4.66 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 25 + 50 + 60 | 1.74 | 2.18 | 4.35 | 5.23 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 25 + 50 + 71 | 1.63 | 2.03 | 4.07 | 5.77 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 25 + 60 + 60 | 1.64 | 2.05 | 4.91 | 4.91 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 25 + 60 + 71 | 1.53 | 1.92 | 4.60 | 5.45 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 25 + 71 + 71 | 1.44 | 1.80 | 5.13 | 5.13 | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 20 + 35 + 35 + 35 | 2.16 | 3.78 | 3.78 | 3.78 | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 20 + 35 + 35 + 50 | 1.93 | 3.38 | 3.38 | 4.82 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 35 + 35 + 60 | 1.80 | 3.15 | 3.15 | 5.40 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 35 + 35 + 71 | 1.68 | 2.93 | 2.93 | 5.95 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 35 + 50 + 50 | 1.74 | 3.05 | 4.35 | 4.35 | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 20 + 35 + 50 + 60 | 1.64 | 2.86 | 4.09 | 4.91 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 35 + 50 + 71 | 1.53 | 2.68 | 3.84 | 5.45 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 35 + 60 + 60 | 1.54 | 2.70 | 4.63 | 4.63 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 35 + 60 + 71 | 1.45 | 2.54 | 4.35 | 5.15 | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 20 + 50 + 50 + 50 | 1.59 | 3.97 | 3.97 | 3.97 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 50 + 50 + 60 | 1.50 | 3.75 | 3.75 | 4.50 | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 20 + 50 + 50 + 71 | 1.41 | 3.53 | 3.53 | 5.0 | | | | | | | |

Combinations

| Indoor unit combination | | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | |
|-------------------------|-------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|
| | | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. |
| 4 room | 25 + 25 + 35 + 60 | 2.33 | 2.33 | 3.26 | 5.59 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 25 + 35 + 71 | 2.16 | 2.16 | 3.03 | 6.14 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 25 + 50 + 50 | 2.25 | 2.25 | 4.50 | 4.50 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 25 + 50 + 60 | 2.11 | 2.11 | 4.22 | 5.06 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 25 + 50 + 71 | 1.97 | 1.97 | 3.95 | 5.61 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 25 + 60 + 60 | 1.99 | 1.99 | 4.76 | 4.76 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 25 + 60 + 71 | 1.86 | 1.86 | 4.48 | 5.30 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 25 + 71 + 71 | 1.76 | 1.76 | 4.99 | 4.99 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 25 + 35 + 35 + 35 | 2.60 | 3.63 | 3.63 | 3.63 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3750 | 3920 |
| | 25 + 35 + 35 + 50 | 2.33 | 3.26 | 3.26 | 4.66 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 35 + 35 + 60 | 2.18 | 3.05 | 3.05 | 5.23 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 35 + 35 + 71 | 2.03 | 2.85 | 2.85 | 5.77 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 35 + 50 + 50 | 2.11 | 2.95 | 4.22 | 4.22 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 25 + 35 + 50 + 60 | 1.99 | 2.78 | 3.97 | 4.76 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 35 + 50 + 71 | 1.86 | 2.61 | 3.73 | 5.30 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 35 + 60 + 60 | 1.88 | 2.63 | 4.50 | 4.50 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 35 + 60 + 71 | 1.77 | 2.47 | 4.24 | 5.02 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 25 + 50 + 50 + 50 | 1.93 | 3.86 | 3.86 | 3.86 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 25 + 50 + 50 + 60 | 1.82 | 3.65 | 3.65 | 4.38 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 25 + 50 + 60 + 60 | 1.73 | 3.46 | 4.15 | 4.15 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 35 + 35 + 35 + 35 | 3.38 | 3.38 | 3.38 | 3.38 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 35 + 35 + 35 + 50 | 3.05 | 3.05 | 4.35 | — | — | — | 3.6 | 13.5 | 13.8 | 950 | 3740 | 3920 |
| | 35 + 35 + 35 + 60 | 2.86 | 2.86 | 4.91 | — | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 35 + 35 + 35 + 71 | 2.68 | 2.68 | 2.68 | 5.45 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 35 + 35 + 50 + 50 | 2.78 | 2.78 | 3.97 | 3.97 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 35 + 35 + 50 + 60 | 2.63 | 2.63 | 3.75 | 4.50 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3730 | 3920 |
| | 35 + 35 + 50 + 71 | 2.47 | 2.47 | 3.53 | 5.02 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 35 + 35 + 60 + 60 | 2.49 | 2.49 | 4.26 | 4.26 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 35 + 50 + 50 + 50 | 2.55 | 3.65 | 3.65 | 3.65 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| | 35 + 50 + 50 + 60 | 2.42 | 3.46 | 3.46 | 4.15 | — | — | 3.6 | 13.5 | 13.8 | 950 | 3720 | 3920 |
| 5 room | 20 + 20 + 20 + 20 + 20 | 2.70 | 2.70 | 2.70 | 2.70 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3450 | 3470 |
| | 20 + 20 + 20 + 20 + 25 | 2.57 | 2.57 | 3.21 | — | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3450 | 3470 |
| | 20 + 20 + 20 + 20 + 35 | 2.35 | 2.35 | 2.35 | 4.11 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3440 | 3470 |
| | 20 + 20 + 20 + 20 + 50 | 2.08 | 2.08 | 2.08 | 5.19 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 |
| | 20 + 20 + 20 + 20 + 60 | 1.93 | 1.93 | 1.93 | 5.79 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 |
| | 20 + 20 + 20 + 20 + 71 | 1.79 | 1.79 | 1.79 | 6.35 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 20 + 25 + 25 | 2.45 | 2.45 | 3.07 | — | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3450 | 3470 |
| | 20 + 20 + 20 + 25 + 35 | 2.25 | 2.25 | 2.25 | 3.94 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3440 | 3470 |
| | 20 + 20 + 20 + 25 + 50 | 2.00 | 2.00 | 2.50 | 5.00 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 |
| | 20 + 20 + 20 + 25 + 60 | 1.86 | 1.86 | 2.33 | 5.59 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 20 + 25 + 71 | 1.73 | 1.73 | 1.73 | 6.14 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 20 + 35 + 35 | 2.08 | 2.08 | 3.63 | 3.63 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 |
| | 20 + 20 + 20 + 35 + 50 | 1.86 | 1.86 | 3.26 | 4.66 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 20 + 35 + 60 | 1.74 | 1.74 | 3.05 | 5.23 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 20 + 35 + 71 | 1.63 | 1.63 | 1.63 | 5.77 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 20 + 50 + 50 | 1.69 | 1.69 | 1.69 | 4.22 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 20 + 50 + 60 | 1.59 | 1.59 | 1.59 | 3.97 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 20 + 50 + 71 | 1.53 | 1.53 | 1.53 | 4.21 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 25 + 25 + 35 | 2.16 | 2.16 | 2.70 | 3.78 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3440 | 3470 |
| | 20 + 20 + 25 + 25 + 50 | 1.93 | 2.41 | 2.41 | 4.82 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 |
| | 20 + 20 + 25 + 25 + 60 | 1.80 | 1.80 | 2.25 | 5.40 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 25 + 25 + 71 | 1.68 | 1.68 | 2.10 | 5.95 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 25 + 35 + 35 | 2.00 | 2.00 | 2.50 | 3.50 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 |
| | 20 + 20 + 25 + 35 + 50 | 1.80 | 1.80 | 2.25 | 3.15 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 25 + 35 + 60 | 1.69 | 1.69 | 2.11 | 2.95 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 25 + 35 + 71 | 1.58 | 1.58 | 1.97 | 2.76 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 25 + 50 + 50 | 1.64 | 1.64 | 2.05 | 4.09 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 25 + 50 + 60 | 1.54 | 1.54 | 1.93 | 3.86 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 25 + 50 + 71 | 1.45 | 1.45 | 1.81 | 3.63 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 25 + 60 + 60 | 1.46 | 1.46 | 1.82 | 4.38 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 25 + 60 + 70 | 1.38 | 1.38 | 2.42 | 4.15 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 |
| | 20 + 20 + 25 + 60 + 80 | 1.38 | 1.38 | 2.42 | 4.15 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 |
| | 20 + 20 + 25 + 35 + 71 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 50 + 50 | 1.54 | 1.54 | 2.70 | 3.86 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 |
| | 20 + 20 + 35 + 50 + 60 | 1.46 | 1.46 | 2.55 | 3.65 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 50 + 70 | 1.38 | 1.38 | 2.42 | 4.15 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 |
| | 20 + 20 + 35 + 50 + 80 | 1.38 | 1.38 | 2.42 | 4.15 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 |
| | 20 + 20 + 35 + 35 + 71 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 80 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 90 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 100 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 110 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 120 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 130 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 140 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 150 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 |
| | 20 + 20 + 35 + 35 + 160 | 1.49 | 1.49 | 2.61 | 5.30 | — | — | 4.0 | 13.5 | | | | |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | Heating capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-------------------------|-----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|------|
| | Room heating capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | | |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | | |
| 5 room | 20 + 35 + 35 + 50 + 50 | 1.42 | 2.49 | 2.49 | 3.55 | 3.55 | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 | 15.4 | 14.8 | 14.1 |
| | 25 + 25 + 25 + 25 + 25 | 2.70 | 2.70 | 2.70 | 2.70 | 2.70 | — | 4.0 | 13.5 | 13.8 | 1050 | 3440 | 3470 | 15.7 | 15.0 | 14.3 |
| | 25 + 25 + 25 + 35 + 35 | 2.50 | 2.50 | 2.50 | 2.50 | 3.50 | — | 4.0 | 13.5 | 13.8 | 1050 | 3430 | 3470 | 15.6 | 14.9 | 14.3 |
| | 25 + 25 + 25 + 25 + 50 | 2.25 | 2.25 | 2.25 | 2.25 | 4.50 | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 | 15.6 | 14.9 | 14.3 |
| | 25 + 25 + 25 + 25 + 60 | 2.11 | 2.11 | 2.11 | 2.11 | 5.06 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 |
| | 25 + 25 + 25 + 25 + 71 | 1.97 | 1.97 | 1.97 | 5.61 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 25 + 35 + 35 | 2.33 | 2.33 | 2.33 | 3.26 | 3.26 | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 | 15.6 | 14.9 | 14.3 |
| | 25 + 25 + 25 + 35 + 50 | 2.11 | 2.11 | 2.95 | 4.22 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 25 + 35 + 60 | 1.99 | 1.99 | 2.78 | 4.76 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 25 + 35 + 71 | 1.86 | 1.86 | 2.61 | 5.30 | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 25 + 50 + 50 | 1.93 | 1.93 | 1.93 | 3.86 | 3.86 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 |
| | 25 + 25 + 25 + 50 + 60 | 1.82 | 1.82 | 3.65 | 4.38 | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 25 + 60 + 60 | 1.73 | 1.73 | 4.15 | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 | 15.4 | 14.8 | 14.1 | | |
| | 25 + 25 + 35 + 35 + 35 | 2.18 | 2.18 | 3.05 | 3.05 | — | 4.0 | 13.5 | 13.8 | 1050 | 3420 | 3470 | 15.6 | 14.9 | 14.3 | |
| | 25 + 25 + 35 + 35 + 50 | 1.99 | 1.99 | 2.78 | 3.97 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 35 + 35 + 60 | 1.88 | 1.88 | 2.63 | 4.50 | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 35 + 35 + 71 | 1.77 | 1.77 | 2.47 | 5.02 | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 | 15.4 | 14.8 | 14.1 | |
| | 25 + 25 + 35 + 50 + 50 | 1.82 | 1.82 | 3.65 | 3.65 | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 25 + 35 + 50 + 60 | 1.73 | 1.73 | 3.46 | 4.15 | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 | 15.4 | 14.8 | 14.1 | |
| | 25 + 35 + 35 + 35 + 35 | 2.05 | 2.86 | 2.86 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 | | |
| | 25 + 35 + 35 + 50 + 50 | 1.88 | 2.63 | 2.63 | 3.75 | — | 4.0 | 13.5 | 13.8 | 1050 | 3400 | 3470 | 15.5 | 14.8 | 14.2 | |
| | 25 + 35 + 35 + 60 + 60 | 1.78 | 2.49 | 2.49 | 4.26 | — | 4.0 | 13.5 | 13.8 | 1050 | 3390 | 3470 | 15.4 | 14.8 | 14.1 | |
| | 35 + 35 + 35 + 35 + 35 | 2.70 | 2.70 | 2.70 | 2.70 | — | 4.0 | 13.5 | 13.8 | 1050 | 3410 | 3470 | 15.5 | 14.8 | 14.2 | |
| 6 room | 20 + 20 + 20 + 20 + 20 + 20 | 2.25 | 2.25 | 2.25 | 2.25 | 4.5 | 13.5 | 13.8 | 1150 | 3330 | 3420 | 15.2 | 14.5 | 13.9 | | |
| | 20 + 20 + 20 + 20 + 20 + 25 | 2.16 | 2.16 | 2.16 | 2.16 | 4.5 | 13.5 | 13.8 | 1150 | 3330 | 3420 | 15.2 | 14.5 | 13.9 | | |
| | 20 + 20 + 20 + 20 + 20 + 35 | 2.00 | 2.00 | 2.00 | 2.00 | 4.5 | 13.5 | 13.8 | 1150 | 3330 | 3420 | 15.2 | 14.5 | 13.9 | | |
| | 20 + 20 + 20 + 20 + 20 + 50 | 1.80 | 1.80 | 1.80 | 1.80 | 4.50 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 20 + 60 | 1.69 | 1.69 | 1.69 | 5.06 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 20 + 71 | 1.58 | 1.58 | 1.58 | 5.61 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 25 + 25 | 2.08 | 2.08 | 2.08 | 2.60 | 4.5 | 13.5 | 13.8 | 1150 | 3330 | 3420 | 15.2 | 14.5 | 13.9 | | |
| | 20 + 20 + 20 + 20 + 25 + 35 | 1.93 | 1.93 | 1.93 | 3.38 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 25 + 50 | 1.74 | 1.74 | 1.74 | 2.18 | 4.35 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 25 + 60 | 1.64 | 1.64 | 1.64 | 2.05 | 4.91 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 25 + 71 | 1.53 | 1.53 | 1.53 | 1.92 | 5.45 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 35 | 1.80 | 1.80 | 1.80 | 3.15 | 3.15 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 50 | 1.64 | 1.64 | 1.64 | 2.86 | 4.09 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 60 | 1.54 | 1.54 | 1.54 | 2.70 | 4.63 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 71 | 1.45 | 1.45 | 1.45 | 2.41 | 3.38 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 50 | 1.74 | 1.74 | 1.74 | 2.18 | 4.35 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 60 | 1.64 | 1.64 | 1.64 | 2.05 | 4.91 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 71 | 1.53 | 1.53 | 1.53 | 1.92 | 5.45 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 35 | 1.80 | 1.80 | 1.80 | 3.15 | 3.15 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 50 | 1.64 | 1.64 | 1.64 | 2.86 | 4.09 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 60 | 1.54 | 1.54 | 1.54 | 2.70 | 4.63 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 71 | 1.45 | 1.45 | 1.45 | 2.41 | 3.38 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 50 | 1.46 | 1.46 | 1.46 | 2.18 | 4.26 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 60 | 1.38 | 1.38 | 1.38 | 3.46 | 4.15 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 71 | 1.38 | 1.38 | 1.38 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 35 | 1.64 | 1.64 | 1.64 | 2.86 | 2.86 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 50 | 1.50 | 1.50 | 2.63 | 3.75 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 35 + 60 | 1.42 | 1.42 | 2.49 | 4.26 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 35 + 71 | 1.36 | 1.36 | 2.55 | 3.65 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 50 + 50 | 1.38 | 1.38 | 2.18 | 3.05 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 50 + 60 | 1.30 | 1.30 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 50 + 71 | 1.29 | 1.29 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | | |
| | 20 + 20 + 20 + 20 + 35 + 35 | 1.80 | 1.80 | 1.80 | 2.63 | 2.63 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 50 | 1.72 | 1.72 | 1.72 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 60 | 1.64 | 1.64 | 1.64 | 2.18 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 71 | 1.63 | 1.63 | 1.63 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 50 | 1.64 | 1.64 | 1.64 | 2.18 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 60 | 1.56 | 1.56 | 1.56 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 50 + 71 | 1.55 | 1.55 | 1.55 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3320 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 35 | 1.80 | 1.80 | 1.80 | 2.63 | 2.63 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 20 + 20 + 35 + 50 | 1.72 | 1.72 | 1.72 | 2.42 | 3.46 | 4.5 | 13.5 | 13.8 | 1150 | 3310 | 3420 | 15.1 | 14.4 | 13.8 | |
| | 20 + 20 + 2 | | | | | | | | | | | | | | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | |
|-------------------------|--------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | | | | | | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | | | |
| 1 room | 20 | 2.0 | — | — | — | — | — | 1.8 | 2.0 | 2.7 | 650 | 780 | 1100 | 3.6 | 3.4 | 3.3 |
| | 25 | 2.5 | — | — | — | — | — | 1.8 | 2.5 | 3.2 | 650 | 1000 | 1350 | 4.6 | 4.4 | 4.2 |
| | 35 | 3.5 | — | — | — | — | — | 1.8 | 3.5 | 3.7 | 650 | 1500 | 1600 | 6.9 | 6.6 | 6.3 |
| | 50 | 5.0 | — | — | — | — | — | 1.8 | 5.0 | 5.8 | 650 | 2150 | 2500 | 9.9 | 9.4 | 9.0 |
| | 60 | 6.0 | — | — | — | — | — | 1.8 | 6.0 | 6.7 | 650 | 2720 | 3000 | 12.5 | 11.9 | 11.4 |
| | 71 | 7.1 | — | — | — | — | — | 1.8 | 7.1 | 7.2 | 650 | 3250 | 3080 | 14.9 | 14.3 | 13.7 |
| | 20 + 20 | 2.00 | 2.00 | — | — | — | — | 3.0 | 4.0 | 5.4 | 740 | 960 | 1460 | 4.4 | 4.2 | 4.0 |
| | 20 + 25 | 2.00 | 2.50 | — | — | — | — | 3.0 | 4.5 | 5.9 | 740 | 1100 | 1820 | 5.1 | 4.8 | 4.6 |
| | 20 + 35 | 2.00 | 3.50 | — | — | — | — | 3.0 | 5.5 | 6.4 | 740 | 1500 | 2020 | 6.9 | 6.6 | 6.3 |
| | 20 + 50 | 2.00 | 5.00 | — | — | — | — | 3.0 | 7.0 | 8.5 | 740 | 2290 | 2820 | 10.5 | 10.1 | 9.6 |
| 2 room | 20 + 60 | 2.00 | 6.00 | — | — | — | — | 3.0 | 8.0 | 9.4 | 740 | 2660 | 3360 | 12.2 | 11.7 | 11.2 |
| | 20 + 71 | 2.00 | 7.10 | — | — | — | — | 3.0 | 9.1 | 9.9 | 740 | 3100 | 3780 | 14.1 | 13.5 | 12.9 |
| | 25 + 25 | 2.50 | 2.50 | — | — | — | — | 3.0 | 5.0 | 6.8 | 740 | 1420 | 2200 | 6.5 | 6.2 | 6.0 |
| | 25 + 35 | 2.50 | 3.50 | — | — | — | — | 3.0 | 6.0 | 6.9 | 740 | 1810 | 2320 | 8.3 | 7.9 | 7.6 |
| | 25 + 50 | 2.50 | 5.00 | — | — | — | — | 3.0 | 7.5 | 9.0 | 740 | 2470 | 3220 | 11.3 | 10.8 | 10.4 |
| | 25 + 60 | 2.50 | 6.00 | — | — | — | — | 3.0 | 8.5 | 9.4 | 740 | 2810 | 3360 | 12.9 | 12.3 | 11.8 |
| | 25 + 71 | 2.53 | 7.17 | — | — | — | — | 3.0 | 9.7 | 10.4 | 740 | 3350 | 4020 | 15.4 | 14.7 | 14.1 |
| | 35 + 35 | 3.50 | 3.50 | — | — | — | — | 3.0 | 7.0 | 7.4 | 740 | 2290 | 2820 | 10.5 | 10.1 | 9.6 |
| | 35 + 50 | 3.50 | 5.00 | — | — | — | — | 3.0 | 8.5 | 9.5 | 740 | 2810 | 3620 | 12.9 | 12.3 | 11.8 |
| | 35 + 60 | 3.50 | 6.00 | — | — | — | — | 3.0 | 9.5 | 10.4 | 740 | 3280 | 3990 | 15.1 | 14.4 | 13.8 |
| 3 room | 35 + 71 | 3.50 | 7.10 | — | — | — | — | 3.0 | 10.6 | 10.9 | 740 | 3760 | 4250 | 17.1 | 16.3 | 15.7 |
| | 50 + 50 | 5.00 | 5.00 | — | — | — | — | 3.0 | 10.0 | 10.8 | 740 | 3520 | 4050 | 16.2 | 15.5 | 14.8 |
| | 50 + 60 | 5.00 | 6.00 | — | — | — | — | 3.0 | 11.0 | 12.0 | 740 | 3870 | 4410 | 17.8 | 17.0 | 16.3 |
| | 50 + 71 | 4.96 | 7.04 | — | — | — | — | 3.0 | 12.0 | 12.0 | 740 | 4410 | 4410 | 20.0 | 19.2 | 18.4 |
| | 60 + 60 | 6.00 | 6.00 | — | — | — | — | 3.0 | 12.0 | 12.0 | 740 | 4410 | 4410 | 20.2 | 19.4 | 18.6 |
| | 60 + 71 | 5.73 | 6.77 | — | — | — | — | 3.0 | 12.5 | 12.5 | 740 | 4710 | 4710 | 21.4 | 20.5 | 19.6 |
| | 71 + 71 | 6.25 | 6.25 | — | — | — | — | 3.0 | 12.5 | 12.5 | 740 | 4710 | 4710 | 21.2 | 20.3 | 19.4 |
| | 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | — | — | — | 3.7 | 6.0 | 8.1 | 880 | 1530 | 2560 | 7.0 | 6.7 | 6.4 |
| | 20 + 20 + 25 | 2.00 | 2.00 | 2.50 | — | — | — | 3.7 | 6.5 | 8.6 | 880 | 1730 | 2700 | 7.9 | 7.6 | 7.3 |
| | 20 + 20 + 35 | 2.00 | 2.00 | 3.50 | — | — | — | 3.7 | 7.5 | 9.1 | 880 | 2080 | 3120 | 9.6 | 9.1 | 8.8 |
| 4 room | 20 + 20 + 50 | 2.00 | 2.00 | 5.00 | — | — | — | 3.7 | 9.0 | 11.2 | 880 | 2730 | 4120 | 12.5 | 12.0 | 11.5 |
| | 20 + 20 + 60 | 2.00 | 2.00 | 6.00 | — | — | — | 3.7 | 10.0 | 12.1 | 880 | 3280 | 4680 | 15.1 | 14.4 | 13.8 |
| | 20 + 20 + 71 | 2.00 | 2.00 | 7.10 | — | — | — | 3.7 | 11.1 | 12.6 | 880 | 3930 | 4710 | 18.0 | 17.3 | 16.5 |
| | 20 + 25 + 25 | 2.00 | 2.50 | 2.50 | — | — | — | 3.7 | 7.0 | 9.1 | 880 | 1940 | 3210 | 8.9 | 8.5 | 8.2 |
| | 20 + 25 + 35 | 2.00 | 2.50 | 3.50 | — | — | — | 3.7 | 8.0 | 9.6 | 880 | 2440 | 3450 | 11.2 | 10.7 | 10.3 |
| | 20 + 25 + 50 | 2.00 | 2.50 | 5.00 | — | — | — | 3.7 | 9.5 | 11.7 | 880 | 3130 | 4480 | 14.4 | 13.7 | 13.2 |
| | 20 + 25 + 60 | 2.00 | 2.50 | 6.00 | — | — | — | 3.7 | 10.5 | 12.6 | 880 | 3770 | 4800 | 17.3 | 16.6 | 15.9 |
| | 20 + 25 + 71 | 2.00 | 2.50 | 7.10 | — | — | — | 3.7 | 11.6 | 12.6 | 880 | 4210 | 4800 | 19.1 | 18.3 | 17.5 |
| | 20 + 35 + 35 | 2.00 | 3.50 | 3.50 | — | — | — | 3.7 | 9.0 | 10.1 | 880 | 2920 | 3850 | 13.4 | 12.8 | 12.3 |
| | 20 + 35 + 50 | 2.00 | 3.50 | 5.00 | — | — | — | 3.7 | 10.5 | 12.0 | 880 | 3770 | 4450 | 17.3 | 16.6 | 15.9 |
| Cooling operation | 20 + 35 + 60 | 2.00 | 3.50 | 6.00 | — | — | — | 3.7 | 11.5 | 12.6 | 880 | 4150 | 4800 | 19.1 | 18.2 | 17.5 |
| | 20 + 35 + 71 | 1.98 | 3.47 | 7.04 | — | — | — | 4.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.2 | 20.3 | 19.5 |
| | 20 + 50 + 50 | 2.00 | 5.00 | 5.00 | — | — | — | 3.7 | 12.0 | 12.6 | 880 | 4440 | 4800 | 20.4 | 19.5 | 18.7 |
| | 20 + 50 + 60 | 1.92 | 4.81 | 5.77 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 20 + 50 + 71 | 1.77 | 4.43 | 6.29 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 20 + 60 + 60 | 1.79 | 5.36 | 5.36 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 20 + 60 + 71 | 1.66 | 4.97 | 5.88 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 20 + 71 + 71 | 1.54 | 5.48 | 5.48 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4660 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 25 + 25 | 2.50 | 2.50 | 2.50 | — | — | — | 3.7 | 7.5 | 9.6 | 880 | 2130 | 3640 | 9.8 | 9.4 | 9.0 |
| | 25 + 25 + 35 | 2.50 | 2.50 | 3.50 | — | — | — | 3.7 | 8.5 | 10.1 | 880 | 2650 | 3900 | 12.2 | 11.6 | 11.2 |
| 3 room | 25 + 25 + 50 | 2.50 | 2.50 | 5.00 | — | — | — | 3.7 | 10.0 | 12.6 | 880 | 3420 | 4800 | 15.7 | 15.0 | 14.4 |
| | 25 + 25 + 60 | 2.50 | 2.50 | 6.00 | — | — | — | 3.7 | 11.0 | 12.6 | 880 | 3910 | 4800 | 18.0 | 17.2 | 16.5 |
| | 25 + 25 + 71 | 2.58 | 2.58 | 7.33 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.2 | 20.3 | 19.5 |
| | 25 + 35 + 35 | 2.50 | 3.50 | 3.50 | — | — | — | 3.7 | 9.5 | 10.4 | 880 | 3130 | 3910 | 14.4 | 13.7 | 13.2 |
| | 25 + 35 + 50 | 2.50 | 3.50 | 5.00 | — | — | — | 3.7 | 11.0 | 12.6 | 880 | 3910 | 4800 | 18.0 | 17.2 | 16.5 |
| | 25 + 35 + 60 | 2.50 | 3.50 | 6.00 | — | — | — | 3.7 | 12.0 | 12.6 | 880 | 4440 | 4800 | 20.4 | 19.5 | 18.7 |
| | 25 + 35 + 71 | 2.39 | 3.34 | 6.77 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 25 + 50 + 50 | 2.50 | 5.00 | 5.00 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 25 + 50 + 60 | 2.31 | 4.63 | 5.56 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 25 + 50 + 71 | 2.14 | 4.28 | 6.08 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| 4 room | 25 + 60 + 60 | 2.16 | 5.17 | 5.17 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 25 + 60 + 71 | 2.00 | 4.81 | 5.69 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 25 + 71 + 71 | 1.87 | 5.31 | 5.31 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 35 + 35 + 35 | 3.50 | 3.50 | 3.50 | — | — | — | 3.7 | 10.5 | 10.9 | 880 | 3770 | 4180 | 17.3 | 16.6 | 15.9 |
| | 35 + 35 + 50 | 3.50 | 3.50 | 5.00 | — | — | — | 3.7 | 12.0 | 12.6 | 880 | 4440 | 4800 | 20.4 | 19.5 | 18.7 |
| | 35 + 35 + 60 | 3.37 | 3.37 | 5.77 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 35 + 35 + 71 | 3.10 | 3.10 | 6.29 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4660 | 4800 | 21.2 | 20.3 | 19.4 |
| | 35 + 50 + 50 | 3.24 | 4.63 | 4.63 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4670 | 4800 | 21.4 | 20.5 | 19.7 |
| | 35 + 50 + 60 | 3.02 | 4.31 | 5.17 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4660 | 4800 | 21.4 | 20.5 | 19.6 |
| | 35 + 50 + 71 | 2.80 | 4.01 | 5.69 | — | — | — | 3.7 | 12.5 | 12.6 | 880 | 4660 | 4800 | 21.4 | 20.5 | 19.6 |

INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-------------------------|----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|--------|------|------|------|------|
| | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | | |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | | |
| 4 room | 20 + 20 + 35 + 60 | 1.85 | 1.85 | 3.24 | 5.56 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 20 + 35 + 71 | 1.71 | 1.71 | 3.00 | 6.08 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 20 + 50 + 50 | 1.79 | 1.79 | 4.46 | 4.46 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 20 + 50 + 60 | 1.67 | 1.67 | 4.17 | 5.00 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 20 + 50 + 71 | 1.55 | 1.55 | 3.88 | 5.51 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 20 + 60 + 60 | 1.56 | 1.56 | 4.69 | 4.69 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 20 + 60 + 71 | 1.46 | 1.46 | 4.39 | 5.19 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 20 + 71 + 71 | 1.37 | 1.37 | 4.88 | 4.88 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 20 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 9.5 | 12.8 | 1100 | 2900 | 4800 | 13.2 | 12.6 | 12.1 |
| | 20 + 25 + 25 + 35 | 2.00 | 2.50 | 2.50 | 3.50 | — | — | 4.4 | 10.5 | 12.8 | 1100 | 3440 | 4800 | 15.7 | 15.0 | 14.3 |
| | 20 + 25 + 25 + 50 | 2.00 | 2.50 | 2.50 | 5.00 | — | — | 4.4 | 12.0 | 12.8 | 1100 | 4100 | 4800 | 18.7 | 17.8 | 17.1 |
| | 20 + 25 + 25 + 60 | 1.92 | 2.40 | 2.40 | 5.77 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4740 | 4800 | 21.6 | 20.6 | 19.8 |
| | 20 + 25 + 25 + 71 | 1.82 | 2.26 | 2.26 | 6.16 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 25 + 35 + 35 | 2.00 | 2.50 | 3.50 | 3.50 | — | — | 4.4 | 11.5 | 12.8 | 1100 | 3830 | 4800 | 17.4 | 16.7 | 16.0 |
| | 20 + 25 + 35 + 50 | 1.92 | 2.40 | 3.37 | 4.81 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4740 | 4800 | 21.6 | 20.6 | 19.8 |
| | 20 + 25 + 35 + 60 | 1.79 | 2.23 | 3.13 | 5.36 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 25 + 35 + 71 | 1.66 | 2.07 | 2.90 | 5.88 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 25 + 50 + 50 | 1.72 | 2.16 | 4.31 | 4.31 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 25 + 50 + 60 | 1.61 | 2.02 | 4.03 | 4.84 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 25 + 50 + 71 | 1.51 | 1.88 | 3.77 | 5.35 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 25 + 60 + 60 | 1.52 | 1.89 | 4.55 | 4.55 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 25 + 60 + 71 | 1.42 | 1.78 | 4.26 | 5.04 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 25 + 71 + 71 | 1.34 | 1.67 | 4.75 | 4.75 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4700 | 4800 | 21.4 | 20.5 | 19.6 |
| | 20 + 35 + 35 + 35 | 2.00 | 3.50 | 3.50 | 3.50 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4740 | 4800 | 21.6 | 20.6 | 19.8 |
| | 20 + 35 + 35 + 50 | 1.79 | 3.13 | 3.13 | 4.46 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 35 + 35 + 60 | 1.67 | 2.92 | 2.92 | 5.00 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 20 + 35 + 35 + 71 | 1.55 | 2.72 | 2.72 | 5.51 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 35 + 50 + 50 | 1.61 | 2.82 | 4.03 | 4.03 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 35 + 50 + 60 | 1.52 | 2.65 | 3.79 | 4.55 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 35 + 50 + 71 | 1.42 | 2.49 | 3.55 | 5.04 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 35 + 60 + 60 | 1.43 | 2.50 | 4.29 | 4.29 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 20 + 35 + 60 + 71 | 1.34 | 2.35 | 4.03 | 4.77 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 20 + 50 + 50 + 50 | 1.47 | 3.68 | 3.68 | 3.68 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 20 + 50 + 50 + 60 | 1.39 | 3.47 | 3.47 | 4.17 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 20 + 50 + 50 + 71 | 1.31 | 3.27 | 3.27 | 4.65 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4700 | 4800 | 21.4 | 20.5 | 19.6 |
| | 20 + 50 + 60 + 60 | 1.32 | 3.29 | 3.95 | 3.95 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4700 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 25 + 25 + 25 | 2.50 | 2.50 | 2.50 | 2.50 | — | — | 4.4 | 10.0 | 12.8 | 1100 | 3210 | 4800 | 14.6 | 14.0 | 13.4 |
| | 25 + 25 + 25 + 35 | 2.50 | 2.50 | 2.50 | 3.50 | — | — | 4.4 | 11.0 | 12.8 | 1100 | 3580 | 4800 | 16.3 | 15.6 | 14.9 |
| | 25 + 25 + 25 + 50 | 2.50 | 2.50 | 2.50 | 5.00 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4740 | 4800 | 21.6 | 20.6 | 19.8 |
| | 25 + 25 + 25 + 60 | 2.31 | 2.31 | 2.31 | 5.56 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 25 + 25 + 25 + 71 | 2.14 | 2.14 | 2.14 | 6.08 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 25 + 25 + 35 + 35 | 2.50 | 2.50 | 3.50 | 3.50 | — | — | 4.4 | 12.0 | 12.8 | 1100 | 4100 | 4800 | 18.7 | 17.8 | 17.1 |
| | 25 + 25 + 35 + 50 | 2.31 | 2.31 | 3.24 | 4.63 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 25 + 25 + 35 + 60 | 2.16 | 2.16 | 3.02 | 5.17 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 25 + 25 + 35 + 71 | 2.00 | 2.00 | 2.80 | 5.69 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 25 + 50 + 50 | 2.08 | 2.08 | 4.17 | 4.17 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 25 + 25 + 50 + 60 | 1.95 | 1.95 | 3.91 | 4.69 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 25 + 50 + 71 | 1.83 | 1.83 | 3.65 | 5.19 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 25 + 60 + 60 | 1.84 | 1.84 | 4.41 | 4.41 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 25 + 60 + 71 | 1.73 | 1.73 | 4.14 | 4.90 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 25 + 71 + 71 | 1.63 | 1.63 | 4.62 | 4.62 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4700 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 35 + 35 + 35 | 2.40 | 3.37 | 3.37 | 3.37 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4740 | 4800 | 21.6 | 20.6 | 19.8 |
| | 25 + 35 + 35 + 50 | 2.16 | 3.02 | 4.31 | 4.31 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 25 + 35 + 35 + 60 | 1.88 | 2.64 | 2.64 | 5.35 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 35 + 35 + 71 | 1.73 | 2.73 | 3.91 | 3.91 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 35 + 50 + 50 | 1.95 | 2.73 | 3.91 | 3.91 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 35 + 50 + 60 | 1.84 | 2.57 | 3.68 | 4.41 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720 | 4800 | 21.5 | 20.5 | 19.7 |
| | 25 + 35 + 50 + 71 | 1.73 | 2.42 | 3.45 | 4.90 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 35 + 60 + 60 | 1.74 | 2.43 | 4.17 | 4.17 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 35 + 60 + 71 | 1.64 | 2.29 | 3.93 | 4.65 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4700 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 50 + 50 + 50 | 1.79 | 3.57 | 3.57 | 3.57 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 50 + 50 + 60 | 1.69 | 3.38 | 3.38 | 4.05 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4710 | 4800 | 21.4 | 20.5 | 19.6 |
| | 25 + 50 + 60 + 60 | 1.60 | 3.21 | 3.85 | 3.85 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4700 | 4800 | 21.4 | 20.5 | 19.6 |
| | 35 + 35 + 35 + 35 | 3.13 | 3.13 | 3.13 | 3.13 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4730 | 4800 | 21.5 | 20.6 | 19.7 |
| | 35 + 35 + 35 + 50 | 2.82 | 2.82 | 4.03 | 4.03 | — | — | 4.4 | 12.5 | 12.8 | 1100 | 4720</ | | | | |

Combinations

| Indoor unit combination | | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-------------------------|--------|-----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|------|
| | | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | 220V | 230V | 240V | |
| | | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | Min. | Standard | Max. | 220V | 230V | 240V | |
| Cooling operation | 5 room | 20 + 20 + 25 + 25 + 25 | 2.00 | 2.00 | 2.50 | 2.50 | 2.50 | — | 5.1 | 11.5 | 13.3 | 1210 | 3710 | 4800 | 16.9 | 16.1 | 15.5 |
| | | 20 + 20 + 25 + 25 + 35 | 2.00 | 2.00 | 2.50 | 2.50 | 3.50 | — | 5.1 | 12.5 | 13.3 | 1210 | 4440 | 4800 | 20.2 | 19.3 | 18.5 |
| | | 20 + 20 + 25 + 25 + 50 | 1.79 | 1.79 | 2.23 | 2.23 | 4.46 | — | 5.1 | 12.5 | 13.3 | 1210 | 4420 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 20 + 25 + 25 + 60 | 1.67 | 1.67 | 2.08 | 2.08 | 5.00 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 20 + 25 + 25 + 71 | 1.55 | 1.55 | 1.94 | 1.94 | 5.51 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 20 + 25 + 35 + 35 | 1.85 | 1.85 | 2.31 | 3.24 | 3.24 | — | 5.1 | 12.5 | 13.3 | 1210 | 4430 | 4800 | 20.2 | 19.3 | 18.5 |
| | | 20 + 20 + 25 + 35 + 50 | 1.67 | 1.67 | 2.08 | 2.92 | 4.17 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 20 + 25 + 35 + 60 | 1.56 | 1.56 | 1.95 | 2.73 | 4.69 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 20 + 25 + 35 + 71 | 1.46 | 1.46 | 1.83 | 2.56 | 5.19 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 20 + 25 + 50 + 50 | 1.52 | 1.52 | 1.89 | 3.79 | 3.79 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 20 + 25 + 50 + 60 | 1.43 | 1.43 | 1.79 | 3.57 | 4.29 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 20 + 25 + 50 + 71 | 1.34 | 1.34 | 1.68 | 3.36 | 4.77 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 20 + 25 + 60 + 60 | 1.35 | 1.35 | 1.69 | 4.05 | 4.05 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 20 + 35 + 35 + 35 | 1.72 | 1.72 | 3.02 | 3.02 | — | 5.1 | 12.5 | 13.3 | 1210 | 4420 | 4800 | 20.1 | 19.2 | 18.4 | |
| | | 20 + 20 + 35 + 35 + 50 | 1.56 | 1.56 | 2.73 | 2.73 | 3.91 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 20 + 35 + 35 + 60 | 1.47 | 1.47 | 2.57 | 2.57 | 4.41 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 20 + 35 + 35 + 71 | 1.38 | 1.38 | 2.42 | 2.42 | 4.90 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 20 + 35 + 50 + 50 | 1.43 | 1.43 | 2.50 | 3.57 | 3.57 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 20 + 35 + 50 + 60 | 1.35 | 1.35 | 2.36 | 4.05 | 4.05 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 20 + 35 + 50 + 71 | 1.28 | 1.28 | 2.24 | 3.85 | 3.85 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 20 + 50 + 50 + 50 | 1.32 | 1.32 | 3.29 | 3.29 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 | |
| | | 20 + 25 + 25 + 25 + 25 | 2.00 | 2.50 | 2.50 | 2.50 | — | 5.1 | 12.0 | 13.3 | 1210 | 4090 | 4800 | 18.6 | 17.8 | 17.1 | |
| | | 20 + 25 + 25 + 25 + 35 | 1.92 | 2.40 | 2.40 | 3.37 | — | 5.1 | 12.5 | 13.3 | 1210 | 4430 | 4800 | 20.2 | 19.3 | 18.5 | |
| | | 20 + 25 + 25 + 25 + 50 | 1.72 | 2.16 | 2.16 | 4.31 | — | 5.1 | 12.5 | 13.3 | 1210 | 4420 | 4800 | 20.1 | 19.2 | 18.4 | |
| | | 20 + 25 + 25 + 25 + 60 | 1.61 | 2.02 | 2.02 | 4.84 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 | |
| | | 20 + 25 + 25 + 25 + 71 | 1.51 | 1.88 | 1.88 | 5.35 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 | |
| | | 20 + 25 + 25 + 35 + 35 | 1.79 | 2.23 | 2.23 | 3.13 | — | 5.1 | 12.5 | 13.3 | 1210 | 4420 | 4800 | 20.1 | 19.2 | 18.4 | |
| | | 20 + 25 + 25 + 35 + 50 | 1.61 | 2.02 | 2.02 | 2.82 | 4.03 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 25 + 25 + 35 + 60 | 1.52 | 1.89 | 1.89 | 2.65 | 4.55 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 25 + 25 + 35 + 71 | 1.42 | 1.78 | 1.78 | 5.04 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 | |
| | | 20 + 25 + 25 + 50 + 50 | 1.47 | 1.84 | 1.84 | 3.68 | 3.68 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 25 + 25 + 50 + 60 | 1.39 | 1.74 | 1.74 | 3.47 | 4.17 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 25 + 50 + 71 | 1.31 | 1.64 | 1.64 | 3.27 | 4.65 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 25 + 25 + 60 + 60 | 1.32 | 1.64 | 1.64 | 3.95 | 3.95 | — | 5.1 | 12.5 | 13.3 | 1210 | 4420 | 4800 | 20.1 | 19.2 | 18.4 |
| | | 20 + 25 + 25 + 35 + 35 | 1.67 | 2.08 | 2.92 | 2.92 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 | |
| | | 20 + 25 + 35 + 35 + 50 | 1.52 | 1.89 | 2.65 | 2.65 | 3.79 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 25 + 35 + 35 + 60 | 1.43 | 1.79 | 2.50 | 2.50 | 4.29 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 35 + 71 | 1.34 | 1.74 | 2.35 | 2.35 | 4.77 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 50 + 50 | 1.35 | 2.50 | 2.50 | 3.57 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 | |
| | | 20 + 25 + 35 + 50 + 60 | 1.36 | 2.36 | 2.36 | 4.05 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 | |
| | | 20 + 25 + 35 + 50 + 71 | 1.34 | 1.68 | 2.35 | 2.35 | 4.77 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 50 + 50 | 1.39 | 1.74 | 2.43 | 3.47 | 3.47 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 50 + 60 | 1.32 | 1.64 | 1.64 | 3.27 | 4.65 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 50 + 71 | 1.31 | 1.73 | 2.42 | 4.90 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 | |
| | | 20 + 25 + 50 + 50 + 50 | 1.43 | 1.79 | 1.79 | 3.57 | 3.57 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 25 + 50 + 50 + 60 | 1.69 | 1.69 | 1.69 | 3.38 | 4.05 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 50 + 60 + 60 | 1.60 | 1.60 | 1.60 | 3.85 | 3.85 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 35 + 35 | 2.02 | 2.02 | 2.82 | 2.82 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 | |
| | | 20 + 25 + 35 + 35 + 50 | 1.84 | 1.84 | 2.43 | 2.57 | 3.68 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 25 + 35 + 35 + 60 | 1.74 | 1.74 | 2.43 | 2.43 | 4.17 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 35 + 71 | 1.64 | 1.64 | 2.29 | 2.29 | 4.65 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 50 + 50 | 1.69 | 1.69 | 2.36 | 3.38 | 4.05 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 50 + 60 | 1.60 | 1.60 | 1.60 | 3.85 | 3.85 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 35 + 35 | 2.02 | 2.02 | 2.82 | 2.82 | — | 5.1 | 12.5 | 13.3 | 1210 | 4410 | 4800 | 20.1 | 19.2 | 18.4 | |
| | | 20 + 25 + 35 + 35 + 50 | 1.84 | 1.84 | 2.57 | 2.57 | 3.68 | — | 5.1 | 12.5 | 13.3 | 1210 | 4400 | 4800 | 20.0 | 19.1 | 18.4 |
| | | 20 + 25 + 35 + 35 + 60 | 1.74 | 1.74 | 2.43 | 2.43 | 4.17 | — | 5.1 | 12.5 | 13.3 | 1210 | 4390 | 4800 | 20.0 | 19.1 | 18.3 |
| | | 20 + 25 + 35 + 35 + 71 | 1.64 | 1.64 | 2.29 | 2.29 | 4.65 | — | 5.1 | 12.5 | 13.3 | 1210 | 4380 | 4800 | 19.9 | 19.1 | 18.3 |
| | | 20 + 20 + 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | 5.5 | — | 12.0 | 13.6 | 1280 | 3750 | 4620 | 17.1 | 16.3 | 15.6 | |
| 6 room | 6 room | 20 + 20 + 20 + 20 + 20 + 20 | 2.00 | 2.00 | 2.00 | 2.00 | 5.5 | — | 12.0 | 13.6 | 1280 | 4010 | 4800 | 18.2 | 1 | | |


INVERTER MULTI-SPLIT SYSTEM

| Indoor unit combination | Cooling capacity (kW) | | | | | | Power consumption (W) | | | Standard current (A) | | | | | | |
|-----------------------------|-----------------------------|--------|--------|--------|--------|--------|-----------------------|----------|------|----------------------|----------|------|------|------|------|------|
| | Room cooling capacity (kW) | | | | | | Total capacity (kW) | | | Min. | Standard | Max. | | | | |
| | A room | B room | C room | D room | E room | F room | Min. | Standard | Max. | | | | | | | |
| Cooling operation 6 room | 20 + 20 + 20 + 25 + 50 + 50 | 1.35 | 1.35 | 1.35 | 1.69 | 3.38 | 3.38 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 20 + 25 + 50 + 60 | 1.28 | 1.28 | 1.28 | 1.60 | 3.21 | 3.85 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 20 + 35 + 35 + 35 | 1.52 | 1.52 | 1.52 | 2.65 | 2.65 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 | |
| | 20 + 20 + 20 + 35 + 35 + 50 | 1.39 | 1.39 | 1.39 | 2.43 | 2.43 | 3.47 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 20 + 35 + 35 + 60 | 1.32 | 1.32 | 1.32 | 2.30 | 2.30 | 3.95 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 20 + 35 + 35 + 60 | 1.28 | 1.28 | 1.28 | 2.24 | 3.21 | 3.21 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 25 + 25 + 50 | 1.79 | 1.79 | 2.23 | 2.23 | 2.23 | 2.23 | 5.5 | 12.5 | 13.8 | 1280 | 4000 | 4800 | 18.2 | 17.4 | 16.7 |
| | 20 + 20 + 25 + 25 + 25 + 35 | 1.67 | 1.67 | 2.08 | 2.08 | 2.08 | 2.92 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 |
| | 20 + 20 + 25 + 25 + 25 + 50 | 1.52 | 1.52 | 1.89 | 1.89 | 1.89 | 3.79 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 |
| | 20 + 20 + 25 + 25 + 25 + 60 | 1.43 | 1.43 | 1.79 | 1.79 | 4.29 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 20 + 20 + 25 + 25 + 71 | 1.34 | 1.34 | 1.68 | 1.68 | 1.68 | 4.77 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 25 + 35 + 35 | 1.56 | 1.56 | 1.95 | 1.95 | 2.73 | 2.73 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 |
| | 20 + 20 + 25 + 25 + 35 + 50 | 1.43 | 1.43 | 1.79 | 1.79 | 2.50 | 3.57 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 25 + 35 + 60 | 1.35 | 1.35 | 1.69 | 1.69 | 2.36 | 4.05 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 25 + 50 + 50 | 1.32 | 1.32 | 1.64 | 1.64 | 3.29 | 3.29 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 35 + 35 + 35 | 1.47 | 1.47 | 1.84 | 2.57 | 2.57 | 2.57 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 35 + 35 + 50 | 1.35 | 1.35 | 1.69 | 2.36 | 2.36 | 3.38 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 25 + 35 + 60 | 1.28 | 1.28 | 1.60 | 2.24 | 2.24 | 3.85 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 35 + 35 + 35 + 35 | 1.39 | 1.39 | 2.43 | 2.43 | 2.43 | 2.43 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 20 + 35 + 35 + 35 + 50 | 1.28 | 1.28 | 2.24 | 2.24 | 3.21 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 20 + 25 + 25 + 25 + 25 + 25 | 1.72 | 2.16 | 2.16 | 2.16 | 2.16 | 5.5 | 12.5 | 13.8 | 1280 | 4000 | 4800 | 18.2 | 17.4 | 16.7 | |
| | 20 + 25 + 25 + 25 + 25 + 35 | 1.61 | 2.02 | 2.02 | 2.02 | 2.82 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 | |
| | 20 + 25 + 25 + 25 + 50 + 50 | 1.47 | 1.84 | 1.84 | 1.84 | 3.68 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 20 + 25 + 25 + 25 + 50 + 60 | 1.39 | 1.74 | 1.74 | 1.74 | 4.17 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 20 + 25 + 25 + 25 + 25 + 71 | 1.31 | 1.64 | 1.64 | 1.64 | 4.65 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 20 + 25 + 25 + 25 + 35 + 35 | 1.52 | 1.89 | 1.89 | 1.89 | 2.65 | 2.65 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 |
| | 20 + 25 + 25 + 25 + 35 + 50 | 1.39 | 1.74 | 1.74 | 1.74 | 3.47 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 20 + 25 + 25 + 25 + 50 + 60 | 1.32 | 1.64 | 1.64 | 1.64 | 2.30 | 3.95 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 25 + 25 + 25 + 25 + 50 | 1.28 | 1.60 | 1.60 | 1.60 | 3.21 | 3.21 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 25 + 25 + 35 + 35 + 35 | 1.43 | 1.79 | 1.79 | 2.50 | 2.50 | 2.50 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 25 + 25 + 35 + 35 + 50 | 1.32 | 1.64 | 1.64 | 2.30 | 2.30 | 3.29 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 25 + 35 + 35 + 35 + 35 | 1.35 | 1.69 | 2.36 | 2.36 | 2.36 | 2.36 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 20 + 35 + 35 + 35 + 35 + 35 | 1.28 | 2.24 | 2.24 | 2.24 | 2.24 | 2.24 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 25 + 25 + 25 + 25 + 25 + 25 | 2.16 | 2.16 | 2.16 | 2.16 | 2.16 | 2.16 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 |
| | 25 + 25 + 25 + 25 + 25 + 35 | 1.95 | 1.95 | 1.95 | 1.95 | 2.73 | 5.5 | 12.5 | 13.8 | 1280 | 3990 | 4800 | 18.2 | 17.4 | 16.6 | |
| | 25 + 25 + 25 + 25 + 25 + 50 | 1.79 | 1.79 | 1.79 | 1.79 | 3.57 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 25 + 25 + 25 + 25 + 25 + 60 | 1.69 | 1.69 | 1.69 | 1.69 | 4.05 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 | |
| | 25 + 25 + 25 + 25 + 35 + 35 | 1.84 | 1.84 | 1.84 | 1.84 | 2.57 | 2.57 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 25 + 25 + 25 + 25 + 25 + 50 | 1.69 | 1.69 | 1.69 | 1.69 | 2.36 | 3.38 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 25 + 25 + 25 + 25 + 35 + 60 | 1.60 | 1.60 | 1.60 | 1.60 | 2.24 | 3.85 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 25 + 25 + 25 + 35 + 35 + 35 | 1.74 | 1.74 | 1.74 | 2.43 | 2.43 | 2.43 | 5.5 | 12.5 | 13.8 | 1280 | 3980 | 4800 | 18.1 | 17.3 | 16.6 |
| | 25 + 25 + 25 + 35 + 35 + 50 | 1.60 | 1.60 | 1.60 | 2.24 | 2.24 | 3.21 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |
| | 25 + 25 + 25 + 35 + 35 + 60 | 1.64 | 1.64 | 2.30 | 2.30 | 2.30 | 2.30 | 5.5 | 12.5 | 13.8 | 1280 | 3970 | 4800 | 18.1 | 17.3 | 16.6 |

Control option

Wired remote control can be connected


| Model | Interface | Remote Control |
|--|--------------|------------------|
| SRK63/71HE-S1 | not required | RC-E1R |
| SRK20~60ZJX-S/S1/S2 SRK63/71/80ZK-S SRK20~50ZJ-S SRF25/35/50ZJX-S/S1 SRR25/35/50/60ZJ-S/S1 | SC-BIKN-E | RC-E5 RC-EX1A |
| FDTC25~60VF ※ FDUM50VF FDEN50VF | not required | |

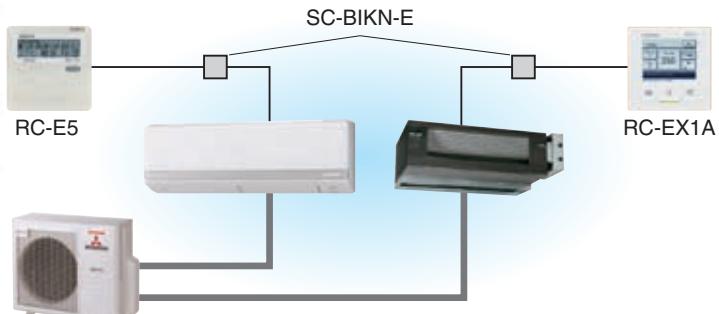

※ If wireless remote control is required, use RCN-TC-24W-ER

Can be connected to SUPERLINK-II

| Model | Interface | Remote Control |
|--|------------------------|------------------|
| SRK20~60ZJX-S/S1/S2 SRK63/71/80ZK-S SRK20~50ZJ-S SRF25/35/50ZJX-S/S1 SRR25/35/50/60ZJ-S/S1 | SC-BIKN-E SC-ADNA-E | RC-E5 RC-EX1A |
| FDTC25~60VF FDUM50VF FDEN50VF | SC-ADNA-E | |

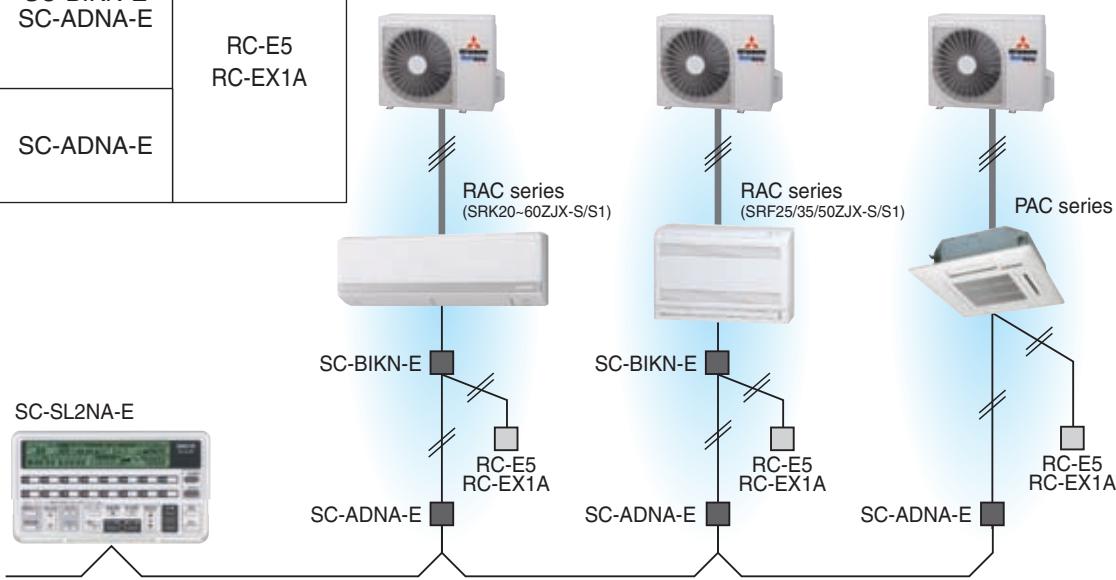

External switch connection CnT

All indoor units are equipped with an additional connection point - CnT - to connect indoor units to an external ON/OFF switch; e.g. time clock, fire alarm, etc.

| Model | Interface |
|--|--------------|
| SRK63/71HE-S1 FDTC25~60VF FDUM50VF FDEN50VF | not required |
| SRK20~60ZJX-S/S1/S2 SRK63/71/80ZK-S SRK20~50ZJ-S SRF25/35/50ZJX-S/S1 SRR25/35/50/60ZJ-S/S1 | SC-BIKN-E |



Remote surveillance system



Card key on-off



Humidifier linkage

For EU/EEA area only

Based on European regulations listed below, please refer the following specification table.

No.626/2011 of 4 May 2011: energy labeling of air-conditioners (below cooling capacity 12kW)

No.206/2012 of 6 March 2012: requirement for air-conditioners and comfort fans

| | | | | | | | | |
|--|------------|------------|------------|-------------|--------------|-----------|-----------|-----------|
| Indoor unit | SRK20ZJX-S | SRK25ZJX-S | SRK35ZJX-S | SRK50ZJX-S1 | SRK60ZJX-S2 | SRK63ZK-S | SRK71ZK-S | SRK80ZK-S |
| Outdoor unit | SRC20ZJX-S | SRC25ZJX-S | SRC35ZJX-S | SRC50ZJX-S | SRC60ZJX-S | SRC63ZK-S | SRC71ZK-S | SRC80ZK-S |
| Energy class (cooling/heating) | A++/A+ | A++/A+ | A++/A+ | A++/A++ | A+/A+ | A++/A+ | A+/A+ | A+/A |
| SEER | 6.94 | 7.18 | 6.97 | 6.25 | 5.68 | 6.30 | 6.06 | 5.71 |
| SCOP (Average climate) | 4.13 | 4.26 | 4.27 | 4.60 | 4.36 | 4.11 | 4.03 | 3.97 |
| Pdesignc | kW | 2.00 | 2.55 | 3.50 | 5.00 | 6.10 | 6.30 | 7.10 |
| Pdesignh (@-10°C) | kW | 2.70 | 2.90 | 3.30 | 5.30 | 6.10 | 7.10 | 7.90 |
| Annual electricity consumption (cooling/heating) | kWh/a | 101/915 | 125/954 | 176/1082 | 280/1614 | 376/1960 | 351/2421 | 411/2643 |
| Refrigerant (GWP) | | | | | R410A (1975) | | | |
| Designated heating season | | | | | Average | | | |

| | | | | | | | |
|--|-----------|-----------|-----------|-----------|--------------|------------|------------|
| Indoor unit | SRK20ZJ-S | SRK25ZJ-S | SRK35ZJ-S | SRK50ZJ-S | SRK25ZMP-S | SRK35ZMP-S | SRK45ZMP-S |
| Outdoor unit | SRC20ZJ-S | SRC25ZJ-S | SRC35ZJ-S | SRC50ZJ-S | SRC25ZMP-S | SRC35ZMP-S | SRC45ZMP-S |
| Energy class (cooling/heating) | A++/A+ | A++/A+ | A++/A+ | A++/A+ | A/A | A++/A+ | A/A |
| SEER | 6.45 | 6.59 | 6.87 | 6.10 | 5.50 | 6.15 | 5.38 |
| SCOP (Average climate) | 4.05 | 4.16 | 4.17 | 4.07 | 3.82 | 4.00 | 3.81 |
| Pdesignc | kW | 2.00 | 2.50 | 3.50 | 5.00 | 2.50 | 3.20 |
| Pdesignh (@-10°C) | kW | 2.80 | 2.90 | 3.20 | 4.70 | 2.80 | 3.00 |
| Annual electricity consumption (cooling/heating) | kWh/a | 109/967 | 133/977 | 179/1074 | 287/1616 | 160/1027 | 183/1052 |
| Refrigerant (GWP) | | | | | R410A (1975) | | |
| Designated heating season | | | | | Average | | |

| | | | | | |
|--|------------|------------|-------------|--------------|------------|
| Indoor unit | SRF25ZJX-S | SRF35ZJX-S | SRF50ZJX-S1 | SRR25ZJ-S | SRR35ZJ-S |
| Outdoor unit | SRC25ZJX-S | SRC35ZJX-S | SRC50ZJX-S | SRC25ZJX-S | SRC35ZJX-S |
| Energy class (cooling/heating) | A++/A | A++/A+ | A+/A+ | A++/A | A++/A+ |
| SEER | 6.40 | 6.67 | 6.01 | 6.12 | 6.33 |
| SCOP (Average climate) | 4.01 | 4.10 | 4.07 | 3.96 | 4.05 |
| Pdesignc | kW | 2.50 | 3.50 | 5.00 | 2.50 |
| Pdesignh (@-10°C) | kW | 2.90 | 3.30 | 5.00 | 2.90 |
| Annual electricity consumption (cooling/heating) | kWh/a | 137/1014 | 184/1128 | 292/1722 | 144/1025 |
| Refrigerant (GWP) | | | | R410A (1975) | |
| Designated heating season | | | | Average | |

| | | | | | |
|--|------------|------------|------------|--------------|------------|
| Indoor unit | FDT25VF | FDT35VF | FDT40VF | FDT50VF | FDT60VF |
| Outdoor unit | SRC25ZJX-S | SRC35ZJX-S | SRC40ZJX-S | SRC50ZJX-S | SRC60ZJX-S |
| Energy class (cooling/heating) | A+/A | A++/A+ | A++/A | A+/A | A+/A |
| SEER | 6.02 | 6.29 | 6.49 | 5.99 | 5.74 |
| SCOP (Average climate) | 3.98 | 4.04 | 3.96 | 3.85 | 3.81 |
| Pdesignc | kW | 2.55 | 3.60 | 4.00 | 5.00 |
| Pdesignh (@-10°C) | kW | 2.90 | 3.30 | 4.00 | 4.80 |
| Annual electricity consumption (cooling/heating) | kWh/a | 149/1020 | 201/1145 | 216/1415 | 293/1744 |
| Refrigerant (GWP) | | | | R410A (1975) | |
| Designated heating season | | | | Average | |

Inverter Multi-split System



| | | | | | | | |
|--|----------------|------------------------|----------------|----------------|----------------|----------------|----------------|
| Indoor unit | SRK20ZJX-S x 2 | SRK20ZJX-S +SRK25ZJX-S | SRK20ZJX-S x 3 | SRK20ZJX-S x 3 | SRK20ZJX-S x 4 | SRK20ZJX-S x 4 | SRK20ZJX-S x 5 |
| Outdoor unit | SCM40ZJ-S | SCM45ZJ-S | SCM50ZJ-S1 | SCM60ZJ-S1 | SCM71ZJ-S1 | SCM80ZJ-S1 | SCM100ZJ-S1 |
| Energy class (cooling/heating) | A+/A+ | A+/A+ | A++/A | A++/A+ | A++/A | A++/A | A/A+ |
| SEER | 5.92 | 5.98 | 6.62 | 6.55 | 6.41 | 6.29 | 5.10 |
| SCOP (Average climate) | 4.05 | 4.03 | 3.95 | 4.01 | 3.81 | 3.81 | 4.02 |
| Pdesignc | kW | 4.00 | 4.50 | 5.00 | 6.00 | 7.10 | 8.00 |
| Pdesignh (@-10°C) | kW | 5.20 | 5.80 | 5.90 | 7.10 | 7.30 | 7.50 |
| Annual electricity consumption (cooling/heating) | kWh/a | 237/1798 | 264/2014 | 265/2091 | 321/2480 | 388/2682 | 446/2755 |
| Refrigerant (GWP) | | | | | R410A (1975) | | |
| Designated heating season | | | | | Average | | |

Dimensions


INDOOR UNIT

Wall Mounted type


**SRK20ZJX-S SRK25ZJX-S SRK35ZJX-S
SRK50ZJX-S1 SRK60ZJX-S2**

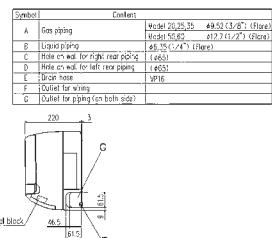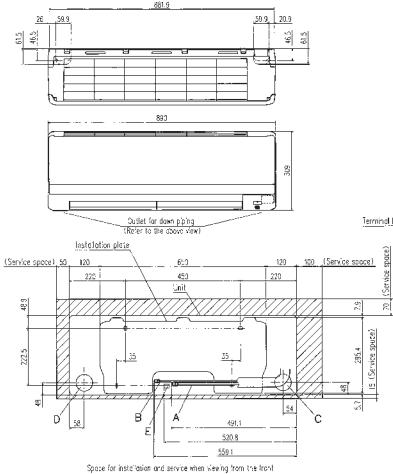


SRK20ZJ-S SRK25ZJ-S SRK35ZJ-S SRK50ZJ-S

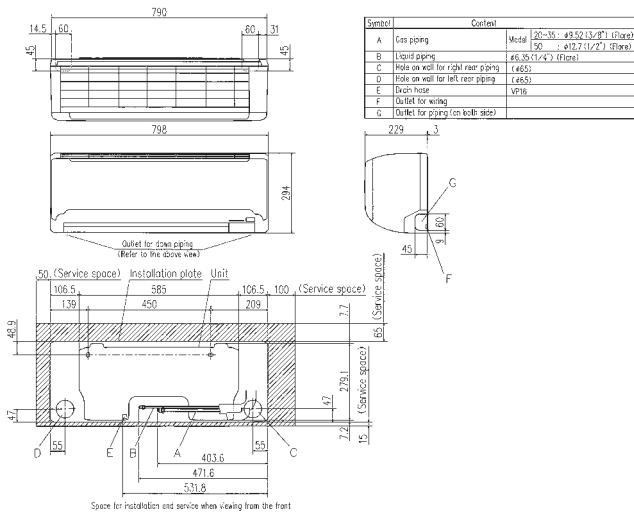


SRK63ZMP-S SRK71ZMP-S SRK45ZMP-S

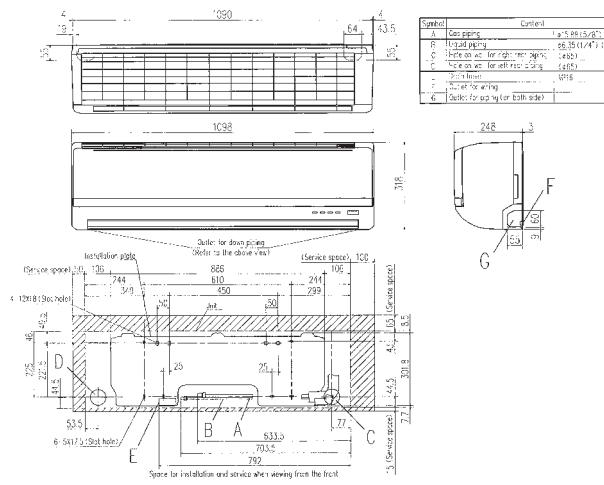

SRK63HE-S1 SRK71HE-S1

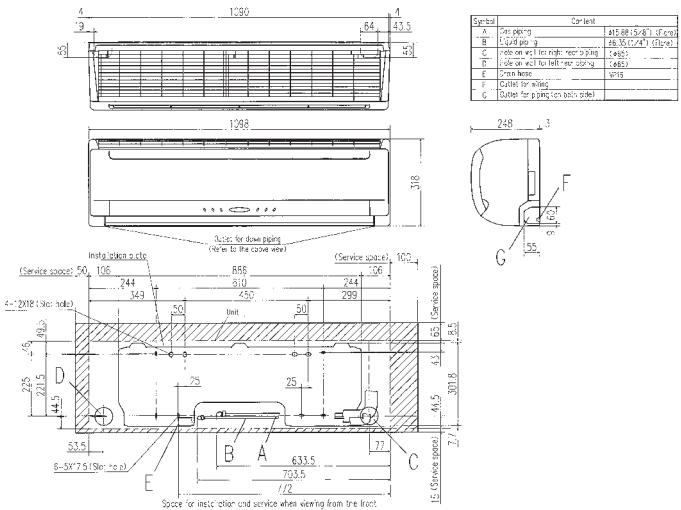

SRK20HG-S SRK28HG-S SRK40HG-S

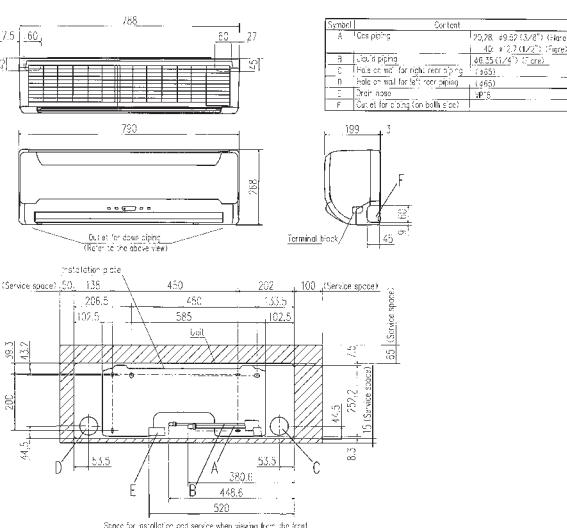

Dimensions


INDOOR UNIT

Wall Mounted type

SRK50HE-S1 SRK56HE-S1

Unit: mm


| Symbol | Content |
|--------|------------------------------------|
| A | Gas piping |
| B | Liquid piping |
| C | Hole on wall for right rear piping |
| D | Hole on wall for left rear piping |
| E | Drain hose |
| F | Outlet for piping (on both side) |

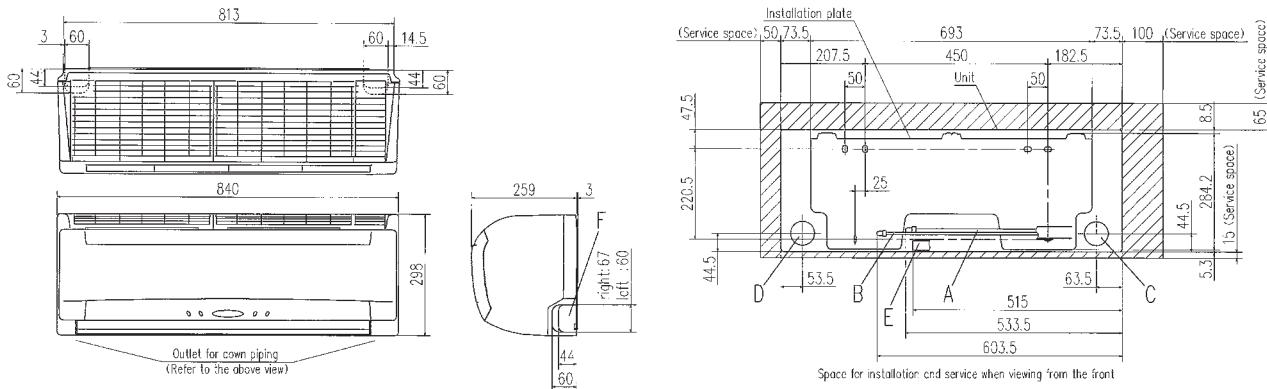

Floor Standing type

SRF25ZJX-S SRF35ZJX-S SRF50ZJX-S1




| Symbol | Content |
|--------|------------------------------------|
| A | Gas piping |
| B | Liquid piping |
| C | Hole on wall for right rear piping |
| D | Hole on wall for left rear piping |
| E | Drain nozzle |
| F | Screw point holes for indoor unit |
| G | Outline for holes (on both sides) |

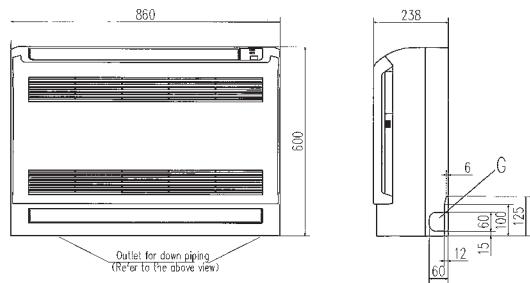

Ceiling Concealed

SRR25ZJ-S SRR35ZJ-S SRR50ZJ-S SRR60ZJ-S

| Symbol | | Content |
|--------|------------------|-------------------------|
| | Moel | SR25ZJ-S, JSZ-5 |
| A | Gas piping | Φ9.52 (3/8") (Flare) |
| B | Liquid piping | Φ5.35 (1/4") (Flare) |
| C | Drain piping | VP16 (D. 22) |
| D | Suspension belts | (M5) (M2) |

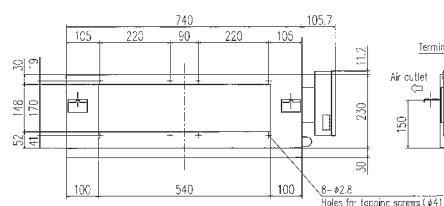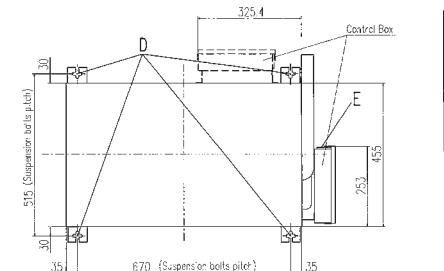


INDOOR UNIT

Unit: mm


4way Ceiling Cassette type

FDTC25VF FDTC35VF FDTC40VF FDTC50VF FDTC60VF

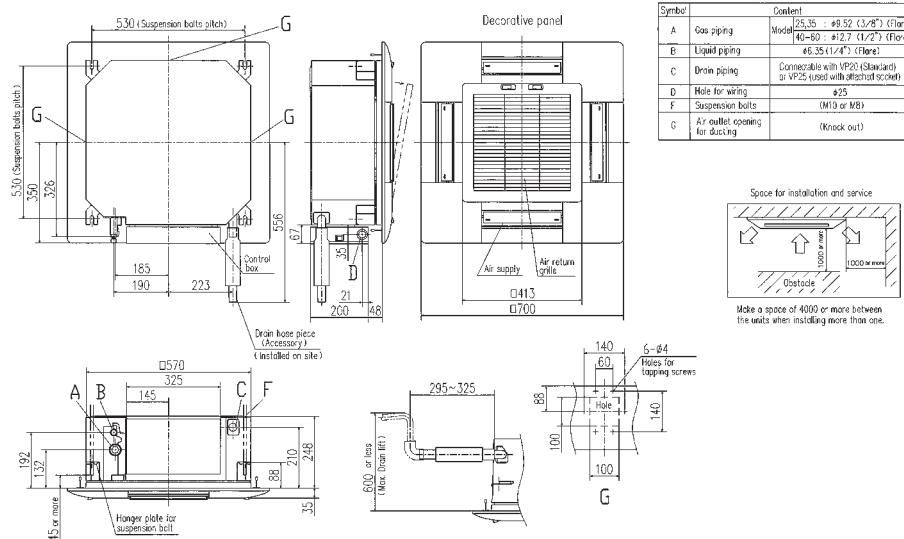


Duct Connected-Low/Middle Static Pressure-

FDUM50VF

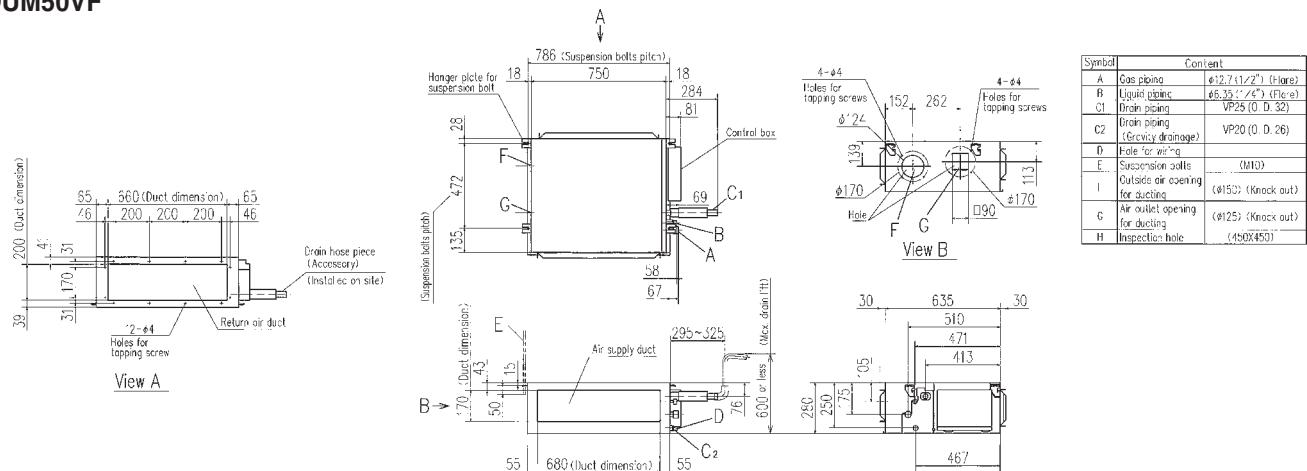

Ceiling Suspended

FDEN50VF

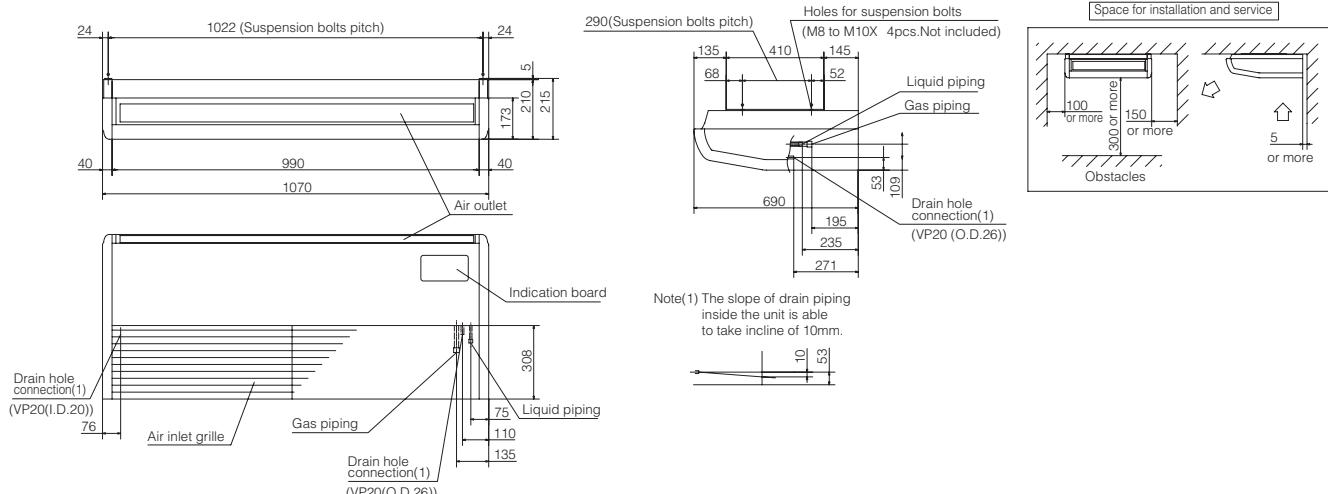

Dimensions

OUTDOOR UNIT

**SRC20ZJX-S SRC25ZJX-S SRC35ZJX-S
SRC45ZMP-S**

| Symbol | Content |
|--------|---|
| A | Service valve connection (gas side) $\varnothing 9.52(3/8")$ (Flare) |
| B | Service valve connection (liquid side) $\varnothing 6.35(1/4")$ (Flare) |
| C | Pipe/cable draw-out hole $\varnothing 6.35(1/4")$ (Flare) |
| D | Drain discharge hole $\#20\times2$ places |
| E | Anchor bolt hole M10x4 places |


20, 25, 35, 45

$\varnothing 9.52(3/8")$ (Flare) $\varnothing 12.7(1/2")$ (Flare)

$\varnothing 6.35(1/4")$ (Flare) $\varnothing 6.35(1/4")$ (Flare)

$\#20\times2$ places $\#20\times2$ places

M10x4 places M10x4 places

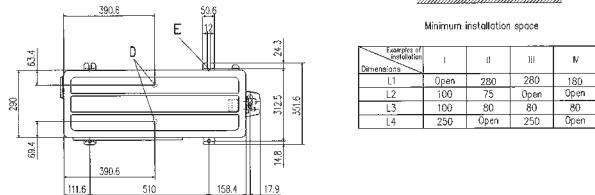

Minimum installation space

**SRC40ZJX-S SRC50ZJX-S SRC60ZJX-S
SRC50ZJ-S**

| Symbol | Content |
|--------|---|
| A | Service valve connection (gas side) $\varnothing 12.7(1/2")$ (Flare) |
| B | Service valve connection (liquid side) $\varnothing 6.35(1/4")$ (Flare) |
| C | Pipe/cable draw-out hole |
| D | Drain discharge hole $\#20\times5$ places |
| E | Anchor bolt hole M10x4 places |


40, 50, 60

$\varnothing 12.7(1/2")$ (Flare) $\varnothing 12.7(1/2")$ (Flare)

$\varnothing 6.35(1/4")$ (Flare) $\varnothing 6.35(1/4")$ (Flare)

$\#20\times5$ places $\#20\times5$ places

M10x4 places M10x4 places

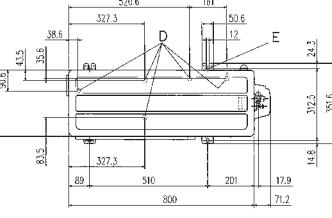

Minimum installation space

SRC20ZJ-S SRC25ZJ-S SRC35ZJ-S

| Symbol | Content |
|--------|---|
| A | Service valve connection (gas side) $\varnothing 9.52(3/8")$ (Flare) |
| B | Service valve connection (liquid side) $\varnothing 6.35(1/4")$ (Flare) |
| C | Pipe/cable draw-out hole |
| D | Drain discharge hole $\#20\times2$ places |
| E | Anchor bolt hole M10x4 places |


20, 25, 35

$\varnothing 9.52(3/8")$ (Flare) $\varnothing 12.7(1/2")$ (Flare)

$\varnothing 6.35(1/4")$ (Flare) $\varnothing 6.35(1/4")$ (Flare)

$\#20\times2$ places $\#20\times2$ places

M10x4 places M10x4 places

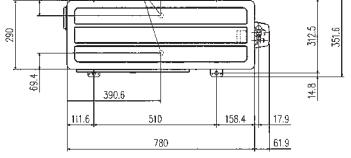

Minimum installation space

| Symbol | I | II | III | IV |
|--------|------|------|------|------|
| L1 | Open | 280 | 280 | 180 |
| L2 | 100 | 75 | Open | Open |
| L3 | 100 | 80 | 80 | 80 |
| L4 | 250 | Open | 250 | Open |

SCM25ZMP-S SCM35ZMP-S

| Symbol | Content |
|--------|---|
| A | Service valve connection (gas side) $\varnothing 9.52(3/8")$ (Flare) |
| B | Service valve connection (liquid side) $\varnothing 6.35(1/4")$ (Flare) |
| C | Pipe/cable draw-out hole |
| D | Drain discharge hole $\#20\times2$ places |
| E | Anchor bolt hole M10x4 places |


25, 35

$\varnothing 9.52(3/8")$ (Flare) $\varnothing 12.7(1/2")$ (Flare)

$\varnothing 6.35(1/4")$ (Flare) $\varnothing 6.35(1/4")$ (Flare)


$\#20\times2$ places $\#20\times2$ places

M10x4 places M10x4 places

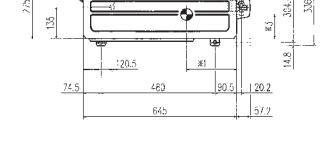

Minimum installation space

| Symbol | I | II | III | IV |
|--------|------|------|------|------|
| L1 | Open | 280 | 280 | 180 |
| L2 | 100 | 75 | Open | Open |
| L3 | 100 | 80 | 80 | 80 |
| L4 | 250 | Open | 250 | Open |

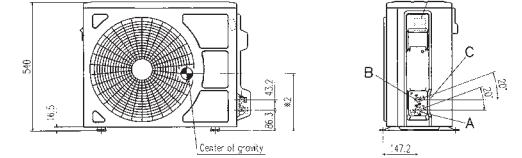

SRC20HG-S SRC28HG-S SRC40HG-S

| Symbol | Content |
|--------|---|
| A | Service valve connection (gas side) $\varnothing 20.6(3/8")$ (Flare) |
| B | Service valve connection (liquid side) $\varnothing 17.1(1/2")$ (Flare) |
| C | Pipe/cable draw-out hole |
| D | Drain discharge hole $\#20\times3$ places |
| E | Anchor bolt hole M10x4 places |


20, 28, 40

$\varnothing 20.6(3/8")$ (Flare) $\varnothing 17.1(1/2")$ (Flare)

$\varnothing 17.1(1/2")$ (Flare) $\varnothing 17.1(1/2")$ (Flare)

$\#20\times3$ places $\#20\times3$ places

M10x4 places M10x4 places

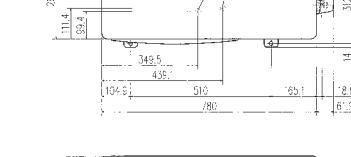

Minimum installation space

| Symbol | I | II | III | IV |
|--------|------|------|-----|------|
| L1 | Open | 650 | 650 | 450 |
| L2 | 100 | 100 | 100 | 100 |
| L3 | 100 | 80 | 80 | 80 |
| L4 | 650 | Open | 650 | Open |

SRC50HE-S1 SRC56HE-S1 SRC63HE-S1

| Symbol | Content |
|--------|---|
| A | Service valve connection (gas side) $\varnothing 12.7(1/2")$ (Flare) |
| B | Service valve connection (liquid side) $\varnothing 10(1/4")$ (Flare) |
| C | Pipe/cable draw-out hole |
| D | Drain discharge hole $\#20\times3$ places |
| E | Anchor bolt hole M10x4 places |


50, 56, 63

$\varnothing 12.7(1/2")$ (Flare) $\varnothing 10(1/4")$ (Flare)

$\varnothing 10(1/4")$ (Flare) $\varnothing 10(1/4")$ (Flare)


$\#20\times3$ places $\#20\times3$ places

M10x4 places M10x4 places

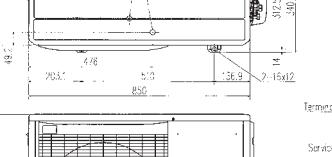


Minimum installation space

| Symbol | I | II | III | IV |
|--------|------|------|-----|------|
| L1 | Open | 865 | 865 | 585 |
| L2 | 100 | 100 | 100 | 100 |
| L3 | 100 | 80 | 80 | 80 |
| L4 | 865 | Open | 865 | Open |

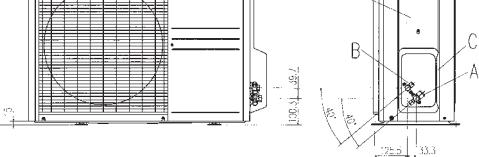


OUTDOOR UNIT


SRC63ZK-S SRC71ZK-S SRC80ZK-S
SRC71HE-S1

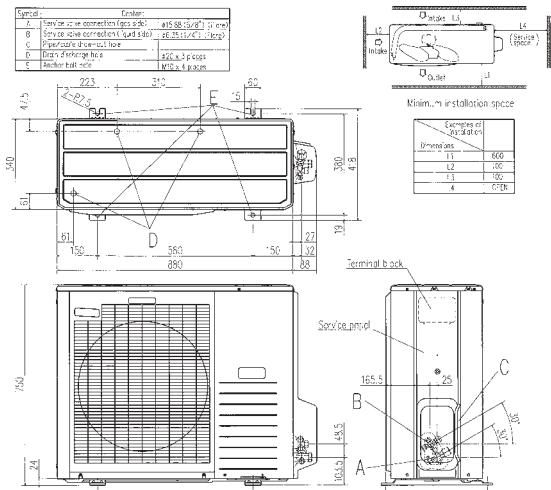


SCM40ZJ-S SCM45ZJ-S

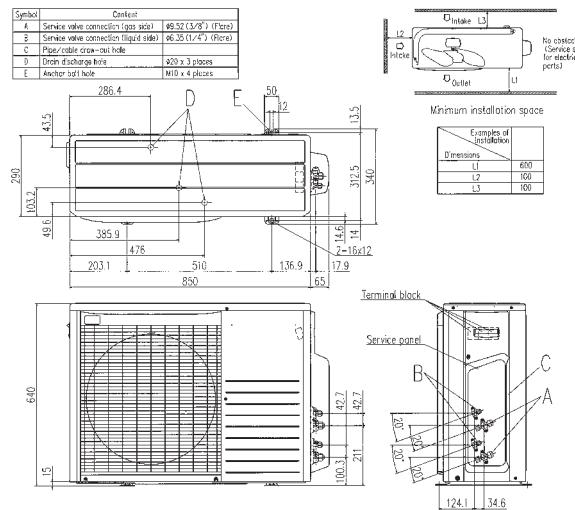


SCM100ZJ-S1

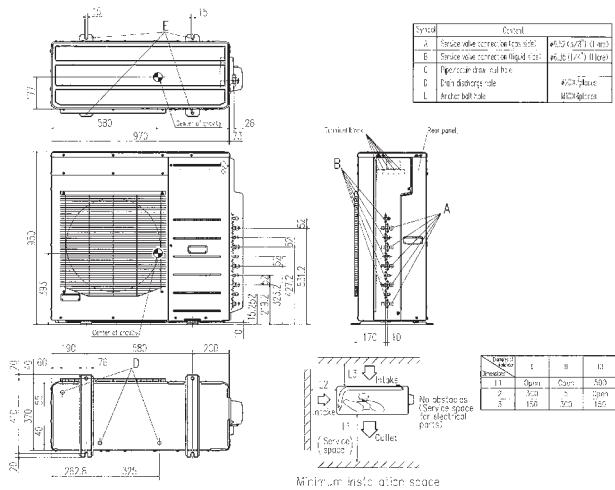


SCM50ZJ-S1 SCM60ZJ-S1

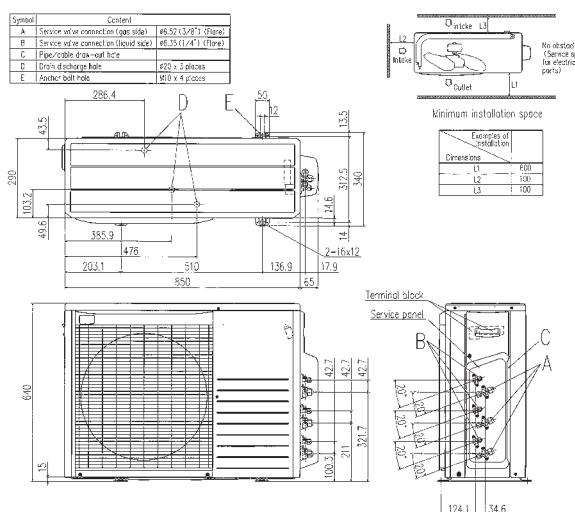

SCM125ZJ-S1

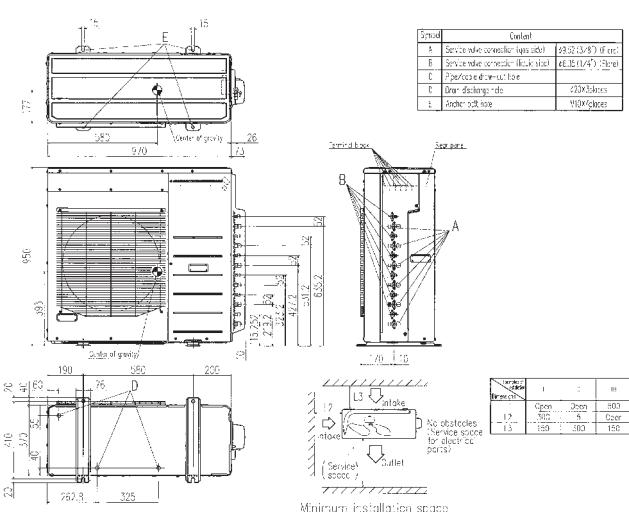

SCM71ZJ-S1 SCM80ZJ-S1

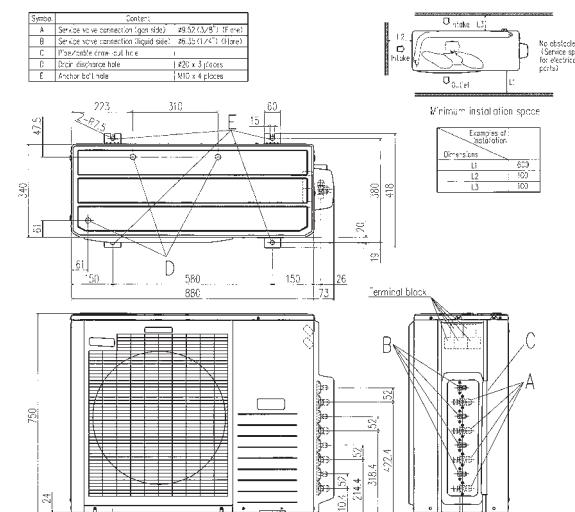

Before starting use

Heating performance

The heating performance values (kW) described in catalog are the values obtained by operating at an outdoor temperature of 7°C and indoor temperature of 20°C as set forth in the ISO Standards. As the heating performance decreases as the outdoor temperature drops, if the outdoor temperature is too low and the heating performance is insufficient, use other heating appliances as well.

Indication of sound values

The sound values are the values (A scale) measured in a chamber such as an anechoic chamber following the ISO Standards. In the actual installation state, the value is normally larger than the values given in the catalog due to the effect of surrounding noise and echo. Take this into consideration when installing.

Use in oil atmosphere

Avoid installing this unit in an atmosphere where oil scatters or builds up, such as in a kitchen or machine factory. If the oil adheres to the heat exchanger, the heat exchanging performance will drop, mist may be generated, and the synthetic resin parts may deform and break.

Use in acidic or alkaline atmosphere

If this unit is used in acidic atmosphere such as hot spring areas having high level of sulfuric gases or in alkaline atmosphere including ammonia or calcium chloride, places where the exhaust of the heat exchanger is sucked in, or at coastal areas where the unit is subject to salt breezes, the outer plate or heat exchanger, etc., will corrode. Please ask a dealer or specialist when you use an air conditioner in places differing from a general atmosphere.

Use in places with high ceilings

If the ceiling is high, install a circulator to improve the heat and air flow distribution when heating.

Refrigerant leakage

The refrigerant (R410A) used for the Residential Air conditioner is non-toxic and inflammable in its original state. However, in consideration of a state where the refrigerant leaks into the room, measures against refrigerant leaks must be taken in small rooms where the tolerable level could be exceeded. Take measures by installing ventilation devices, etc.

Use in snowy areas

Take the following measures when installing the outdoor unit in snowy areas.

•Snow-prevention

Install a snow-prevention hood so that the snow does not obstruct the air intake port or enter and freeze in the outdoor unit.

•Snow piling

In areas with heavy snow fall, the piled snow could block the air intake port. In this case, a frame that is 50cm or higher than the estimated snow fall must be installed underneath the outdoor unit.

Automatic defrosting device

If the temperature is low, and the humidity is high, frost will stick to the heat exchanger of the outdoor unit. If use is continued, the heating performance will drop.

The "Automatic defrosting device" will function to remove this frost.

After heating for approx. three to ten minutes, it will stop, and the frost will be removed. After defrosting, hot air will be blown again.

Servicing the air-conditioner

After the air-conditioner is used for several seasons, dirt will build up in the air-conditioner causing the performance to drop. In addition to regular servicing, we recommend the maintenance contract (charged for) by a specialist.

⚠ Safety Precautions

Air-conditioner usage target

The air-conditioner described in this catalog is a dedicated cooling/heating device for human use.

Do not use it for special applications such as the storage of foodstuffs, animals or plants, precision devices or valuable art, etc.

This could cause the quality of the items to drop, etc.

Do not use this for cooling vehicles or ships. Water leakage or current leaks could occur.

Before use

Always read the "User's Manual" thoroughly before starting use.

Installation

Always commission the installation to a dealer or specialist. Improper installation will lead to water leakage, electric shocks and fires.

Make sure that the outdoor unit is stable in installation. Fix the unit to stable base.

Usage place

Do not install in places where combustible gas could leak or where there are sparks.

Installation in a place where combustible gas could be generated, flow or accumulate, or places containing carbon fibers could lead to fires.



Mitsubishi Heavy Industries, Ltd.
Air-Conditioning & Refrigeration Systems
16-5, Konan 2-chome, Minato-ku, Tokyo, 108-8215 Japan
<http://www.mhi.co.jp>

Our factories are ISO9001 and ISO14001 certified.

Certified ISO 9001



SIWAJIMA PLANT
Mitsubishi Heavy Industries, Ltd.
Airconditioning & Refrigeration Systems Headquarters
Certified ISO 9001
Certificate number : JQA-EM0705

Certified ISO 14001



MITSUBISHI HEAVY INDUSTRIES-
MAHAJAK AIR CONDITIONERS CO., LTD.
Certified ISO 9001
Certificate number : 04104 1998 0813 ES



SIWAJIMA PLANT
Mitsubishi Heavy Industries, Ltd.
Air-conditioning & Refrigeration Systems Headquarters
Certified ISO 14001
Certificate number : JQA-EM0256



MITSUBISHI HEAVY INDUSTRIES-
MAHAJAK AIR CONDITIONERS CO., LTD.
Certified ISO 14001
Certificate number : 04104 1998 0813 ES



(COMPANY) participates in the ECC
programme for (PROGRAMME).
Check ongoing validity of certificate:
www.eurovent-certification.com or
www.certiflash.com



Not on
HQ/HG models